


⚠ WARNING

1. Only qualified electricians should install this luminaire. All electrical and grounded connections MUST be in accordance with National Electrical Code and the Canadian Electrical Code, and any applicable local code requirements.
2. In case of smoke, or spark emerging from the wire, please turn off the power supply to the wire immediately and notify the relevant personnel.
3. Minimum 90°C Supply Conductor Requirement.
4. Do not expose this fixture to direct water. This fixture is not waterproof and is ONLY suitable for damp locations.
5. Please do not stare directly at the LED Lights, and wear gloves before installing the fixture to avoid an injury.
6. Please inspect the fixture for probable damages (arising from shipment) before installing and contact ARANI immediately.
7. Please confirm all accessories are included in the box and read the installation instructions carefully prior to installing the fixture.
8. This fixture is designed to operate in ambient temperatures ranging from -40° to 40°C. Using it in temperatures outside this range will reduce its lifespan.
9. Switch OFF the main power supply (at the fuse/ circuit breaker) before wiring-in the fixture.
10. Please clean the luminaire regularly to ensure maintenance and its longevity.

Model Number	Input voltage	Color temperature	Power Selectable	Rated Current
VPT0110W-8VTADHV14P3CK-V4A	120-347Vac	Selectable 3500K/4000K/5000K	110W/90W/75W/65W	1.1A

Product Dimensions

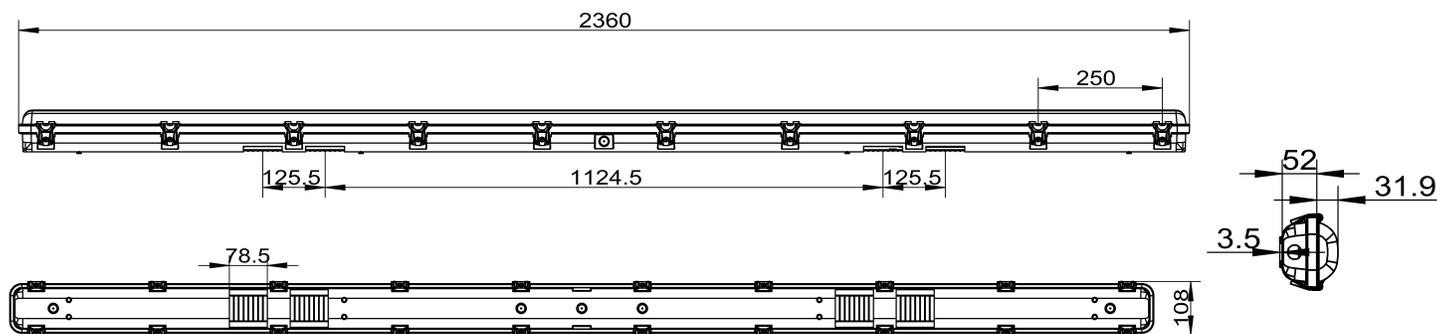

Installation instruction

Surface Mounting

1. Use the appropriate mounting screws to secure the Surface Mounting Brackets to the Mounting Surface. The recommended Surface Mounting Brackets distance (center to center) is 54.13" (for 8FT).
2. Unlatch the Lens and Tray Assembly from the Housing. The Pre-installed Tether Cables will prevent the Lens and Tray Assembly from falling down (As shown in Fig 1)
3. Insert the flexible power cable (not included) through the cable gland - to ensure sufficient length of the stripped cable inside the housing - and tighten the gland. (For electrical connection see Fig. 3)
4. Secure the Lens and the Tray Assembly to the Housing by clamping the latch down. Be careful not to pinch the wires.
5. Push the Housing into the Surface Mounting Brackets as shown in Fig 2. Ensure that the Housing is secure to the Surface Mounting Brackets.

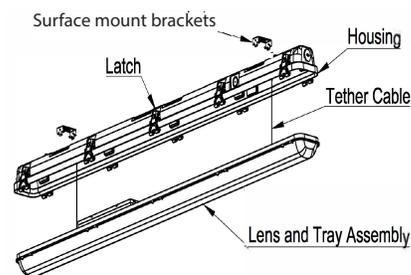


Fig 1

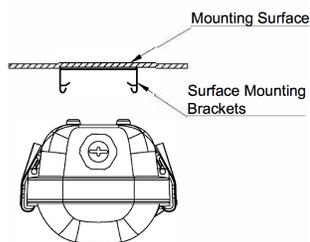


Fig 2

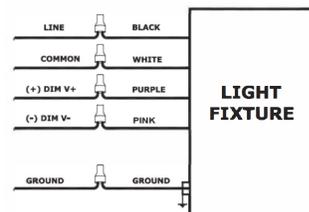


Fig 3

Pendant Mounting

1. Secure the Surface Mounting Brackets to the Housing as shown in Fig 4.
2. Loop the V-Hook on the Surface Mounting Bracket as shown in Fig 4.
3. To suspend the Housing, connect each V-Hook to two equal lengths of the chain (not included) and/or appropriate hardware suitable for the mounting surface. The Chains must be suitable to support four (4) times the weight of the fixture.

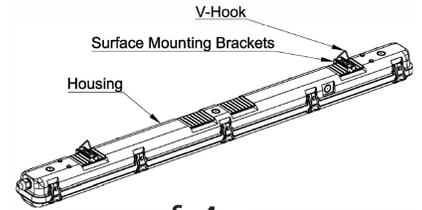


fig 4