

CANOPIES

CNP40-3CCT+W | CNP100-3CCT+W



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

- LED Canopy Light are suitable for using in wet locations
- Please keep the LED Canopy Light away from any corrosive substance, and please use dry cloth when you clean it
- Before installation or maintenance, please disconnect the power to prevent electric shock

CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.

- Electrical products can cause death or injury, or damage to property.
- If in any doubt about the installation or use of this product, consult a competent electrician.

APPLICATION NOTICE

1. DO NOT cover the fixtures with flammable materials.
2. Misuse of, or changes to the fixture shall nullify the guarantee.
3. Make sure the working voltage of LED Canopy light is under its rated voltage.
4. Make sure the accessories and wires are completed and intact during the installation.
5. Do not expose any wire to edge of sheet metal and/or other sharp objects that may cause damage or abrasion.
6. Do not change existing open holes or create any additional open holes in the fixture or its components during installation.
7. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
8. Do not use the LED Canopy Light near heating appliances/ elements.
9. The input voltage and lamps should be matched after connecting the power line, please make sure the wiring section is insulated.
10. LED Canopy Light is not intended for use with emergency exits.


MODEL	INPUT VOLTAGE	FREQUENCY	POWER	RATED CURRENT
CNP40-3CCT+W	AC120-347V	50/60Hz	20/30/40W	0.367A
CNP100-3CCT+W	AC120-347V	50/60Hz	60/80/100W	0.917A

CCT AND POWER SELECTABLE

1. Before installation, unscrew the M25 cap counter-clockwise at the back of the lamp by slot type screwdriver.

2. According to the tags, customer can select the corresponding power and CCT dip switch, dial to the required power and CCT.

3. After finish the requires power and CCT adjustment, Tighten the M25 cap clockwise by slot type screwdriver.



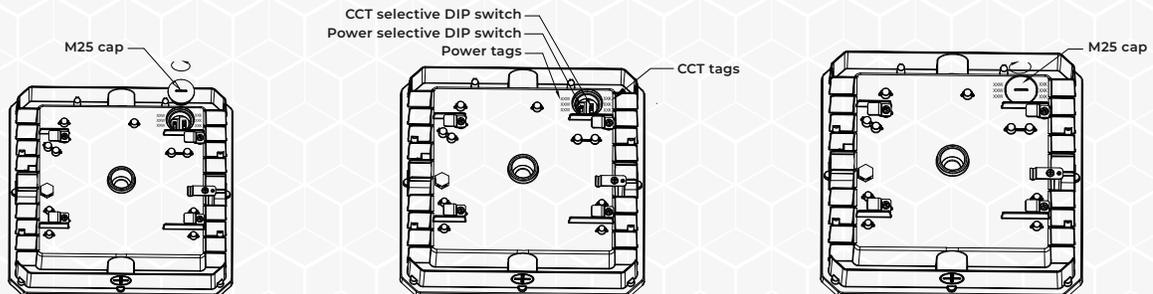


ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

INSTALLATION GUIDE

CEILING INSTALLATION


1. Loosen the screw to take off the mounting plate from the lamp.
2. Screw the mounting plate to the ceiling.
3. Hang the lamp on the ring so as to connect wires with terminal caps.



4. Hook up lamp on the mounting plate.





5. Secure the screw. Installation completed.

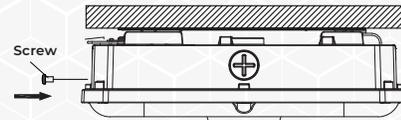




POLE-PENDANT INSTALLATION

1. Connecting wires with terminal caps as picture shows.
2. Rotating the pole to make it fixed with lamp. Installation completed.

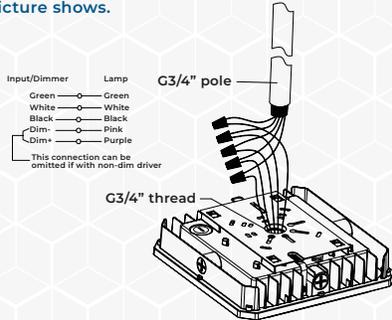

PLUG SENSOR INSTALLATION

1. Unscrew the PC cap on the lampshade counter-clockwise with a flat-head screwdriver on the lamp which already installed.
2. Screw the sensor clockwise by hands.
3. After tighten the sensor, Lighting the lamp, if the sensor works well, the installation finish.

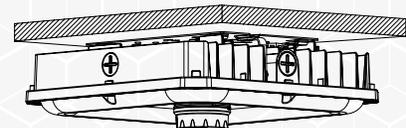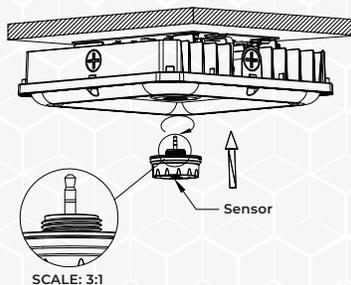

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.