

Projet:	Type:	Qté:
----------------	--------------	-------------

Wall Pack Full Cutoff Adjustable 80-70-60W 120-347V 3000-4000-5000K

The SpecLite Full Cutoff Wall Pack is a robust and versatile outdoor lighting solution, ideal for the most demanding outdoor environments. Available in two versions, a fixed 20W model and an adjustable 80W model, which can be set down to 20W, it perfectly adapts to the specific needs of each project. Its color temperature (CCT: 3000K, 4000K, 5000K) and lighting angle are also adjustable, offering optimal flexibility during installation. Made from cast aluminum, this wall pack is resistant to corrosion and impacts, ensuring exceptional durability. Additionally, it is equipped with an integrated photocell that automatically adjusts the lighting based on ambient brightness, optimizing energy efficiency. The SpecLite wall pack guarantees reliable and long-lasting performance.



CARACTERISTICS

- Full Cutoff Design: Completely eliminates light pollution, providing targeted and optimal outdoor lighting. Compliant with "Dark Sky" requirements.
- Integrated photocell: Automates lighting based on ambient light, ensuring activation from dusk to dawn.
- High-end minimalist aesthetics: Sleek design that seamlessly integrates with any type of architectural project.
- DLC Premium Certified: Ensures maximum eligibility for subsidies while providing durable and reliable performance.

NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
AW	00	C	R	F	C	080	0	P	SS
Wall pack full cutoff	120°	clear	bronze	120-347V	3000-4000-5000K	80-70-60W	N/A	int. photo.	SS

PHOTOMETRIC SPECIFICATIONS

LUMENS	10,622
CCT	3CCT (3000-4000-5000K)
ANGLE	120°
C.R.I.	73
DIMMABLE	0-10V DC
PHOTOCELL	Integrated Photocell
SENSOR	Motion Sensor Receptacle
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	208
LED VOLTAGE	180-260V
LED MAX CURRENT	200-400MA
FLICKER	Flicker-Free

ELECTRICAL SPECIFICATIONS

REAL POWER	81.3 W
VOLTAGE	120-347V
EFFICIENCY	130.65 lm/w
POWER FACTOR	94.7 %
T.H.D	10.5 %
FREQUENCY	50/60Hz

CERTIFICATIONS


REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-F01Z9L
FCC	No
BARCODE	882110008042
ENVIRONMENTAL	IP65
IK PROTECTION	IK06
SURGE PROTECTION WITH GROUNDING	6KV
SURGE PROTECTION WITHOUT GROUNDING	6KV

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Bronze
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	2.50 KG

OPERATING TEMP.	-40°C ~ 45°C
APPLICATION	Indoor / Outdoor
INSTALLATION	Wall Mount
CABLE LENGTH	N/A


DIMENSIONS

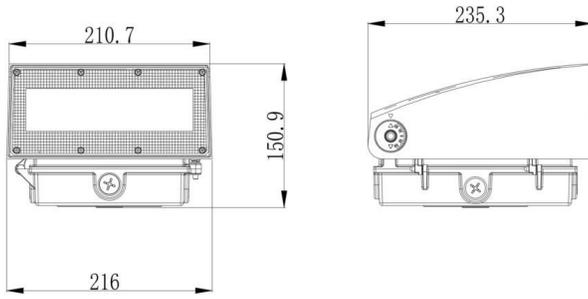

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
24.70 cm X 22.80 cm X 16.90 cm	48.10 cm X 26.70 cm X 37.80 cm	4	10.00 kg	96 
9 3/4 " X 9 " X 6 5/8 "	18 7/8 " X 10 1/2 " X 14 7/8 "		22.05 lbs	

PRODUCTS IMAGES

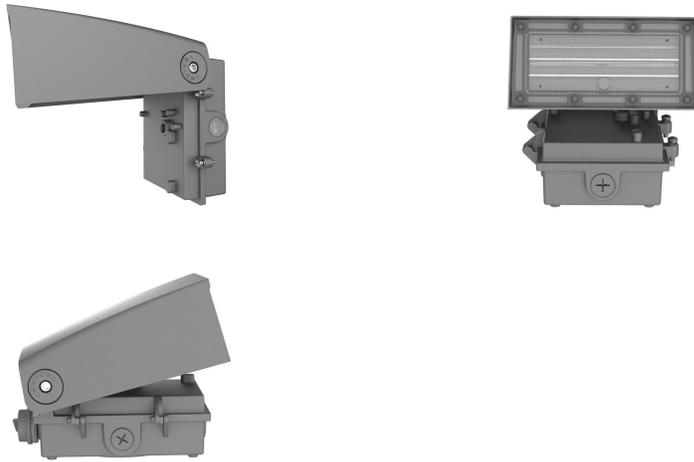

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7