

Projet:

Type:

Qté:

Ceiling Light 9" 18W 120V 3000-4000-5000K

Easy to install and integrated with a CCT selection option, the SpecLite ceiling light will simplify your project. Equipped with a dip switch to select your preferred lighting color between 3000K, 4000K, and 5000K, this light fixture is compatible with 120V (AC) and is available in 2 different finishes (White and Black) and 2 different sizes (9" and 12"). The SpecLite ceiling light is perfect for creating a customized lighting ambiance while being easy to install and use. Its sleek design and flexibility make it an ideal choice for modernizing residential and commercial interiors.

CHARACTERISTICS

- Integrated 3CCT Selection: Choose from three color temperatures for lighting that suits any atmosphere.
- Wide Compatibility: Operates on 120VAC and allows for quick installation and maintenance with Wago connectors.
- TRIAC Dimming: Compatible with Triac dimmers for precise light intensity control.
- Diffuse and Comfortable Lighting: Provides soft, even light, ideal for creating a calming atmosphere.

**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
CE	09	F	W	A	C	018	0	D	SY
Ceiling light	9"	frost	white	120V	3000-4000-5000K	18W	N/A	dim TRIAC	SY

PHOTOMETRIC SPECIFICATIONS

LUMENS	2,000
CCT	3CCT (3000-4000-5000K)
ANGLE	140°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD2835
LED QTY	144
LED VOLTAGE	54V
LED MAX CURRENT	300mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Polycarbonate
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	0.90 KG
OPERATING TEMP.	-10°C ~ 40°C

ELECTRICAL SPECIFICATIONS


REAL POWER	18 W
VOLTAGE	120V
EFFICIENCY	111.11 lm/w
POWER FACTOR	97 %
T.H.D	20 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	FCC
BARCODE	882110006871
ENVIRONMENTAL	IP44
IK PROTECTION	
SURGE PROTECTION WITH GROUNDING	1.5KV
SURGE PROTECTION WITHOUT GROUNDING	0.9KV

APPLICATION	Indoor
INSTALLATION	Surface Mount
CABLE LENGTH	N/A

DIMENSIONS

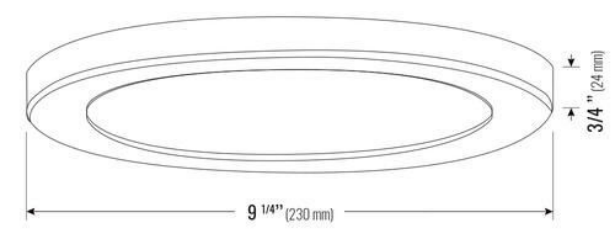

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
24.00 cm X 24.00 cm X 6.00 cm	60.50 cm X 25.00 cm X 25.50 cm	10	11.50 kg	320 
9 1/2 " X 9 1/2 " X 2 3/8 "	23 7/8 " X 9 7/8 " X 10 "		25.35 lbs	

PRODUCTS IMAGES

3 Color Options



3000K 4000K 5000K

GOONILED 12" LED Flush Mount Ceiling Lights give you a perfect lighting solution, with 3 color temperatures to choose from & credit different ambience to your space.

Switch between three color temperature modes

W N C







5%-100% Dimmable Brightness

Brightness can be adjusted for different occasions and time, no flashing, no noise.



100% 50% 5%



Brand	Recommend Dimmer Model No.	
LUTRON	CTCL-153P	DVCL-153P
	CTCL-153PR	DVCL-153PR
	SCL-153P	DVWCL-135P
	MACL-153M	LGCL-135P
LEVITON	2C3005	1E1306

NOTE: Absence of a dimmer on this chart does not imply incompatibility, please reference the dimmer manufacturer's instructions for installation and further information.

Compatible Dimmers

Brand	Model	Image	Match	Brand	Model	Image	Match
LUTRON	MACL-153MR-WH		5★	Leviton	6672-1LW		5★
LUTRON	SCL-153P-WH		5★	Leviton	DSL06-1LZ		3★
LUTRON	PD-6WCL-WH		5★	Leviton	6674-P0W		3★
LUTRON	CTCL-153P-WH		5★	Leviton	IPL06-10Z		3★
LUTRON	MSCL-OP153M-WH		4★	 100% - 5% Smooth line dimming, compatible with most LED dimmers in North America market.			
LUTRON	DVCL-153P-WH		3★				
LUTRON	DWW-603PGH-WH		2★				

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7