

Projet: Type: Qté:

**Canopy light 80-60-40-20W 120-347V 35-40-50K**

The SpecLite Canopy Light is a versatile solution that allows you to adjust the wattage and color temperature to meet your specific needs. Available in three selectable wattages (80W, 60W, 40W, and 20W) and three adjustable color temperatures (3500K, 4000K, and 5000K), this luminaire is ideal for both indoor and outdoor applications that require efficient and durable lighting. Designed for various environments such as gas stations, covered parking lots, and industrial areas, the SpecLite Canopy Light offers easy surface installation and exceptional durability with its die-cast aluminum body and frosted polycarbonate lens. Ready for a motion sensor (sold separately) and ready for 0-10V dimming, it maximizes energy savings while ensuring optimal lighting performance. DLC Premium certified, this light fixture guarantees superior energy efficiency, while offering weather resistance with its IP65 protection rating. The lumen maintenance is also ensured with an L70 lifespan of 50,000 hours. Ideal for replacing energy-consuming fixtures, the SpecLite Canopy Light combines performance, flexibility, and savings, while perfectly adapting to all your commercial and industrial lighting applications.



**CARACTERISTICS**

- Zhaga-compatible occupancy sensor sold separately.
- Standards Compliance: cUL and DLC Premium certified, ensuring safety, energy savings, and access to maximum subsidies.
- Featuring a sleek, modern silhouette with its circular design, it offers an innovative and harmonious aesthetic to any environment.
- Complete Flexibility: Three color temperatures (3500K, 4000K, 5000K), three available power levels, and universal voltage (120-347VAC) for truly versatile use.

**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
CP	10	F	W	F	C	080	M	D	SS
Canopy	10x10"	frost	white	120-347V	35-40-50K	80-60-40-20W	motion ready 3pins	dim 0-10V	SS

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	10,400
CCT	3500K/4000K/5000K
ANGLE	150°(±5°)
C.R.I.	85
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	Motion Sensor Receptacle
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	192
LED VOLTAGE	220V
LED MAX CURRENT	85mA
FLICKER	Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Aluminium, Powder Coated
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate

**ELECTRICAL SPECIFICATIONS**


REAL POWER	80 W
VOLTAGE	120-347V
EFFICIENCY	130 lm/w
POWER FACTOR	95.5 %
T.H.D	8.8 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-3CHZM4
FCC	No
BARCODE	882110008028
ENVIRONMENTAL	IP65
IK PROTECTION	IK06
SURGE PROTECTION WITH GROUNDING	6KV
SURGE PROTECTION WITHOUT GROUNDING	4KV

<b>LENS FINISH</b>	Clear
<b>WEIGHT</b>	2.00 KG
<b>OPERATING TEMP.</b>	-40°C ~ 45°C
<b>APPLICATION</b>	Indoor / Outdoor
<b>INSTALLATION</b>	Surface Mount
<b>CABLE LENGTH</b>	N/A

## DIMENSIONS

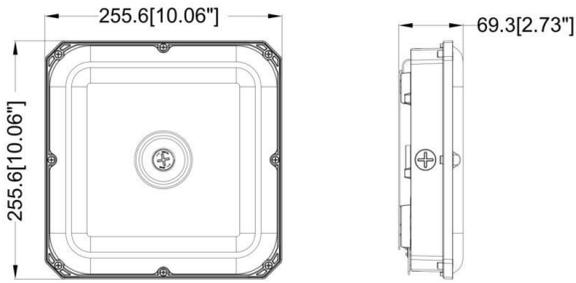

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
26.40 cm X 26.40 cm X 7.80 cm 10 3/8 " X 10 3/8 " X 3 1/8 "	33.60 cm X 28.30 cm X 28.80 cm 13 1/4 " X 11 1/8 " X 11 3/8 "	4	9.30 kg 20.50 lbs	144 

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7