



PART # _____

JOB NAME _____

TYPE _____



DRU

- Choose from 4 fixture styles with multiple diameters
- Powered by the LEDCR G2 light engine — easily replaceable & upgradeable
- Suitable for dry and damp locations
- Optional emergency battery backup
- **SIMPLE & NETWORK LIGHTING CONTROLS**

POWERED BY THE LEDCR
SCAN FOR THE LEDCR SPEC SHEET



DRD

SUPERFLEX SWITCH BETWEEN 4 WATTAGES & 3 CCTS

10 YEAR WARRANTY	120-277V	0-10V DIM TO OFF	12V AUX OUTPUT	OPTIONAL NETWORK LIGHTING CONTROL	OPTIONAL SIMPLE OCC	OPTIONAL EMG BATTERY BACKUP	120° BEAM ANGLE	80+ CRI	-4°F TO 140°F OPERATING TEMP	100,000hrs RATED LIFE

PART #	UPC	WATTAGE	LUMENS	LPW	CCT
RP-DRU-11N-14L-40K-WC-G2-A	844006022617	FLEXWATT 6W/ 10W /16W/22W	780-3124	130-142	FLEXCOLOR 3000K/3500K/ 4000K
RP-DRU-14N-14L-40K-WC-G2-A	844006022624				
RP-DRD-14N-14L-40K-WC-G2-A	844006040673				
RP-DRD-18N-14L-40K-WC-G2-A	844006040697				

DEFAULT WATTAGE AND CCT ARE SHOWN IN BOLD.





PART NUMBER BUILDER

MFR	PRODUCT	SIZE	LUMENS	CCT	FUNCTION	GENERATION	ORDER CODE	CONTROLS	EMG
RP				XXK	WC	G2			EMG
	DRU	11N = 11IN 14N = 14IN	8L,14L, 23L,31L	XX=CCT 30=3000K 35=3500K 40=4000K	WC = FLEXWATT + FLEX COLOR		-A = FACTORY ORDER CODE	-OC1 -OCLR -OCBT -BT -BTX	4W - 500 LUMENS @ 90 MIN - SHIPS SEPARATELY
	DRD	14N = 14IN 18N = 18IN							

EXAMPLE PART NUMBER RP-DRU-11N-14L-40K-WC-G2-A-OC1

* EMG NOT AVAILABLE WITH THE TOUGH DRUM



DEFAULT LUMEN PACKAGE (WATTAGE AND CCT) ARE SHOWN BELOW IN BOLD. There are two ways to achieve a non-default lumen package and/or CCT -
1. You can easily adjust in the field via our FlexWATT and FlexCOLOR internal switches. **2.** Have us adjust the FlexWATT and FlexCOLOR at the factory for an additional charge.

EMERGENCY BATTERY BACKUP OPTIONS CAN ALSO BE ORDERED SEPARATELY.
 SCAN QR CODE FOR FULL FULHAM EMG SPEC SHEET.

CONTROL OPTIONS

SIMPLE LIGHTING CONTROLS



-OC1

MICROWAVE AND
DAYLIGHT HARVESTING
OCCUPANCY SENSOR
IR12 REMOTE



-OCLR

LIMITED-RANGE MICROWAVE
AND DAYLIGHT HARVESTING
OCCUPANCY SENSOR
IR12 REMOTE



NETWORK LIGHTING CONTROLS



-OCBT

SILVAIR-READY BLUETOOTH
MICROWAVE AND DAYLIGHT
HARVESTING OCCUPANCY SENSOR
IR12 REMOTE & SILVAIR APP



IR REMOTE SETS SENSOR RANGE ONLY

-BT

SILVAIR-READY
BLUETOOTH
CONTROL NODE
SILVAIR APP



-BTX

SILVAIR-READY BLUETOOTH
CONTROL NODE W/
EXTERNAL ANTENNA
SILVAIR APP



Light Efficient Design/RemPhos has partnered with Silvaair to offer fixtures and retrofits w/ a wireless Bluetooth-mesh eco-system. Silvaair is listed on the DLC NLC QPL certified to Technical Requirements Version 5.1. Our Silvaair controls meet all eligibility criteria of integral, fixture-mounted, addressable sensors with motion and photocell/ambient light-sensing capabilities, along with embedded programming that can be configured and networked. System can control motion response, illumination levels, and scheduling.

DLC INFORMATION - LOW OUTPUT (STAIRWELL AND PASSAGEWAY LUMINAIRES)

PART #	DLC CODE	DLC	WATTAGE	CCT	TOTAL LUMENS
RP-DRD-14N-14L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-SVN49Y	●	6/10/16/22W	30/35/40K	2497
RP-DRD-14N-23L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-YKRRJN	●	6/10/16/22W	30/35/40K	2497
RP-DRD-14N-31L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-2HHDWC	●	6/10/16/22W	30/35/40K	2497
RP-DRD-14N-8L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-GYTF4L	●	6/10/16/22W	30/35/40K	2497
RP-DRD-18N-14L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-9VQWJ0	●	6/10/16/22W	30/35/40K	2607
RP-DRD-18N-23L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-SYWDVJ	●	6/10/16/22W	30/35/40K	2607
RP-DRD-18N-31L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-C1HXV3	●	6/10/16/22W	30/35/40K	2607
RP-DRD-18N-8L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-0RYSYZ	●	6/10/16/22W	30/35/40K	2607
RP-DRU-11N-14L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-LBTQ80	●	6/10/16/22W	30/35/40K	2439
RP-DRU-11N-23L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-4DT3HF	●	6/10/16/22W	30/35/40K	2439
RP-DRU-11N-31L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-6THPN5	●	6/10/16/22W	30/35/40K	2439
RP-DRU-11N-8L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-CWM82Y	●	6/10/16/22W	30/35/40K	2439
RP-DRU-14N-14L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-50GCB4	●	6/10/16/22W	30/35/40K	2439
RP-DRU-14N-23L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-BWDPJG	●	6/10/16/22W	30/35/40K	2439
RP-DRU-14N-31L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-MQ2YK3	●	6/10/16/22W	30/35/40K	2439
RP-DRU-14N-8L-XXK-WC-G2-[OCX;BT;BTX]-[EMG;blank]-[BZ;BR;blank]-[AA;A;blank]	S-CHQQR8	●	6/10/16/22W	30/35/40K	2439

FAMILY CODE: UUUWBJ ● STANDARD ● PREMIUM

HEADQUARTERS & TRAINING CENTER • Cary, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA

847.380.3540 • led-llc.com • sales@led-llc.com

12.03.25 Information is subject to change without notice.


Light Efficient Design



CCT SELECTION

LUMEN SELECTION	830	835	840
8L	780LM, 6W	780LM, 6W	816LM, 6W
14L	1370LM, 10W	1440LM, 10W	1370LM, 10W
23L	2256LM, 16W	2240LM, 16W	2352LM, 16W
31L	2970LM, 22W	3080LM, 22W	3124LM, 22W

DRU - HIGH-TRANSMISSION DRUM 11IN OR 14IN

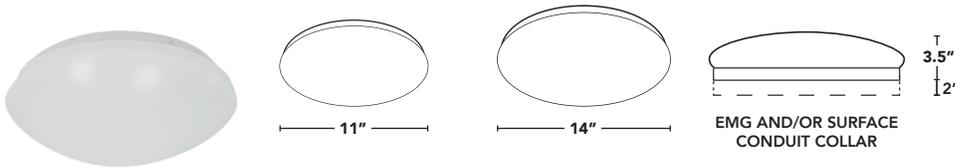


- Flexible lens made from high transmission, UV blocking acrylic plastic.
- Thick metal, white painted base.
- Lens attaches to metal base via twist lock (no tools required).
- Available in 11in and 14in diameters.

PART #	UPC	WATTAGE	LUMENS	LPW	CCT	QUICK SHIP
RP-DRU-11N-14L-40K-WC-G2-A	844006022617	FLEXWATT 6W/ 10W /16W/22W	780-3124	130-142	FLEXCOLOR 3000K/3500K/ 4000K	✓
RP-DRU-11N-14L-40K-WC-G2-OC1-A	844006022631					
RP-DRU-14N-14L-40K-WC-G2-A	844006022624					
RP-DRU-14N-14L-40K-WC-G2-OC1-A	844006022648					

DEFAULT WATTAGE AND CCT ARE SHOWN IN BOLD.

DRD - DESIGNER DRUM 14IN OR 18IN

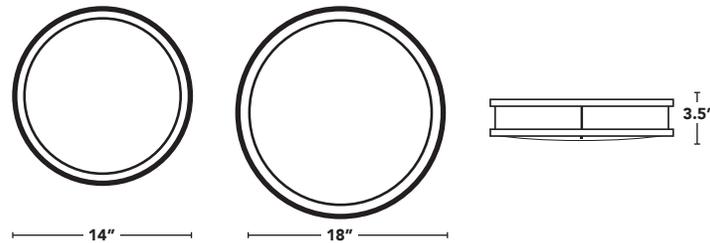

PART #	UPC	WATTAGE	LUMENS	LPW	CCT	QUICK SHIP
RP-DRD-14N-14L-40K-WC-G2-A	844006040673	FLEXWATT 6W/ 10W /16W/22W	780-3124	130-142	FLEXCOLOR 3000K/3500K/ 4000K	✓
RP-DRD-14N-14L-40K-WC-G2-OC1-A	844006040680					
RP-DRD-18N-14L-40K-WC-G2-A	844006040697					
RP-DRD-18N-14L-40K-WC-G2-OC1-A	844006040703					

DEFAULT WATTAGE AND CCT ARE SHOWN IN BOLD.



FLEXWATT™ TECHNOLOGY

HOW DOES IT WORK?

- Our exclusive LED driver is designed to operate at 90%+ efficiency at each wattage setting. Standard drivers would have much lower efficiency as low as 60% and would result in poor performance and reduced efficacy.

WHAT ARE THE WATTAGE CHOICES?


- Please reference this table and the ordering guide on the last page of the cut sheet.



FLEXWATT TURN DIAL POSITION				
STYLE	0	1	2	3
LEDCR	6W (8L)	10W (14L)	16W (32L)	22W (31L)

HOW EASY IS IT TO SET?

- Simply slide off the driver door, adjust the 4-position turn dial with a small, flat-head screw driver, and replace the door. Quick and easy.
- Can be "locked-out" to prevent field-adjustability if desired.

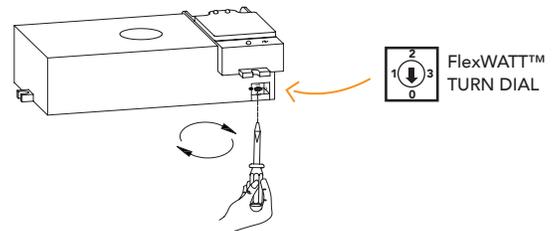

FLEXCOLOR™ TECHNOLOGY

HOW DOES IT WORK?

- We select the highest efficacy, multi-color LED diodes from quality suppliers and mount them on the same circuit board.
- A proprietary LED binning process ensures color consistency between fixtures, while the FlexColor technology controller ensures the correct color is selected, every time.

WHAT ARE THE COLOR CHOICES?


- 3000K, 3500K, and 4000K. Please reference this table and the ordering guide on the last page of the cut sheet.




3000K	3000°K WARM - TOP
3500K	3500°K NEUTRAL - MIDDLE
4000K	4000°K NEUTRAL - BOTTOM

HOW EASY IS IT TO SET?

- Adjust the 3-position slide switch with your fingers. Quick and easy.
- Can be "locked-out" to prevent field-adjustability if desired.

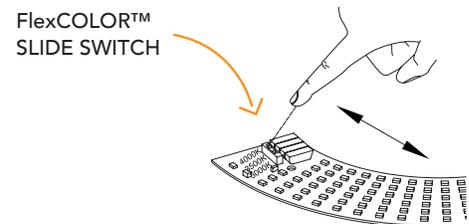

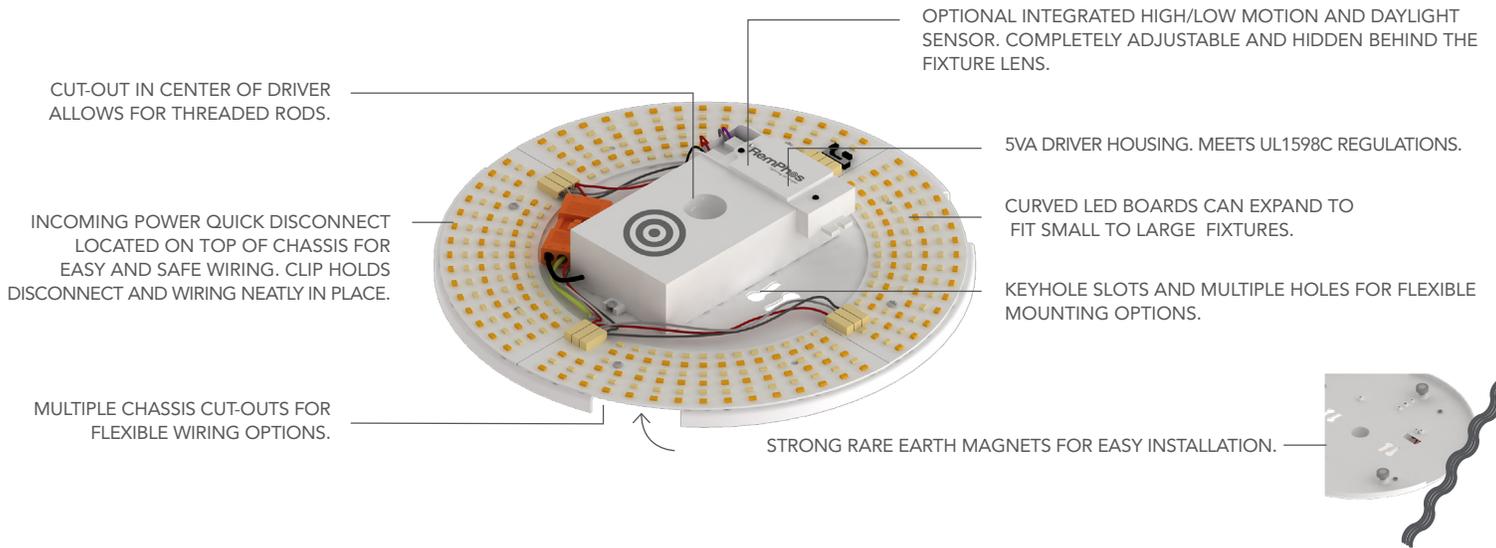

EASILY RETROFIT THESE FIXTURE STYLES AND MORE!





URNS ON WHEN POWER GOES OFF



90 MIN RUN TIME




41°F TO 131°F
OPERATING TEMP



OPTIONAL EMG
BATTERY BACKUP

EMG DRIVER DIMENSIONS

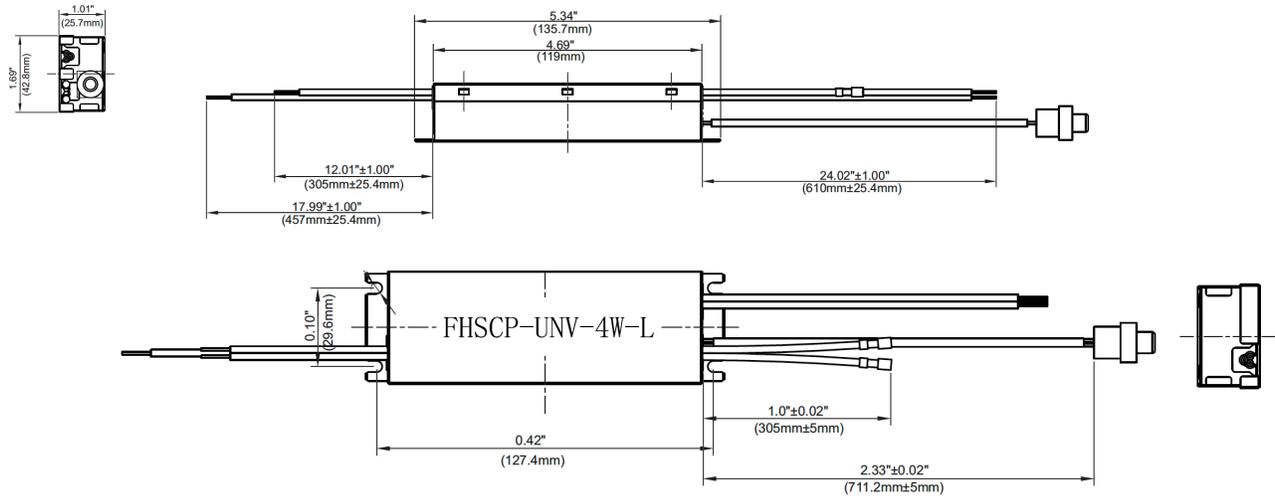



PRODUCT SPEC	INFORMATION
INPUT VOLTAGE / FREQUENCY	120-277V~, 50/60Hz
INPUT CURRENT	100mA Max
INPUT POWER	3W
STANDBY POWER	<0.85W
DRIVER TYPE	Constant Power
CURRENT RATED	333mA@12V, 73mA@55V
OUTPUT VOLTAGE RANGE	12-55V
OUTPUT POWER	4W
OUTPUT CLASS	LED Class 2
NUMBER OF OUTPUT CHANNELS	1
TEST SWITCH	Included
PILOT LIGHT	Red Light
BATTERY ON/OFF	Wire + Connector
LOCATION TYPE	Dry Location
INPUT SURGE PROTECTION	Line-Neutral 1kV, Line & Neutral-Ground 2kV
EMERGENCY MODE PROTECTIONS	Battery Over Voltage Protection
RFI/EMI	FCC Part 15 Class A
AMBIENT OPERATING TEMPERATURE RANGE	5°C To 55°C(41°F To 131°F)
BATTERY TYPE	LiFePO4
BATTERY VOLTAGE	6.4V
BATTERY CAPACITY	2Ah Max
BATTERY CHARGE CURRENT	165mA
BATTERY RECHARGE TIME	12 Hours
BATTERY DISCHARGE TIME	Minimum 90 Minutes
SERVICE LIFE	50,000 Hours
WARRANTY	5 Years



MICROWAVE AND DAYLIGHT HARVESTING OCCUPANCY SENSOR


ADDING -OC1 TO THE **DRUM** PART NUMBERS UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **SIMPLE CONTROL** UTILIZING A MICROWAVE MOTION SENSOR. IT ALSO COMES EQUIPPED W/ A DAYLIGHT HARVESTING SENSOR TO DIM AND/OR TURN OFF THE **DRUM** WHEN THE SPACE IS UNOCCUPIED OR SURROUNDING NATURAL LIGHT LEVELS ARE HIGH.



ATTRIBUTES


DETECTION TECHNOLOGY	MICROWAVE
DETECTION TYPE	OCCUPANCY
SENSOR POWER	12VDC
GROUPABLE	NO
NETWORK LIGHTING CONTROL	NO
COMMISSIONING METHOD	IR REMOTE
REMOTE	IR12
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	NO
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	NONE
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES
CONTROL CAPACITY	10 FIXTURES

IR12 REMOTE

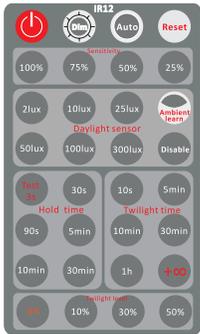

- Permanent ON/OFF Function
- Dim +/-
- Sensor Mode
- Reset Function
- Ambient Learn
- Test Mode


FOR MORE INFORMATION ON THE IR12 REMOTE SCAN BELOW

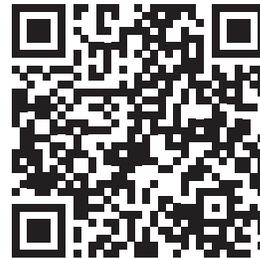

DETECTION PATTERN / -OC1


CEILING MOUNTING

DETECTION RANGE (FT)

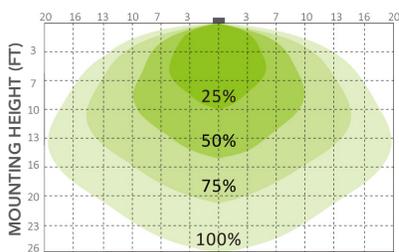

WALL MOUNTING


DETECTION DISTANCE (FT)

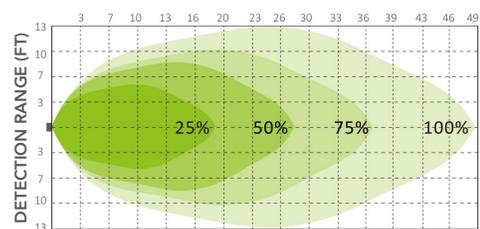

DAYLIGHT HARVESTING / -OC1

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even w/o movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light meets target level).

NOTE LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPERATE WITHOUT MOTION WHEN STAND-BY IS SET TO + ∞.

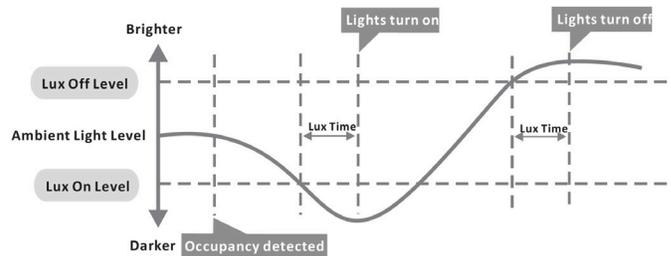



LIMITED-RANGE MICROWAVE AND DAYLIGHT HARVESTING OCCUPANCY SENSOR


ADDING -OCLR TO THE DRUM PART NUMBERS UPGRADES THE FIXTURE W/ A FACTORY INSTALLED SIMPLE CONTROL UTILIZING A MICROWAVE MOTION SENSOR. IT ALSO COMES EQUIPPED W/ A DAYLIGHT HARVESTING SENSOR TO DIM AND/OR TURN OFF THE DRUM WHEN THE SPACE IS UNOCCUPIED OR SURROUNDING NATURAL LIGHT LEVELS ARE HIGH.



ATTRIBUTES


DETECTION TECHNOLOGY	MICROWAVE
DETECTION TYPE	OCCUPANCY
SENSOR POWER	12VDC
GROUPABLE	NO
NETWORK LIGHTING CONTROL	NO
COMMISSIONING METHOD	IR REMOTE
REMOTE	IR12
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	NO
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	NONE
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES
CONTROL CAPACITY	10 FIXTURES

IR12 REMOTE

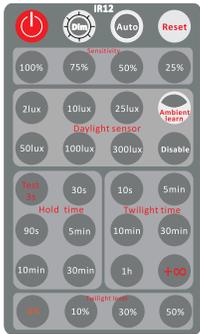


- Permanent ON/OFF Function
- Dim +/-
- Sensor Mode
- Reset Function
- Ambient Learn
- Test Mode

FOR MORE INFORMATION ON THE IR12 REMOTE SCAN BELOW

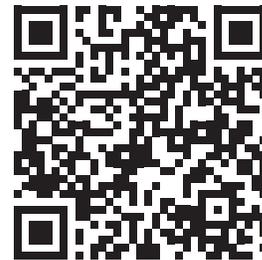


DETECTION PATTERN / RC-OCLR

CEILING MOUNTING

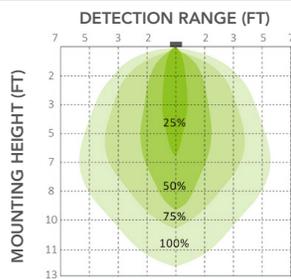


WALL MOUNTING

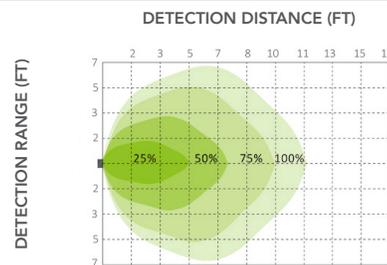

DAYLIGHT HARVESTING / -OCLR

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even w/o movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light meets target level).

NOTE LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPERATE WITHOUT MOTION WHEN STAND-BY IS SET TO + ∞.

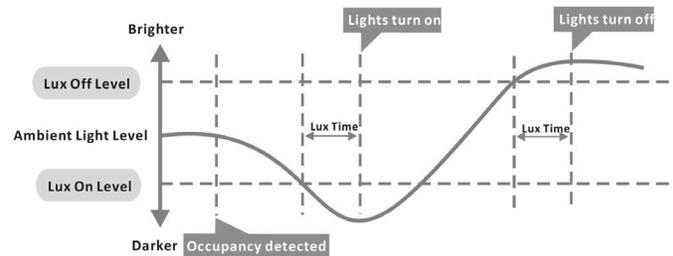



SILVAIR-READY BLUETOOTH MICROWAVE AND DAYLIGHT HARVESTING OCCUPANCY SENSOR

ORDERING **-OCBT**, IN ADDITION TO THE LBI MAX PART NUMBER, UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **NETWORK LIGHTING CONTROL**. ONCE CONNECTED THROUGH THE SILVAIR APP, THE BLUETOOTH MICROWAVE MOTION SENSOR AND DAYLIGHT HARVESTING TECHNOLOGY CAN MAXIMIZE ENERGY SAVINGS.



ATTRIBUTES

DETECTION TECHNOLOGY	MICROWAVE
DETECTION TYPE	OCCUPANCY / VACANCY
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMMISSIONING METHOD	SILVAIR APP + IR REMOTE FOR RANGE SETTING
REMOTE	IR 12
DAYLIGHT HARVESTING	YES
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	YES
NETWORK TECHNOLOGY	SILVAIR BLUETOOTH MESH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC
CONTROL CAPACITY	10 FIXTURES

IR12 REMOTE




IR REMOTE FOR SENSITIVITY RANGE SETTING ONLY




FOR MORE INFO SCAN ABOVE

SILVAIR APP

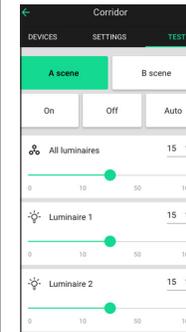

SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.




FOR MORE INFO SCAN ABOVE

DETECTION PATTERN / -OCBT


CEILING MOUNTING

DETECTION RANGE (FT)

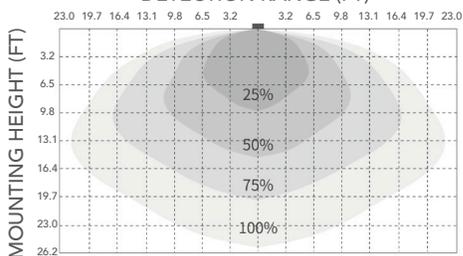


WALL MOUNTING


DETECTION DISTANCE (FT)

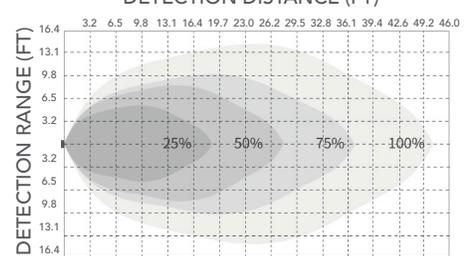

DIMENSIONS / -OCBT

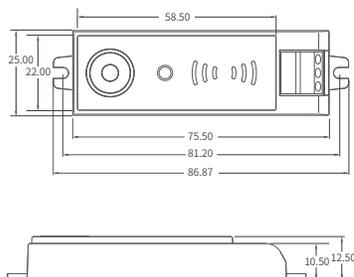

WIRING DIAGRAM / -OCBT

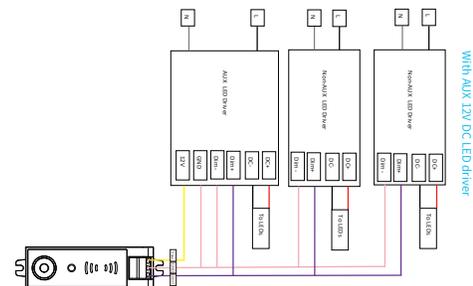

SILVAIR-READY BLUETOOTH CONTROL NODE


ADDING **-BT** TO THE **DRUM** PART NUMBER UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **NETWORK LIGHTING CONTROL**. CONNECT THROUGH THE SILVAIR APP WITH BLUETOOTH MESH TECHNOLOGIES. CAN BE PAIRED W/ A SWITCH FOR WIRELESS DIMMING CONTROL OR CONNECT TO OTHER FIXTURES W/ SENSORS TO MAXIMIZE COST SAVINGS.




ATTRIBUTES

DETECTION TECHNOLOGY	NONE
DETECTION TYPE	NONE
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMMISSIONING METHOD	NONE
REMOTE	SILVAIR APP
DAYLIGHT HARVESTING	NO
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	NO
NETWORK TECHNOLOGY	BLUETOOTH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC


SILVAIR APP

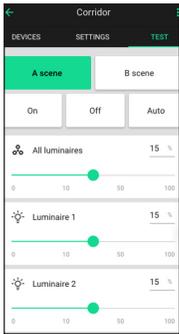

SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.



FOR MORE INFORMATION ON THE SILVAIR APP SCAN BELOW





SILVAIR-READY BLUETOOTH CONTROL NODE W/ EXTERNAL ANTENNA


ADDING **-BTX** TO THE **DRUM** PART NUMBER UPGRADES THE FIXTURE W/ A FACTORY INSTALLED **NETWORK LIGHTING CONTROL**. CONNECT THROUGH THE SILVAIR APP WITH BLUETOOTH MESH TECHNOLOGIES. CAN BE PAIRED W/ A SWITCH FOR WIRELESS DIMMING CONTROL OR CONNECT TO OTHER FIXTURES W/ SENSORS TO MAXIMIZE COST SAVINGS.




ATTRIBUTES

DETECTION TECHNOLOGY	NONE
DETECTION TYPE	NONE
SENSOR POWER	12VDC
GROUPABLE	YES
NETWORK LIGHTING CONTROL	YES
COMMISSIONING METHOD	NONE
REMOTE	SILVAIR APP
DAYLIGHT HARVESTING	NO
HI OR LOW TRIM	YES
BI-LEVEL DIMMING	NO
NETWORK TECHNOLOGY	BLUETOOTH
INSTALLATION TYPE	INTERNAL
DLC LISTED	YES + DLC NLC


SILVAIR APP

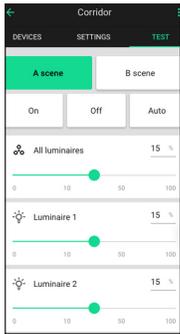


SILVAIR IS A SOFTWARE AND COMMISSIONING APP THAT CONNECTS AND CONTROLS LIGHTING FIXTURES USING BLUETOOTH MESH TECHNOLOGY.



FOR MORE INFORMATION ON THE SILVAIR APP SCAN BELOW



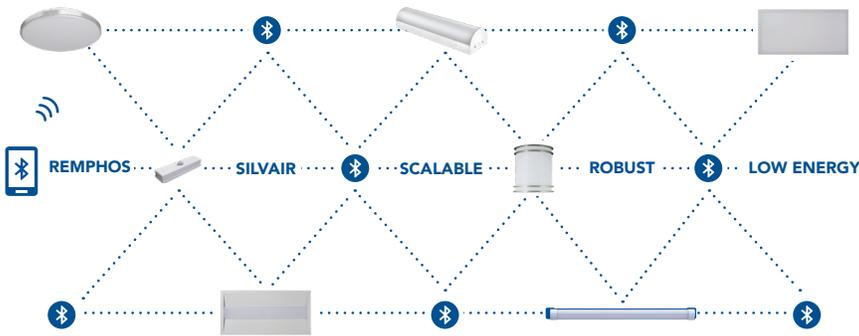

WHAT IS SILVAIR?

Silvaair is a software and commissioning app that connects and controls lighting fixtures using Bluetooth mesh technology.

HOW DOES IT CONNECT?

Silvaair can be set up in advance through the cloud and the Silvaair portal. It can also be commissioned in the field with the IOS app.

DOWNLOAD SILVAIR APPS



MOBILE APP Apple App Store
or
WEB APP platform.silvaair.com

