

Projet: Type:

**Split Downlight 40-34-27W 120-347V 3000-3500-4000K**

Upgrade your lighting with these sleek, color-selectable architectural downlights, designed for effortless installation and a modern look. The reflector with different diameters (4", 6" and 8") could be paired to adapt any installation.

**CARACTERISTICS**

- Colour Selectable 3000K/3500K/4000K
- 120-347V universal driver
- Wattage Selectable 40W-34W-27W
- Built-in junction box for easy installation



**NOMENCLATURE**

| SERIE           | DIMENSIONS | LENS  | BODY COLOUR | VOLTAGE  | CCT             | MAX POWER | OPTIONS 1 | OPTIONS 2 | VER. |
|-----------------|------------|-------|-------------|----------|-----------------|-----------|-----------|-----------|------|
| DL              | 4D         | F     | S           | F        | C               | 040       | 0         | D         | OK   |
| Split Downlight | 4"         | frost | Silver      | 120-347V | 3000-3500-4000K | 40-34-27W | N/A       | dim 0-10V | OK   |

**PHOTOMETRIC SPECIFICATIONS**

|                       |                   |
|-----------------------|-------------------|
| LUMENS                | 3,200             |
| CCT                   | 3000K/3500K/4000K |
| ANGLE                 | 55°               |
| C.R.I.                | 80                |
| DIMMABLE              | 0-10V DC          |
| PHOTOCELL             | N/A               |
| SENSOR                | N/A               |
| LUMEN MAINTENANCE L70 | 50,000 hrs        |
| LED TYPE              | SMD 5050          |
| LED QTY               | 24                |
| LED VOLTAGE           | 30-42V            |
| LED MAX CURRENT       | 1A                |
| FLICKER               | Flicker-Free      |

**MECHANICAL SPECIFICATIONS**

|                  |              |
|------------------|--------------|
| HOUSING MATERIAL | Aluminium    |
| HOUSING FINISH   | Silver       |
| LENS MATERIAL    | PMMA         |
| LENS FINISH      | Frost        |
| WEIGHT           | 0.65 KG      |
| OPERATING TEMP.  | -20°C ~ 45°C |
| APPLICATION      | Indoor       |
| INSTALLATION     | Recessed     |
| CABLE LENGTH     | N/A          |

**ELECTRICAL SPECIFICATIONS**


|              |          |
|--------------|----------|
| REAL POWER   | 40 W     |
| VOLTAGE      | 120-347V |
| EFFICIENCY   | 80 lm/w  |
| POWER FACTOR | 90 %     |
| T.H.D        | 20 %     |
| FREQUENCY    | 50/60Hz  |

**CERTIFICATIONS**

|                                    |              |
|------------------------------------|--------------|
| REGULATORY LISTING                 | cUL          |
| EFFICIENCY LISTING                 | Energy Star  |
| DLC ID                             |              |
| FCC                                | No           |
| BARCODE                            | 882110007977 |
| ENVIRONMENTAL                      | IP40         |
| IK PROTECTION                      | N/A          |
| SURGE PROTECTION WITH GROUNDING    | 3KV          |
| SURGE PROTECTION WITHOUT GROUNDING | 2KV          |



## DIMENSIONS

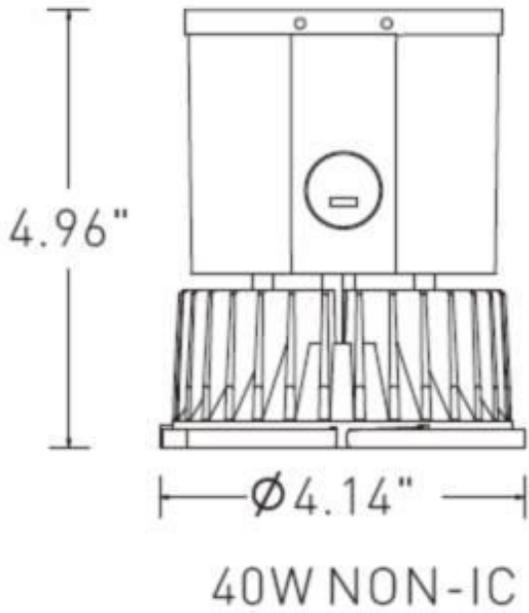

## PACKAGING

| DIMENSION INNER CARTON                                     | DIMENSION OUTER CARTON                                       | QUANTITY MASTER | MASTER WEIGHT        | PALLET QUANTITY   |
|--|--|-----------------|----------------------|---|
| 12.00 cm X 12.00 cm X 12.50 cm<br>4 3/4" X 4 3/4" X 4 7/8" | 34.50 cm X 23.50 cm X 30.00 cm<br>13 5/8" X 9 1/4" X 11 3/4" | 12              | 8.81 kg<br>19.42 lbs | 528  |

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7