

Wall Pack 10

WP10-15W-25W-VAR-V4

Model Number: WAL10R0025W-H-MV-TCP(PT)-V4




⚠ WARNINGS

1. Only qualified electricians should install this luminaire. All electrical and grounded connections **must** comply with the **National Electrical Code (NEC)**, the **Canadian Electrical Code (CEC)**, and any applicable local code requirements.
2. In case of smoke or sparks emitting from the wires, immediately turn off the power supply and notify the relevant personnel.
3. Ensure that the supply conductor has a minimum temperature rating of **90°C**.
4. This fixture is designed for use in **wet environments but is not intended for submersion in water**.
5. Do not look directly at the LED lights. **Always wear gloves** when handling or installing the fixture to avoid injury.
6. Inspect the luminaire for any damage (e.g., during shipping) before installation, and contact **ARANI** immediately if any issues are found.
7. Confirm that all accessories are included in the box. Carefully read the installation instructions prior to beginning the installation process.
8. This fixture is designed to operate in ambient temperatures ranging from **-40°C to 45°C**. Using it outside this range will reduce its lifespan.
9. The fixture is equipped with an integrated photocell. Adding an external photocell could cause malfunctions and damage.
10. Switch off the main power supply (fuse or circuit breaker) before wiring the fixture.
11. Clean the luminaire regularly to ensure proper maintenance and longevity.

Specification


Power	Input Voltage	Maximum Current	Color Temperature
25W/20W/15W	120-347Vac (Rated)	0.275A	3000K/4000K/5000K

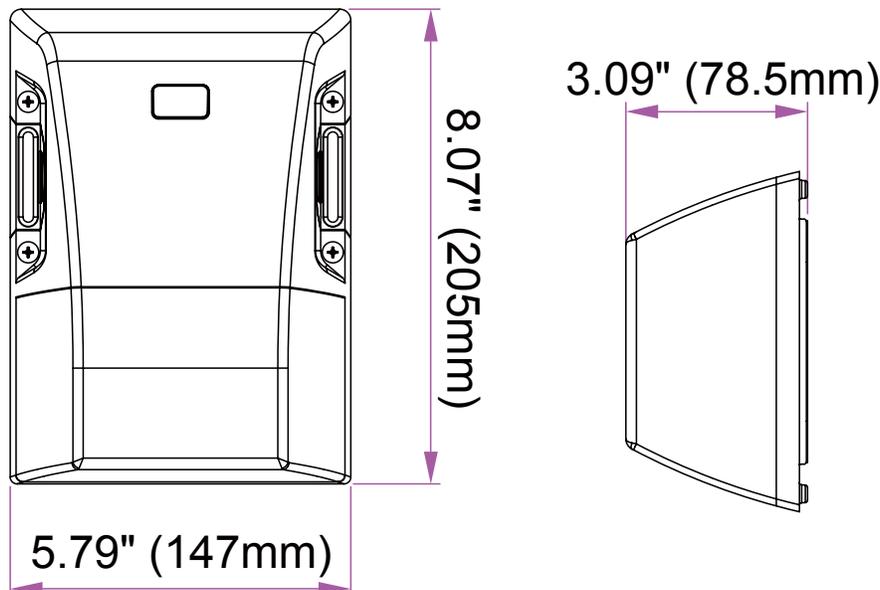

Installation Instructions


1

Using a screwdriver, unscrew the fixing screws of the lamp's mounting plate and carefully remove the mounting plate.

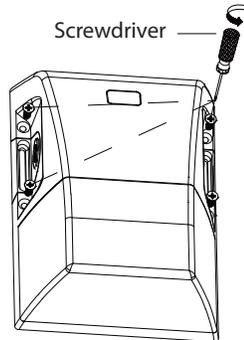


2

Using a hammer, knock out at least two mounting holes, ensuring they are in symmetrical positions. Press the bracket against the wall with your hand, and use a pen to mark the positions for the mounting screws.

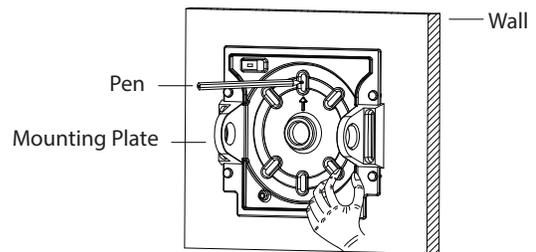


3

Use an electric drill to drill holes at the marked positions, with a diameter of 5/16" (8mm) and a depth of 1-1/2" (40mm). Then, use a hammer to insert the plastic anchors into the holes.

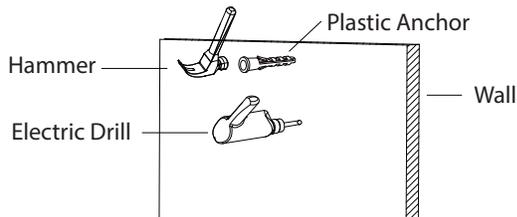


4

Attach the bracket to the wall and secure the luminaire to the bracket using the safety cord. Feed the power supply wires through the central hole and connect them as illustrated below. Finally, seal the exit point of the wires from the wall with silicone.

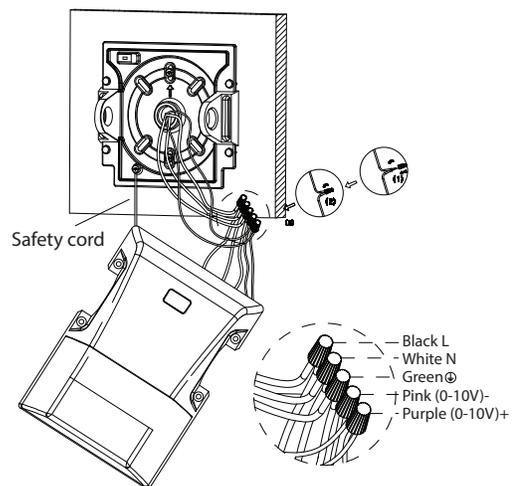

5

Turn the fixture over to reveal the wattage and CCT adjustment switches. Adjust them to the desired wattage and CCT as shown in the figure.

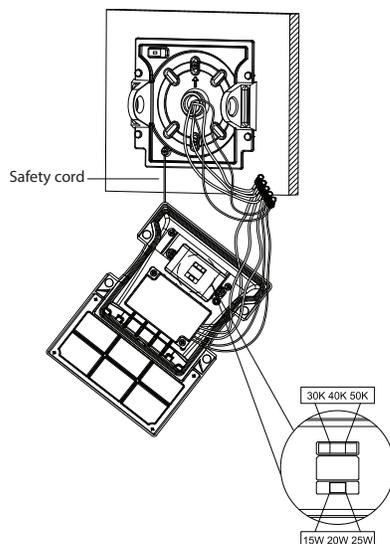

6

Place the lamp back onto the mounting plate and tighten the screws to complete the installation.

