

## FLUSH MOUNTS

1701-12SN-5CCT | 1702-14SN-5CCT



### WARNING

**WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.**

- LED Flush mounts are suitable for using in damp locations
- Please keep the LED Flush mounts away from any corrosive substance, and please use dry cloth when you clean it
- Before installation or maintenance, please disconnect the power to prevent electric shock

### CAUTION

**PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.**

- Electrical products can cause death or injury, or damage to property.
- If in any doubt about the installation or use of this product, consult a competent electrician.


## APPLICATION NOTICE

1. Turn OFF the power supply at the fuse or circuit breaker box before you install the fixture.
2. Ground the fixture to avoid potential electric shocks and to ensure reliable starting.
3. Double-check all connections to be sure they are tight and correct.
4. Wear rubber soled shoes and work on a sturdy wooden ladder.
5. This fixture is designed for use in a circuit protected by a fuse or circuit breaker. The fixture is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
6. **WARNING — RISK OF CUTS:** Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.
7. **WARNING — RISK OF FIRE:** Use 120V AC 50/60Hz circuits.
8. **DO NOT** change the LED light source or driver inside under any circumstance.
9. **DO NOT** cover the fixture with any heat insulated materials.

## INSTALLATION GUIDE

### SURFACE MOUNT

1. Turn off the power.
2. Rotate the ACRYLIC LENS(11) counterclockwise to remove it.
3. Pull the SUPPLY WIRES (3) & (4) and HOUSE GROUND WIRE (2) out from the OUTLET BOX (1).
4. Make the wiring connections: connect the HOUSE GROUND WIRE (2) to the FIXTURE GROUND WIRE (6) connect the WHITE SUPPLY WIRE (3) to the WHITE FIXTURE WIRE (7); connect BLACK SUPPLY WIRE (4) to the BLACK FIXTURE WIRE (8) using WIRE CONNECTORS (5). Thread one of the FIXTURE SCREWS (10) two full turns into the threaded hole on the OUTLET BOX (1). Carefully tuck all wires back into the OUTLET BOX (1).
5. Locate the FIXTURE PAN (9) over the OUTLET BOX (1), positioning the MOUNTING SCREW (10) through the large opening of the keyhole slot and then twist to the narrow opening of the key hole slot. Put the other MOUNTING SCREW (10) through the long slot on the FIXTURE PAN (9) and thread it into the OUTLET BOX (1). Then secure the FIXTURE PAN (9) to the OUTLET BOX (1) by tightening the two MOUNTING SCREW (10).
6. Rotate the LENS (11) clockwise onto the FIXTURE PAN (9) to complete the installation.

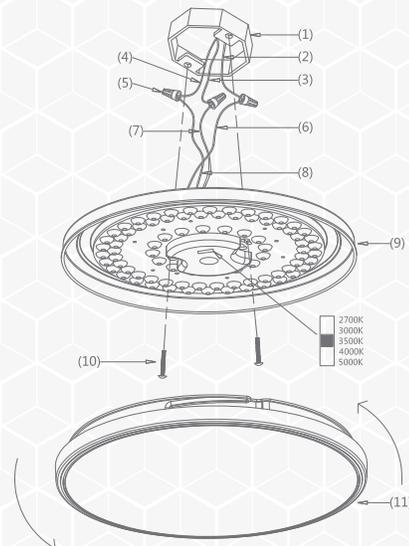

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

