

# SPECIFICATION

**NEXLEDS**<sup>®</sup>  
NEXLEDS LTD



**5 CCT**  
*Changeable*



**11" Die-Cast Flushmount**

**NX-11SMPL24W-5CCT-B**

## Specification

PRODUCT NAME :	11" Die-Cast Flusmount
MODEL NO. :	NX-11SMPL24W-5CCT-B
SPECIFICATION :	AC 120V; 50/60 Hz; 24W; 120 degree beam angle
WORKING TEMP :	(-4°F~ 122°F) -20~45°C
POWER FACTOR :	>0.9
CRI(RA) :	90
COLOR :	Black Trim
LIGHT SOURCE :	SMD2835 Chip
LUMEN :	2260 LM - 2388 LM
LIFE TIME :	≥50,000hours
PRODUCT SIZE :	D (10.98 inch) x H (0.98) inch
IP :	Suitable for damp location
APPLICATION :	Home, Shop, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMING:	Triac Dimmable
COLOR TEMP:	2700K - 3000K - 3500K - 4000K - 5000K



www.nexleds.ca



Email: sales@nexleds.ca

**NEXLEDS**<sup>®</sup>

NEXLEDS LTD

**Feature:**


- Emits evenly, without halo and shadow
- Fit 2.75 or 3.5 inch J-Box
- Support surface mount
- Die-cast trim
- compatible with most triac dimmers to give user a smooth 100%-10% dimming to choose the desired brightness.

**Die-cast trim**

Precision casting, excellent heat dissipation, high corrosion; lamp thickness only 0.98".




**Color temperature optional**  
**2700K-5000K**

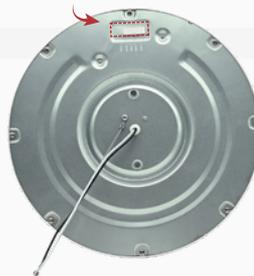

**Mounting bracket**


With multiple apertures, can be installed into any 2.75 or 3.5inch junction box.

2.75" Junction Box installation hole



3.5" Junction Box installation hole

**Dimension:**

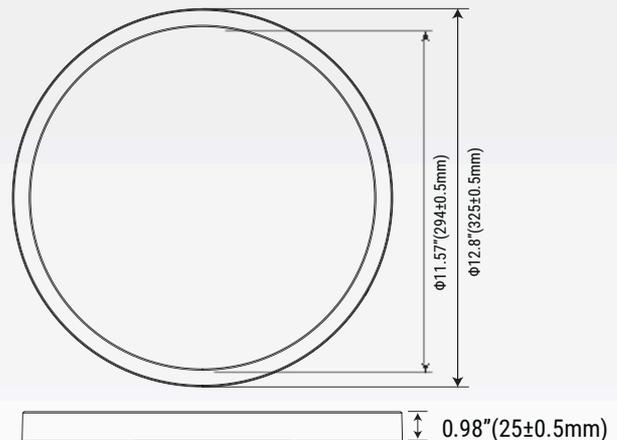

**Installation :**

**1.** Remove the bracket from the fixture by twisting in anticlockwise direction, see Fig1.



**2.** Refer to the hole position on the bracket and do the matching to J-Box. Attach them with screws, see Fig2.



**3.** Connect supply wires to wires on fixture/bracket with wire nuts. Attach white to white, black to black, and copper wire to green wire as grounding connection, select lamp color desired with the CCT switch, see Fig3.



**4.** Arrange the wires into the J-Box. Align the 2 screw points on fixture to the wider side of long holes on the bracket, twist in clockwise direction until fixing stable. Turn on the power after installation, check the fixture can work well, see Fig4.



**Warning:**

1. Read and follow all safety instructions.
2. Do not let power cords touch hot surfaces.
3. Do not install near gas or electric heaters.
4. The use of accessory equipment not recommended by manufacturer, may cause an unsafe condition, and will void the unit's warranty.
5. Do not use this equipment for other than its intended purpose.
6. Servicing of this equipment should be performed by qualified service personnel.
7. Save these instructions for future reference