

SPECIFICATION

NEXLEDS®

NEXLEDS LTD



3000K 4000K 5000K

3 CCT
Changeable

VIDEO



0°~90°
Adjustable

ADJUSTABLE LED Wall Pack Light

NX-FCWP-80W-X-DV-F

Specification

PRODUCT NAME :	LED Adjustable Wall Pack
MODEL NO. :	NX-FCWP-80W-X-DV-F
SPECIFICATION :	AC120-347V; 50/60Hz; 740mA; 80W-60W-40W
WORKING TEMP :	-40°C-45°C
POWER FACTOR :	0.9
CRI(RA) :	>70
HOUSING COLOR :	Grey
LIGHT SOURCE :	Luminus SMD 2835 Chip
LUMEN :	10400 lm
LIFE TIME :	50000 hrs
BEAM ANGLE :	100*115°
ADJUSTABLE ANGLE:	0°~90°
PRODUCT SIZE :	9.25"*8.46"*6.1" inch
IP :	IP65
APPLICATION :	Park, Warehouse, Factory and so on
WARRANTY :	5 years
STANDARD :	UL, DLC
DIMMABLE:	0-10V dimming
COLOR TEMP :	3000K-4000K-5000K Changeable



www.nexleds.ca



Email: sales@nexleds.ca

NEXLEDS®

NEXLEDS LTD


SPECIFICATION

NEXLEDS[®]


NEXLEDS LTD

Feature:

- Aesthetic, utility appearance, and patented;
- Optically designed PC cover, almost no dark macula, which makes the whole lamp emit light evenly and meets the requirements of DLC Premium 5.1;
- Adopt high light transmission and anti-UV PC lampshade;
- Low-voltage light control sensor can be installed, which is safe and reliable;
- Power and CCT selective are available to meet the different needs of customers and reduce the inventory pressure ;
- Easy and fast installation , and traditional junction box installation method is retained;
- Standard respirator extends the service life of lamps;
- IP65, completely waterproof and dustproof;
- Adjustable angle from 0-90°;
- 120-347V power supply;
- 0-10V dimming.

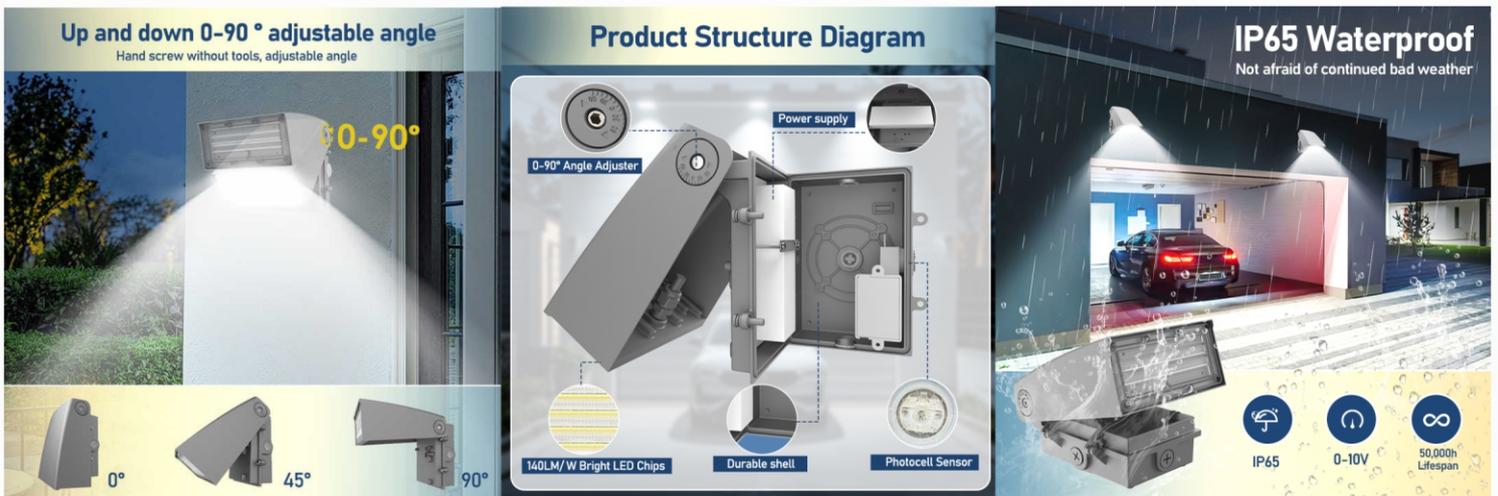

Dimension:

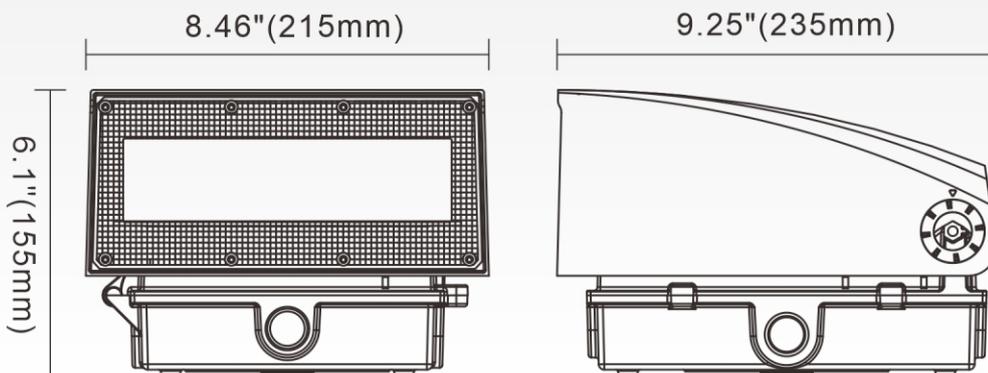

www.nexleds.ca




Email: sales@nexleds.ca


NEXLEDS[®]

NEXLEDS LTD

IES Report:

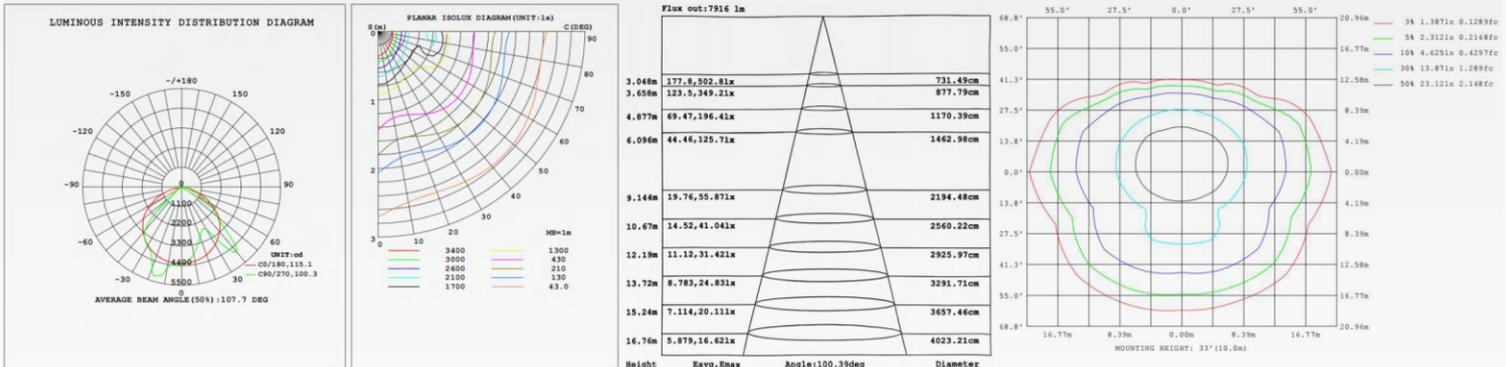

Applications:

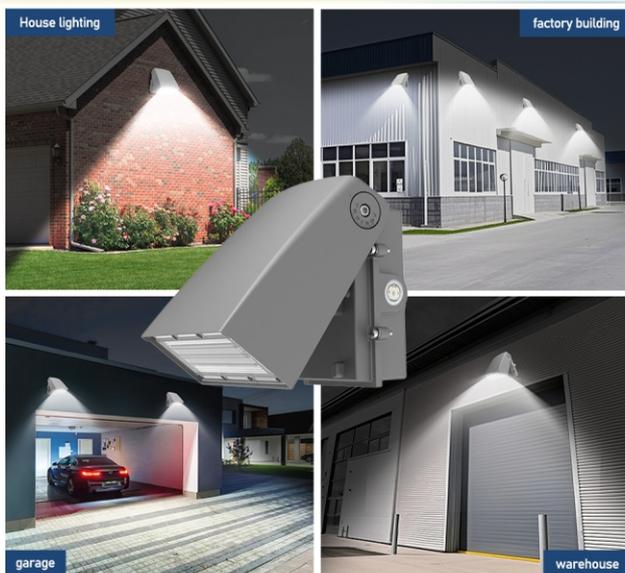

Safety Information:

- 1.Using the standard working voltage: AC120~347V,AC277-480V,50/60Hz, do not exceed.
- 2.Be sure the power supply is turned off before installation.
- 3.Switch off power of the mains supply or the connection lead respectively before doing any works.
- 4.Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
- 5.Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
- 6.Please read the specification carefully before installation.
- 7.The complete installation must be handled by an electrical expert. 80/60/40W Tunable.

