

Projet: \_\_\_\_\_ Type: \_\_\_\_\_

### Other NA NA NA

Discover our next-generation 120VAC motion sensor switch for the ultimate lighting upgrade. This PIR motion detector offers two modes: automatic occupancy detection and manual ON/OFF mode. Equipped with a segmented Fresnel lens, this sensor ensures ultra-precise detection and optimal performance, activating the lighting only when needed. Its 180° field of view provides efficient motion detection for smooth automatic control.



### CARACTERISTICS

- Manual button for ON/OFF available
- Configuration 1: Sensitivity range knob to adjust the detection range. Note that the maximum detection range is 180 degrees.
- Configuration 2: Ambient light level knob to set the desired ambient light level (Lux).
- Configuration 3: Adjust the hold time from 5 seconds to 5 minutes

### NOMENCLATURE

SERIE	VER.
ZZ	
Accessories	

### PHOTOMETRIC SPECIFICATIONS

LUMENS	0
CCT	
ANGLE	
C.R.I.	
DIMMABLE	
PHOTOCELL	
SENSOR	
LUMEN MAINTENANCE L70	
LED TYPE	
LED QTY	
LED VOLTAGE	
LED MAX CURRENT	
FLICKER	

### MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	
HOUSING FINISH	
LENS MATERIAL	
LENS FINISH	
WEIGHT	0.00 KG
OPERATING TEMP.	
APPLICATION	
INSTALLATION	
CABLE LENGTH	N/A

### ELECTRICAL SPECIFICATIONS

REAL POWER	W
VOLTAGE	
EFFICIENCY	lm/w
POWER FACTOR	%
T.H.D	
FREQUENCY	

### CERTIFICATIONS

REGULATORY LISTING	
EFFICIENCY LISTING	
DLC ID	
FCC	
BARCODE	882110007731
ENVIRONMENTAL	
IK PROTECTION	
SURGE PROTECTION WITH GROUNDING	
SURGE PROTECTION WITHOUT GROUNDING	



**DIMENSIONS**



**PACKAGING**

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
N/A	N/A	N/A	0.00 kg 0.00 lbs	NO PHOTO

**PRODUCTS IMAGES**

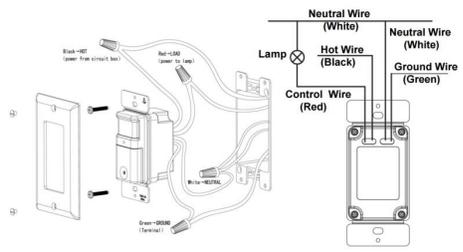

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7