


CCT & Wattage Selectable

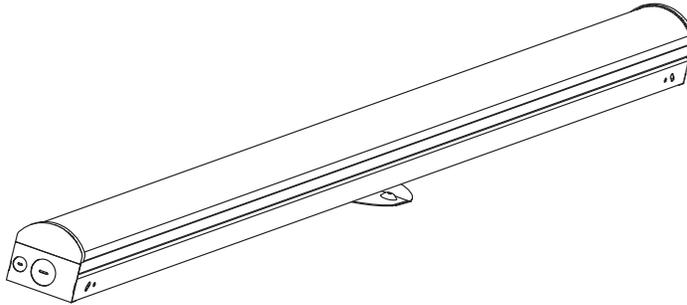

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product. Failure to do so could lead to electric shock, fire or other injuries that could be hazardous or even fatal.

- Be sure the electricity to the wires you are working on is shut off. Either remove the fuse or turn off the circuit breaker.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This product must be installed in accordance with local, state and national electrical codes.
- Installation work shall be completed by a licensed installer that is familiar with the construction and operations of the product.

CAUTION:

- This product contains 1-10v low-voltage DC dimming lines, connect the purple and pink wires only to a suitable low voltage dimming system. Connecting these dimming leads to AC line voltage will damage the driver and cause the unit to fail.

SAFETY INFORMATION

NOTICE

This device complies with Part 15 of the FCC Rules. (1) This device may not cause harmful interference received, including interference that may cause. This equipment has been tested and found to comply in accordance with part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used properly, may cause harmful interference to radio or television reception. You are encouraged to try to correct the problem by turning the equipment off and on. The user is encouraged to take the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit that is not shared with other loads.
- Consult the dealer or an experienced radio/television technician for help.

INSTALLATION INSTRUCTIONS

1. Squeeze at the end of the housing, and unhinge the LED tray, then take out LED tray out of the housing together with LED cover.

2. Configure the fixture power (light output) and color temperature settings, by using the slide switches on the Driver. (please note that there are two drivers in housing, make sure both driver's setting is completely same.)

Installation Instruction

LED Premium Commercial Strip

Applicable models:
SEL-PS

Installation Instruction

LED Premium Commercial Strip

INSTALLATION INSTRUCTIONS

3. **DRYWALL MOUNTING:** If the mounting holes go through drywall without a stud, drill two small pilot holes using a 3/16-in. drill bit (not included), and install drywall anchors (AA) into the holes with a hammer (not included).

CEILING STUD MOUNTING: If the mounting holes go through ceiling studs, drill four small pilot holes using a 5/32-in. drill bit (not included) for the wood screws (BB).

NOTE: Install Wood screws (BB) but leave about 1/2-in. of space between the screw head and mounting surface.

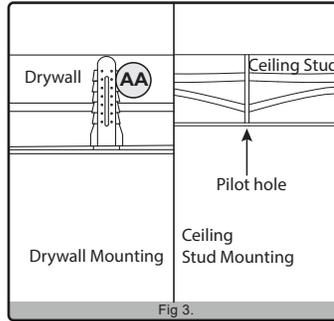


Fig 3.

4. Feed the supply wires from the mounting surface through the knockout hole on the housing base (B). Guide the heads of the two wood screws into the keyhole slots and slide the housing base (B) in the direction such that the wood screw heads rest over the narrow part of the keyhole slot. Ensure that the fixture is supported and tighten the two wood screws (DD) until the fixture is secured to the mounting surface.

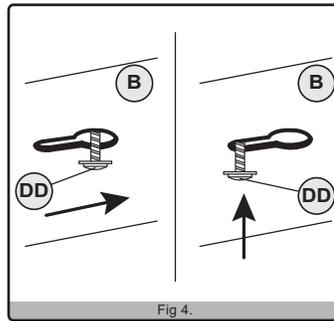


Fig 4.

5. Connect the fixture wires to the supply wires -- black to black, white to white, and green to copper/bare.

WARNING: If there is no ground supply wire, stop installation and consult a qualified electrician.

NOTE: If 0-10v dimming system is available, connect the purple and gray wires to the corresponding purple and gray wires in the building dimming system. Once wire connections are made, secure each with a wire nut (CC).

To adjust the light, you need to cut the terminal and connect it after stripping the cable.

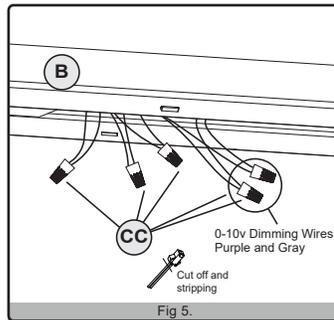


Fig 5.

INSTALLATION INSTRUCTIONS

6. Securely mount the Housing directly to a surface using the correct mounting hardware through the Drill Locations, (2places minimum). The J-Box Adapter is used to cover the J-Box (by others).

MAINTENANCE AND CARE

Clean with a mild, non-abrasive glass cleaner containing abrasive agents. When cleaning the spray should be applied to the cleaning cloth.

TROUBLESHOOTING

Problem	Possible Causes
Fixture does not light.	1. Power is off. 2. Incorrect wiring. 3. Defective fixture.
Circuit breaker trips when light is turned on.	Crossed wires or ground wire is grounded.

WARRANTY

This fixture is warranted to perform free from defects in material and workmanship. Return it with proof of purchase to the vendor.