

SPECIFICATION

NEXLEDS[®]
NEXLEDS LTD

3 CCT
Changeable

3000K 4000K 5000K



VIDEO



Cylinder Downlight (Suspended)

NX-5P95-8W-5CCT-ACK


Specification

PRODUCT NAME :	LED Mini Wall Pack
MODEL NO. :	NX-OWPMD-30W-X-DV-F
SPECIFICATION :	AC120-347V; 50/60Hz; 2800mA; 30W-25W-18W Selectable
WORKING TEMP :	-40°C~45°C
POWER FACTOR :	0.95
CRI(RA) :	>70
HOUSING COLOR :	Dark brown
LIGHT SOURCE :	Luminus SMD 2835 Chip
LUMEN :	3600 lm
LIFE TIME :	50000 hrs
BEAM ANGLE :	110*150
PRODUCT SIZE :	8.39*5.75*2.8 inch
IP :	IP65
APPLICATION :	Park, Warehouse, Factory ...etc
WARRANTY :	5 years
STANDARD :	UL, DLC
DIMMABLE:	0-10V dimming
COLOR TEMP :	3000K-4000K-5000K Changeable



Feature:

- High luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC 120-347V.
- Die-cast aluminum cooling design, high quality and better cooling for LED Tj < 85°C.
- Excellent optics design, greatly improve the light utilization and evenness .
- Motion sensor control available (Optional)

Dimension:

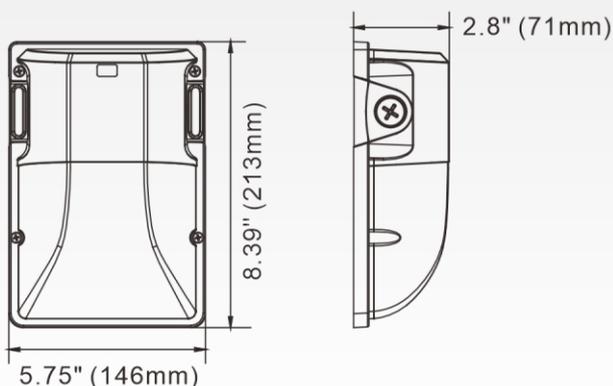


IES Report:

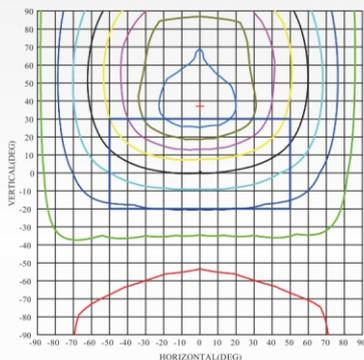

Flux unit: 1577 lm

Height	Beam Diameter	Flux
1m	154.2, 654.2lx	360.80lm
2m	38.85, 165.6lx	721.60lm
3m	17.13, 72.69lx	1082.40lm
4m	9.638, 40.89lx	1443.20lm
5m	6.106, 28.17lx	1804.00lm
6m	4.283, 18.17lx	2164.80lm
7m	3.147, 13.38lx	2525.60lm
8m	2.409, 10.22lx	2886.40lm
9m	1.904, 8.077lx	3247.20lm
10m	1.542, 6.542lx	3608.00lm

Note: The Curves indicate the illuminance and the average illumination when the luminaire is at different distance.

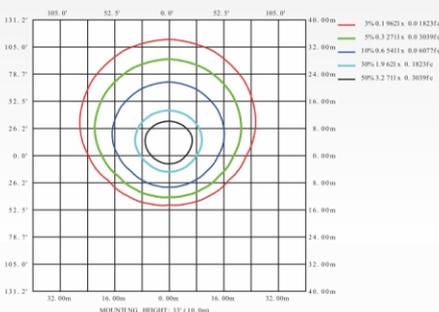

Applications:

