

LED Exit Signs

MODEL OE-126





HIGHLIGHTS

- LED Pictogram Exit Sign with 120 minutes backup time
- LED Exit Signs with innovative, snap-together design, which allow for fast and easy installation
- Injection-molded thermoplastic ABS housing with Universal mounting (wall, side and ceiling)
- Has UL-94V-0 flame rating and is fire-retardant
- Includes Test button and charge indicator light
- Provides Overcharge & over-discharge protection
- As per CSA recommendations, batteries should be replaced every 4 years
- Case Quantities: 6

SPECIFICATIONS

Model	OE-126
Wattage	4.5W
Voltage	120V AC or 347V AC /60Hz
Material	Injection molded thermoplastic ABS housing
Battery	3.6V 900mAh
Emergency Duration Time	≥ 120 min
Conversion Time	< 0.2 seconds
Grade of Protection	IP 20
Insulation	II, Range: 80m²
Operating Temp.	-20°C ~ +40°C
Warranty	5 years

DIMENSIONS

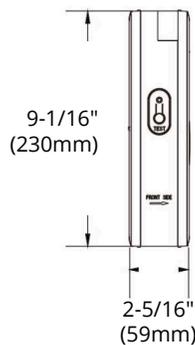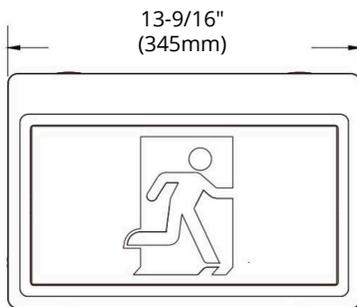

* Included in packaging



* Optional Accessory:
OE-UPDOWN-316+126 and OE-L+R-316+126

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: