

## LED STRIP LIGHTS

### OL-ST8-3CCT+W

## HIGHLIGHTS

### 96" LED Strip Light Power and CCT adjusted

- Daisy connection of up to 15 units per single power source running 347v
- Suspending installation and surface-mounted installation
- Diffused light, Damp location rated, Polycarbonate lens
- Motion sensor compatible (sold separately)
- 5 year warranty



## DIMENSIONS



Model	L×W×H (mm/inch)
OL-ST8-3CCT+W	2438x75x83(mm) / 95.98"x2.95"x3.26"

## SPECIFICATIONS

Model	OL-ST8-3CCT+W
Wattage	60W   70W   80W
Voltage	AC120-347V
Lumens	7800 lmn   9100 lmn   10400 lmn
Beam Angle   CRI	120°   80
Lifetime	50000 hours
Dimmable	Yes(only 0-10v dimming available)
Warranty	5 years
Grade of Protection	IP20
Luminous Efficiency	130LM/W
Colour Temp.	3500K / 4000K / 5000K
Application	School / Hospital / Super market / Office / Warehouse
Operating Temp.	-20°C ~ +40°C
Case Quantities	4

## ACCESSORIES



OL-ST8-LINK-KIT



OL-ST8-SUS-KIT  
(aircraft cable length: 4.92ft.)


## DAISY CONNECTION

- 120V = 6 units
- 277V = 12 units
- 347V = 15 units


## LED STRIP LIGHTS

OL-ST8-3CCT+W

## TESTING REPORT

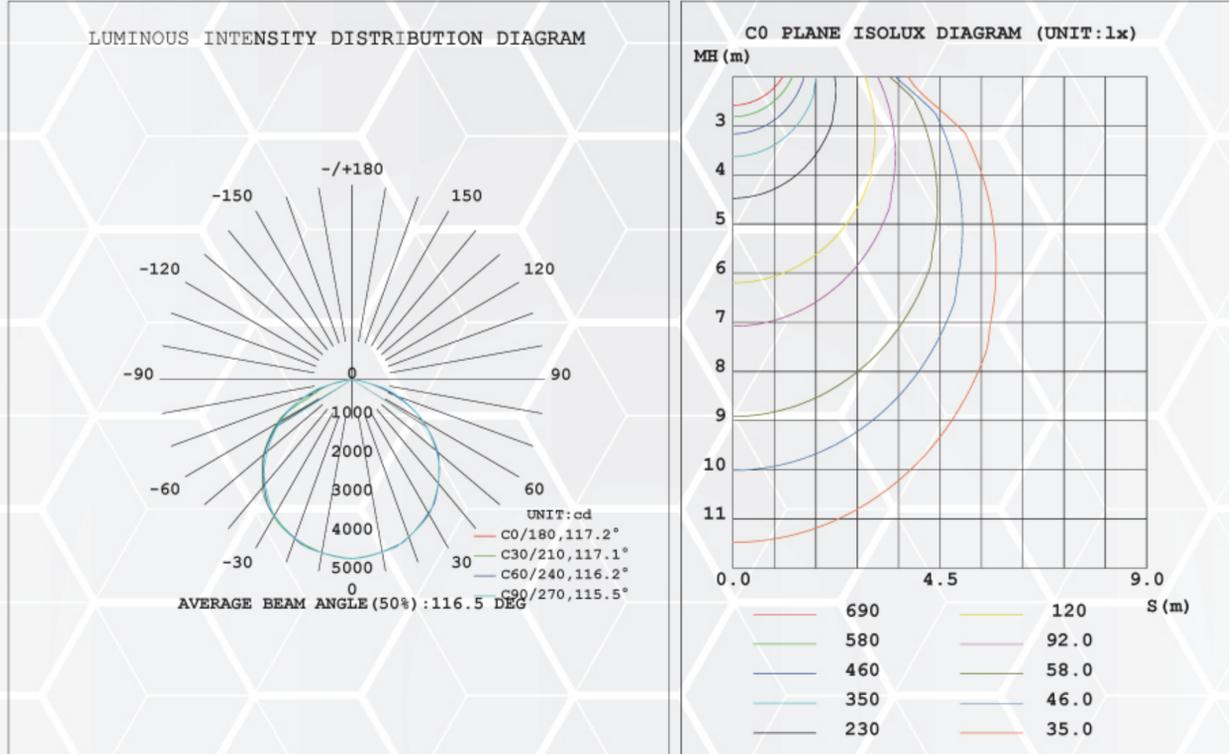

## APPLICATIONS

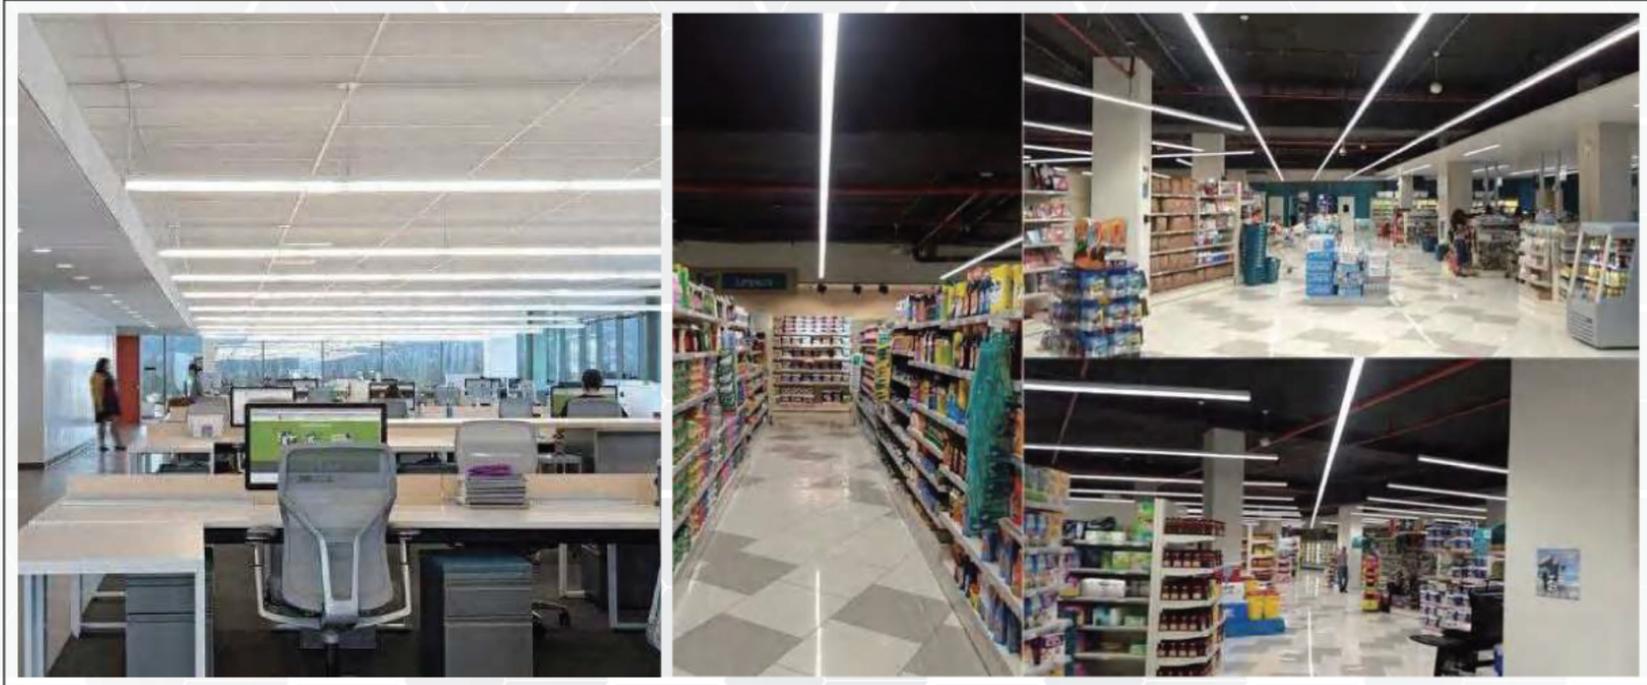

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.