

Pole Top Area Light

75W | Colour Selectable | 120-347V



Elegant look and design
Ideal for parking lots, pathways, parks, retail settings, and more

Colour Selectable
3000K / 4000K / 5000K

Complete with
Photocell Receptacle
and Shorting Cap
Photocells sold separately

0-10V Dimmable

High Efficiency Optics
with type 5 distribution

Polyester
Powder-Coat Finish
(Bronze)

Fits Up To 2³/₄" OD pole

Instant Start



Optional Accessories (sold separately)
120-347V Photocell (JL-207E), 120-277V Photocell (JL-205LV)



JL-207E



JL-205LV

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	9,218 lm @ 3000K
Efficacy	120 lm/W
CCT	3000K / 4000K / 5000K
CRI	>80
Dimmable	0-10V
Beam Angle	90°
Distribution	Type V
L70 Life	>50,000 hours
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLGDOIKVU5WA

ISOCANDELA PLOT

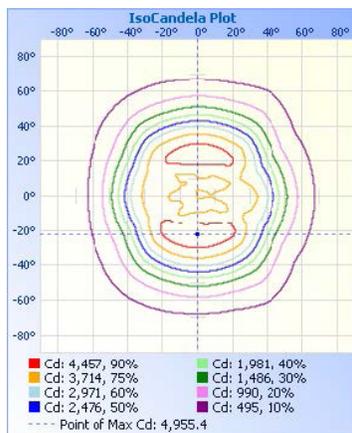

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	13.0 fc	31.7 ft	24.0 ft
34.0ft	3.25 fc	63.4 ft	47.9 ft
51.0ft	1.44 fc	95.1 ft	71.9 ft
68.0ft	0.81 fc	126.8 ft	95.8 ft
85.0ft	0.52 fc	158.5 ft	119.8 ft
102.0ft	0.36 fc	190.2 ft	143.8 ft

■ Vert. Spread: 86.0°
■ Horiz. Spread: 70.3°

ELECTRICAL

Wattage	75W
Voltage	120-347V
Power Factor	>0.9
Surge Protection	4kV
Auxiliary Output	12V
THD	<20%
Operating temp	-40 to 45°C


CONSTRUCTION

Power Cord	23"
Housing	Aluminum
Finish	Powder coated
Colour	Bronze
Lens	Polycarbonate
IP Rating	IP65
Weight	14.33 lbs
Carton qty	1

ACCESSORIES (SOLD SEPARATELY)

120-347V Photocell	JL-207E
120-277V Photocell	JL-205LV

DIMENSIONS

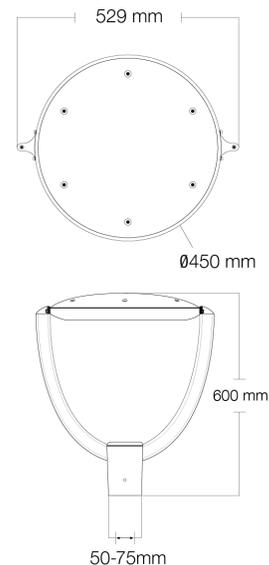

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833