

Projet:

Type:

Street Light 50W 100-277V 3000K

### CARACTERISTICS

- -
- -
- -
- -



### NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
SE	2M	C	G	D	3	050	0	D	HD
Street light	type2M	clear	grey	100-277V	3000K	50W	N/A	dim 0-10V	HD

### PHOTOMETRIC SPECIFICATIONS

LUMENS	6,500
CCT	3000K
ANGLE	T2-M
C.R.I.	70
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 3030
LED QTY	96
LED VOLTAGE	48V
LED MAX CURRENT	938mA
FLICKER	Flicker-Free

### MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Grey
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	3.20 KG
OPERATING TEMP.	-30°C ~ 45°C
APPLICATION	Outdoor

### ELECTRICAL SPECIFICATIONS


REAL POWER	50 W
VOLTAGE	100-277V
EFFICIENCY	130 lm/w
POWER FACTOR	95 %
T.H.D	10 %
FREQUENCY	50/60Hz

### CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	No
BARCODE	0
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	10KV
SURGE PROTECTION WITHOUT GROUNDING	10KV

<b>INSTALLATION</b>	Wall & Poll Mount
<b>CABLE LENGTH</b>	N/A

**DIMENSIONS**

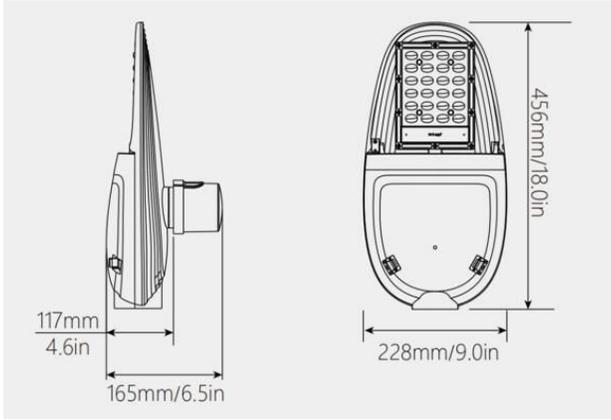

**PACKAGING**

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
50.00 cm X 25.00 cm X 17.00 cm 19 5/8" X 9 7/8" X 6 3/4"	N/A	N/A	4.20 kg 9.26 lbs	72 

**PRODUCTS IMAGES**



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7