



ALL-IN-ONE DESIGN WITH SOLAR PANEL, LIGHT ENGINE, AND BATTERY BUILT INTO THE FIXTURE. The battery can support 2-3 nights, even with cloudy days. No need for a power source, which eliminates the need for trenching and wiring.

- Perfect for pathways, waterfronts, parks, schools and more
- Comparable to 30W Halogen bollard
- Efficient operation gives 12 hours of 100% brightness with one charge
- Aluminum housing can withstand harsh outdoor elements
- Advanced new LiFePO4 battery lasts at least 2000 charge cycles and is replaceable



BATTERY CHARGE TIME



BATTERY LIFE



BATTERY CHARGING TEMP



-13°F TO 140°F

OPERATING TEMP



REPLACEABLE BATTERY



BEAM ANGLE



100,000hrs RATED LIFE

PART #	UPC	COMPARES TO	LUMENS	CCT	DIMENSIONS	LISTINGS
SL-SBL-2W-27K-BK-G1	844006062477	30W HALOGEN	266	2700K	8.0" x 30.0"	CE FC
SL-SBL-2W-40K-BK-G1	844006090036			4000K		

OPERATING MODE

 DUSK TO DAWN



Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com

PHOTOMETRICS

FOOT CANDLES	ISO-LINE COLOR
1 FC	BLACK 
0.5 FC	MAGENTA 
0.1 FC	BLUE 

ILLUMINANCE (FC)

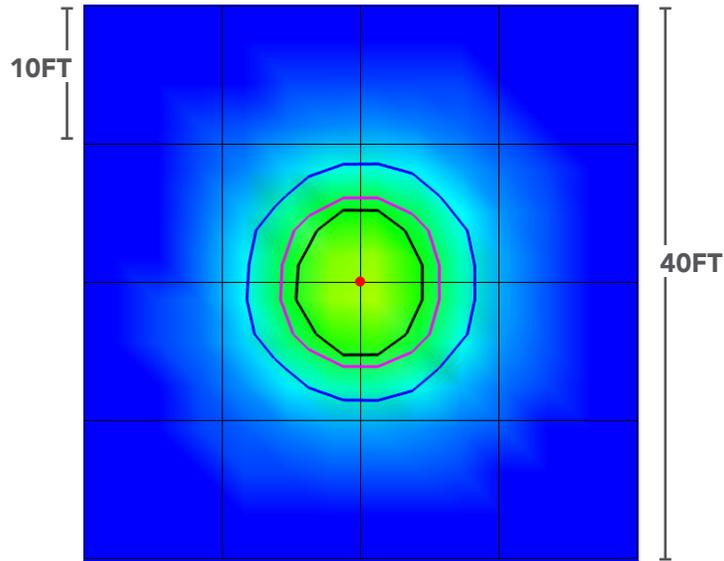

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com