

## 2" SLIM LIGHTS

### SLIM-TL2-5CCT



#### HIGHLIGHTS

#### 2" Round Trimless LED Downlight With Selectable CCT

- Durable airtight aluminum body
- Type IC, Air-Tight - No Housing Required
- Flangeless installation provides a more high end look
- Fast Installation & No Junction Box Needed
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase /reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours



#### CERTIFICATIONS



#### COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




#### SPECIFICATIONS

MODEL	SLIM-TL2-5CCT
Wattage	8W
Voltage	120V AC, 60Hz
Lumens	600 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	80Ra+
Rating	IC rated/Indoor use/ Damp Location
Grade of Protection	IP44
Cutout	Ø2-3/5" (67mm)
Operating Temperature	-20°C ~ +40°C
Case Quantities	18

# ELEVATE YOUR LIGHTING GAME

**5 YEAR WARRANTY**


#### DIMENSIONS

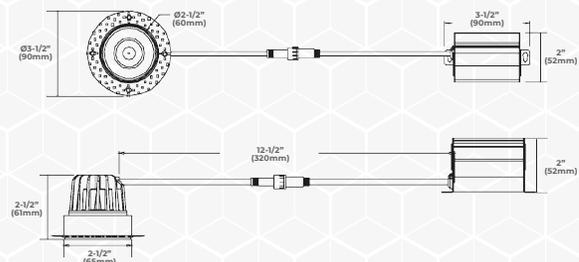

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

## 2" SLIM LIGHTS SLIM-TL2-5CCT

### MOUNTING

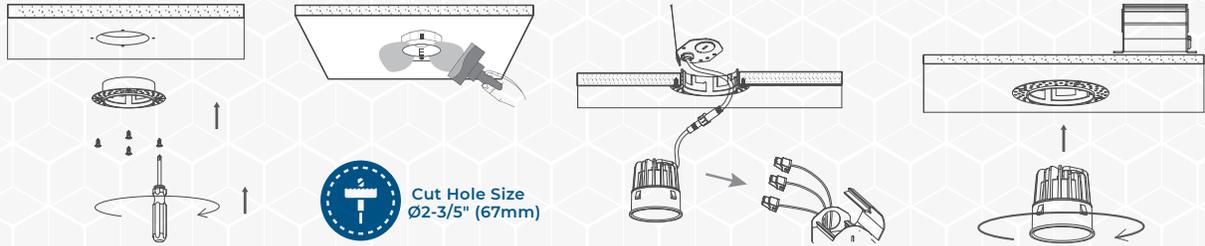

### INCLUDED IN BOX

- 2" Round LED Trimless Downlight with Remote Driver
- 4 Screws



### TRIM FINISH OPTIONS



### ACCESSORIES (SOLD SEPARATELY)



CORD-24 | 60 | 120 | 240  
Extension Cord



DMD-ELV  
Single pole 3 way dimmer



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			<b>Project:</b>
			<b>Location:</b>
			<b>Architect:</b>
			<b>Engineer:</b>
			<b>Contractor:</b>
			<b>Submitted By:</b>
			<b>Date:</b>

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.