

4" SLIM LIGHTS SLIM4DR-5CCT



HIGHLIGHTS

4" Deep Regress Slim Panel Light With Selectable CCT

- Edge-lit Technology, No Glare Or Dark Spots, Instant-on
- No Existing Recessed Housing Or Junction Box Required
- Dimming: Triac Down To 10%
- I.C. Rated For Direct Contact With Insulation
- Easy-access CCT Switch and Frosted Lens



CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	SLIM4DR-5CCT
Wattage	12W
Voltage	120V AC, 60Hz
Lumens	750 lmn
Beam Angle	100°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	80
Rating	IC rated/Indoor use/ Damp Location
Grade of Protection	IP44
Cutout	Ø4-1/8" (105mm)
Operating Temperature	-20°C ~ +40°C
Case Quantities	18

ELEVATE YOUR LIGHTING GAME


5 YEAR WARRANTY

DIMENSIONS

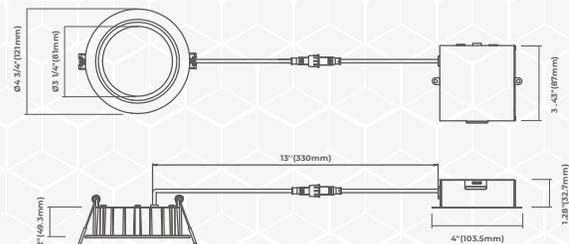

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

4" SLIM LIGHTS SLIM4DR-5CCT

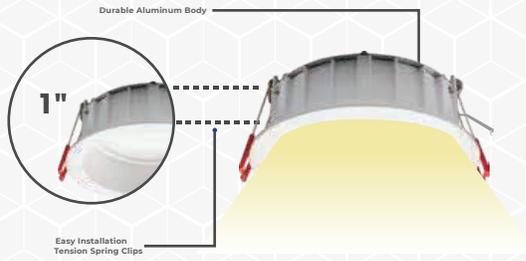

CUT HOLE SIZE



Cut Hole Size
Ø4-1/8" (108mm)

TRIMS (SOLD SEPARATELY)



RINGS (SOLD SEPARATELY)





REFLECTORS (SOLD SEPARATELY)



ACCESSORIES (SOLD SEPARATELY)



TESTING REPORT

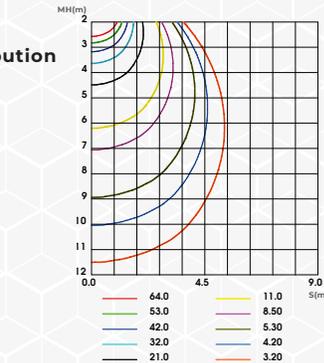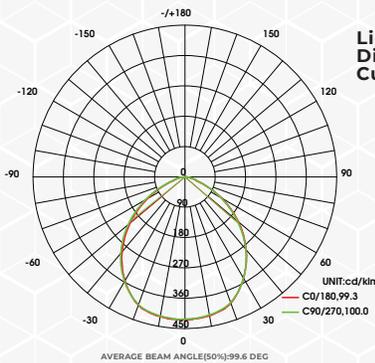

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.