

LINEAR STRIP LIGHTS SLST4-5CCT+W



HIGHLIGHTS

48" LED Linear Strip Light With Selectable CCT And Wattage

- Daisy connection of up to 20 units per single power source running 347v
- Suspending installation and surface-mounted installation
- Diffused light, Damp location rated, Polycarbonate lens
- **WMS** has built in motion sensor
- 5 year warranty



CERTIFICATIONS



COLOUR TEMPERATURE

3000K / 3500K / 4000K / 5000K / 6000K (Selectable)



SPECIFICATIONS

MODEL	SLST4-5CCT+W
Wattage	40W/50W/60W
Voltage	120-347V AC, 60Hz
Lumens	5200 lmn/6500 lmn/7800 lmn
Beam Angle	120°
Lifetime	50,000 hours
Dimmable	Yes (0-10v dimming)
CRI	80
Application	School/Hospital/Super Market/ Office/Warehouse
Grade of Protection	IP20
Luminous Efficiency	130 LM/W
Power Factor	0.9
Operating Temperature	-20°C ~ +40°C
Case Quantities	8

LONG, LEAN AND LUMINOUS


5 YEAR WARRANTY

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




LINEAR STRIP LIGHTS SLST4-5CCT+W

DIMENSIONS

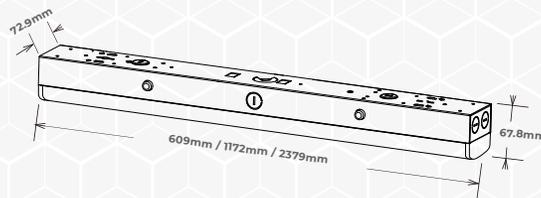


TESTING REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

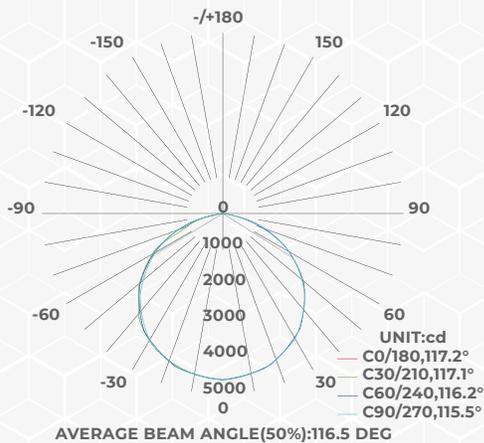

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

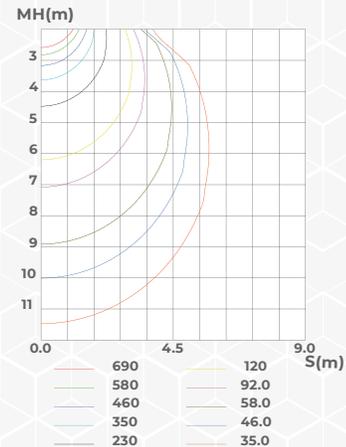

ACCESSORIES



DAISY CONNECTION

120V = 8 units
277V = 16 units
247V = 20 units

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.