

Projet: Type: Qté:

**Slim Panel Multi-CCT 9W 100-277V 2700-3000-3500-4000-5000K**

Easy to install, the SpecLite slim panel features a color selection option via a dip switch, allowing you to choose from 2700K à 5000K. Powered by 120V (AC), this recessed LED panel is available in three finishes (White, Black, and Brushed Nickel) and in two sizes (4" and 6"). Ideal for simplifying your residential lighting projects, this slim recessed LED panel offers an aesthetic and functional solution for any room, ensuring a lighting ambiance tailored to your client's needs.



**CARACTERISTICS**

- Integrated Multi-CCT selection: Easily adjust the color temperature to achieve lighting from 2700K to 5000K according to your needs.
- Slim and minimalist design: Sleek profile designed to blend seamlessly into all types of spaces without compromising performance.
- TRIAC Dimming: Compatible with most residential dimmers.
- Soft and even lighting: Provides diffuse light, reducing glare and enhancing visual comfort.



**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
SP	4D	F	N	D	C	009	0	D	QK
Slim Panel	4"	frost	nickel	100-277V	2700-3000-3500-4000-5000K	9W	N/A	dim TRIAC	QK

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	730
CCT	2700K/3000K/3500K/4000K/5000K
ANGLE	120°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	54
LED VOLTAGE	50V-60V
LED MAX CURRENT	277mA
FLICKER	Not Flicker-Free

**ELECTRICAL SPECIFICATIONS**

REAL POWER	9 W
VOLTAGE	100-277V
EFFICIENCY	81.11 lm/w
POWER FACTOR	90 %
T.H.D	10 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cETL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	Yes
BARCODE	882110008684
ENVIRONMENTAL	IP44
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	N/A
SURGE PROTECTION WITHOUT GROUNDING	N/A

**MECHANICAL SPECIFICATIONS**


HOUSING MATERIAL	Aluminium
HOUSING FINISH	Brushed Nickel
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	0.35 KG
OPERATING TEMP.	-10°C ~ 40°C
APPLICATION	Indoor
INSTALLATION	Recessed

CABLE LENGTH

N/A

---

## DIMENSIONS

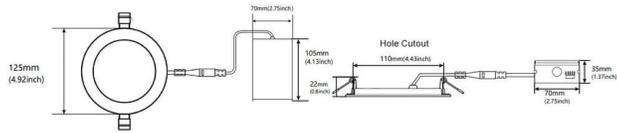

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
13.00 cm X 13.00 cm X 6.50 cm	41.00 cm X 34.50 cm X 28.00 cm	30	11.50 kg	900 
5 1/8 " X 5 1/8 " X 2 1/2 "	16 1/8 " X 13 5/8 " X 11 "		25.35 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7