


T-Bar Integrated Luminaire

20W | 3500K | 4ft

Ideal for office buildings, medical, health and educational buildings, hotels, airports and more. Create your own custom look.

Replaces Standard T-BAR Cross Tees.

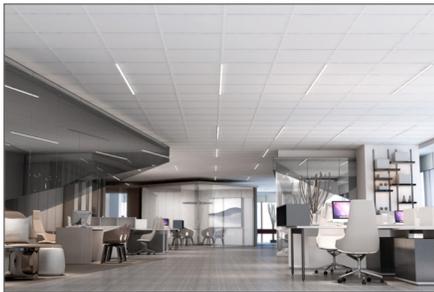

Slim Profile

0.48" thickness

15/16"

Seamless Integration

into suspended ceilings allows unique and elegant architectural lighting designs



Frosted Lens and 6 ft Power Cable with RJ45 Jack

NOTE: The cable is CM rated

1 power supply (TBAR-PS-60W) required for 3 pieces of T-Bar.
Optional 9/16" Clear Diffuser and Lens Diffuser available (sold separately).



Power Supply
TBAR-PS-60W

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	2,600 lm
Efficacy	130 lm/W
CCT	3500K
CRI	80
Beam angle	120°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E491106
-----	---------

ISOCANDELA PLOT

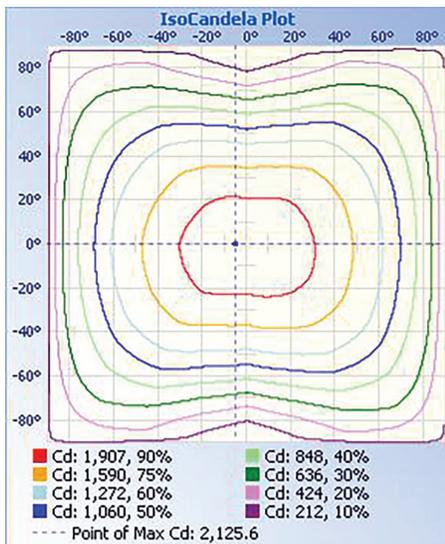

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3R	194 fc	9.1 ft	17.5 ft
6.7R	47.2 fc	18.6 ft	35.6 ft
10.0R	21.2 fc	27.7 ft	53.1 ft
13.3R	12.0 fc	36.9 ft	70.6 ft
16.7R	7.59 fc	46.3 ft	88.6 ft
20.0R	5.29 fc	55.4 ft	106.1 ft

■ Vert. Spread: 108.4°
■ Horiz. Spread: 138.7°

ELECTRICAL

Wattage	20W
Voltage	120-277V
Power factor	0.9
THD	9%

CONSTRUCTION

Housing	Aluminum
Finish	Silver
Unit gross weight	2.53 lbs
Carton weight	20.7 kg
Carton dimensions	125 x 54 x 19.5 cm

ACCESSORIES (Ordered Separately)

Power Supply	TBAR-PS-60W
--------------	-------------

DIMENSIONS

