



GET YOUR PRODUCTS FAST
Arani is committed to same day shipping on orders before 3pm*.

Date:

Project:

Prepared for:

Type:

Comments:



LINEAR UP & DOWN LIGHT

25% UP | 75% DOWN



5 Years



Lifetime
50 000 hours



Suitable for use in dry locations



0-10V Dimmable



Linear Up & Down Light
SU-UD4-40W-xxK-S-V1

SPECIFICATIONS

- 25% Up Light, 75% Down Light
- Interconnected Installation Possible
- Robust Aluminium Casing
- Exceptionally Slim Profile
- Beam Angle: 120°
- Color Rendering Index: >83
- Input Voltage: 110-260Vac
- Operating Temperature: 0°C to 40°C

AVAILABILITY

- 40W
- 3000K / 4000K
- 110-260Vac




*This icon indicates a STOCK item: Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship out on the same day (orders must be placed before 3pm)



Full ies File Available on Request

SUPPORTED INSTALLATION METHODS

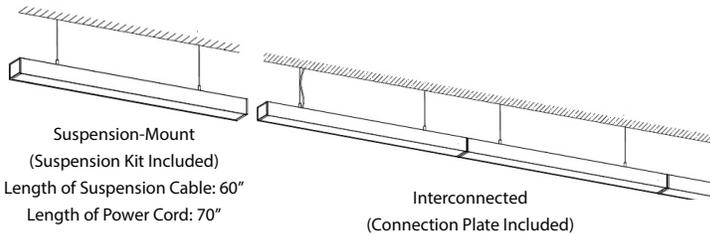

Suspension-Mount
(Suspension Kit Included)
Length of Suspension Cable: 60"
Length of Power Cord: 70"

Interconnected
(Connection Plate Included)

ORDERING INFORMATION

SERIES	LENGTH	POWER (WATTS)	EQUIVALENT TO (WATTS)	LUMENS	COLOR TEMP	MODEL NUMBER
LINEAR UP & DOWN LIGHT V2	4Ft	40W	150	3412Lm	3000K	SU-UD4-40W-30K-S-V1
					4000K	SU-UD4-40W-40K-S-V1