

LED VAPOUR TIGHTS

VT-40W-3CCT+W

HIGHLIGHTS

LED Vapour Tight Suitable For Wet Locations, With Selectable CCT & Wattage

- Slotted iron Board, excellent heat dissipation
- Modular installation, save labor cost
- Suitable for all commercial needs
- IP Rating 66 - rated for wet location
- Corrosion Resistant
- 5 year warranty



WATTAGE SELECTABLE



DIMENSIONS



Model	LxWxH (mm/inch)
VT-40W-3CCT+W	1200*95*83/47.92*3.74*3.26


SPECIFICATIONS

Model	VT-40W-3CCT+W
Wattage	30W 40W 50W
Voltage	AC100-347V
Lumens	3900lm 5200lm 6500lm
Beam Angle	120°
Lifetime	50000 hours
Dimmable	Yes(only 0-10v dimming available)
Warranty	5 years
Grade of Protection	IP66
Luminous Efficiency	130LM/W
Colour Temp.	3500K / 4000K / 5000K
Location	Wet Locations
Operating Temp.	-20°C ~ +40°C
Case Quantities	8

LED VAPOUR TIGHTS

VT-40W-3CCT+W

TESTING REPORT

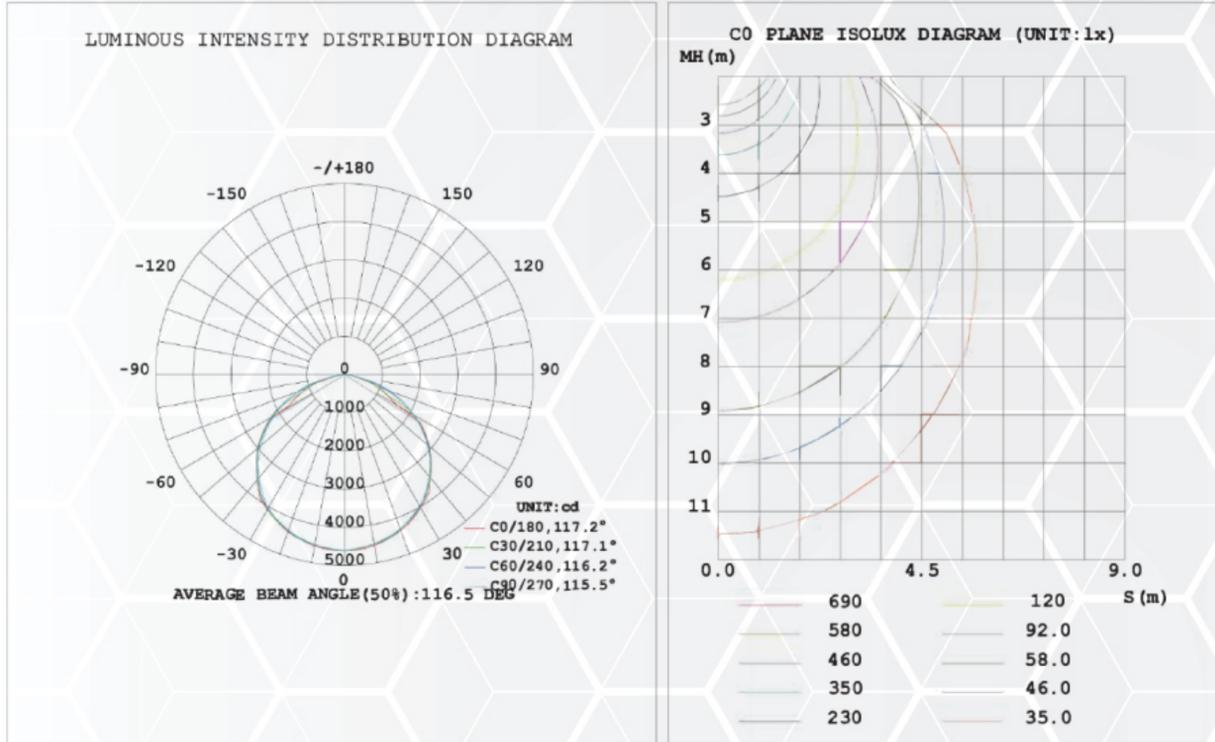

ACCESSORIES



VT-SUS-KIT
(aircraft cable length: 4.2ft.)

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.