

LED Vapour Tights

MODEL VT-W60-3CCT+W | VT-W60MS-3CCT+W



WARNING

WARNING — THE INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

1. LED Vapour Tight can only be installed by a qualified electrician
2. Before installation or maintenance, please disconnect the power to prevent electric shock
3. Any non-professionals are not allowed to disassemble the lamp




APPLICATION NOTICE

- DO NOT cover the fixtures with flammable materials
- Lamps should always be installed or replaced with care
- Misuse of, or changes to the fixture shall nullify the guarantee
- Before installing the lighting fixtures, please read this instruction manual carefully
- When a lamp is to be cleaned, make the power off and let it cool down completely. Clean the fixture with a soft cloth and a standard PH neutral detergent
- Check the local voltage in accordance with the product requirements before using the product. Exclusively replaced by the manufacturer or his service agent or the similar qualified person in order to avoid a hazard
- The lighting fixtures should be installed, connected and tested by a certified installer based on the local regulations
- Re-lamping only can be done when the power is off and the lamp is completely cooled down


CAUTION

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES. Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician. Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

WIRING DIAGRAM AND MICROWAVE SENSOR INSTALLATION

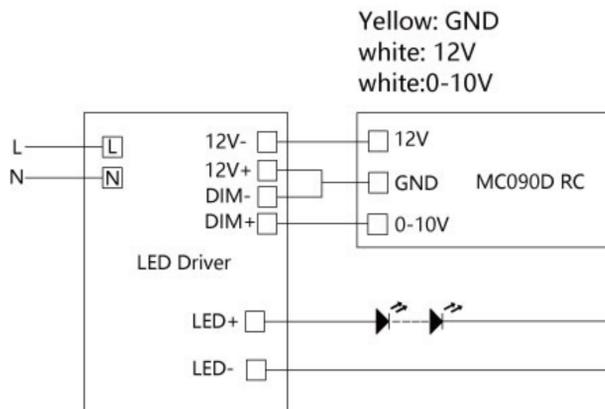


In order to avoid mutual interference during the operation of motion sensor, the installation distance between lamp and lamp shall not be less than one meter.

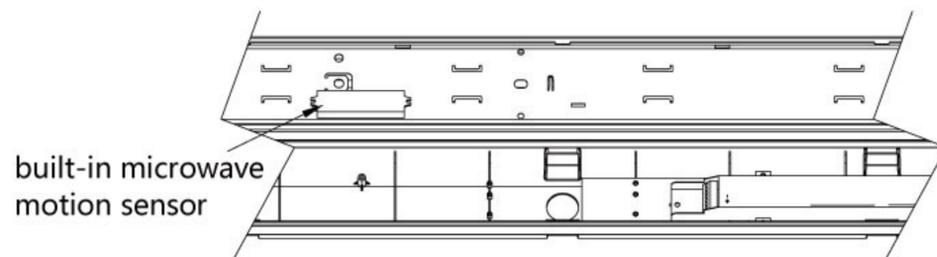


INSTALLATION GUIDE




1. Confirm the mounting method of waterproof connector.

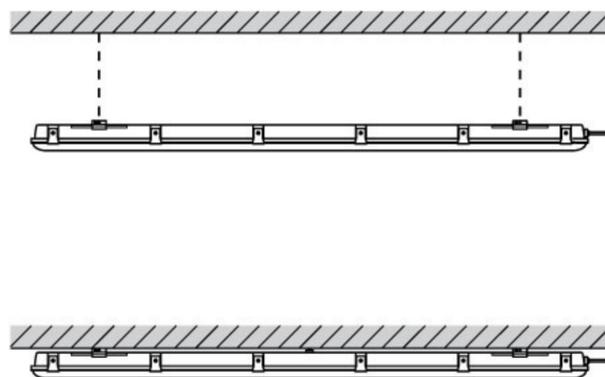



2. Release the lock clips to open fixture cover.

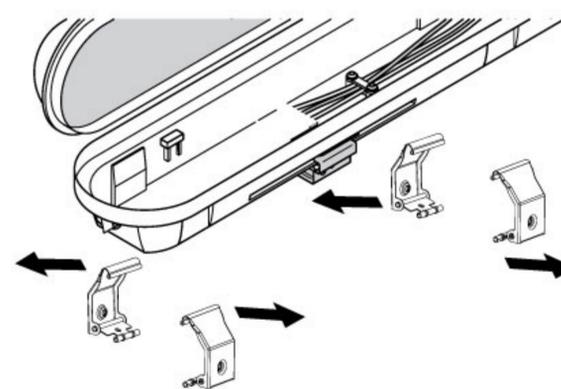

INSTALLATION GUIDE

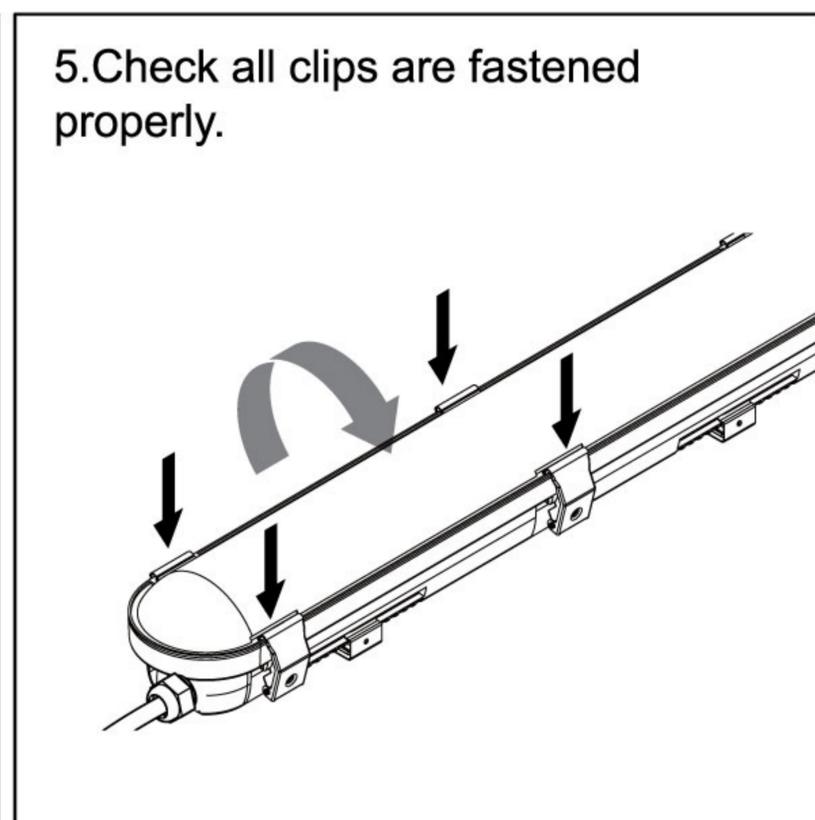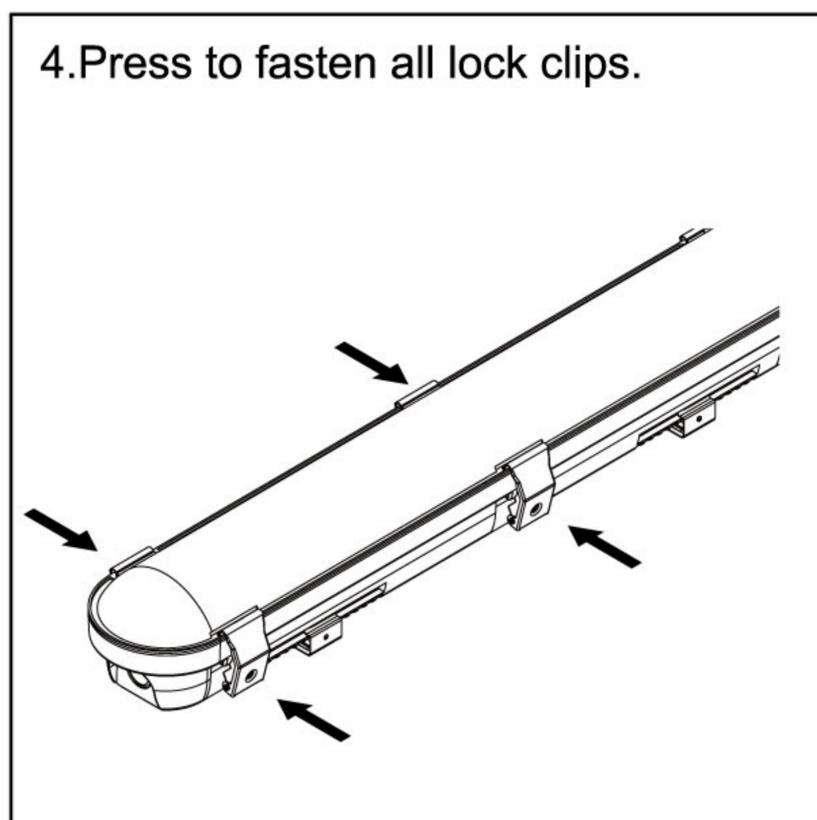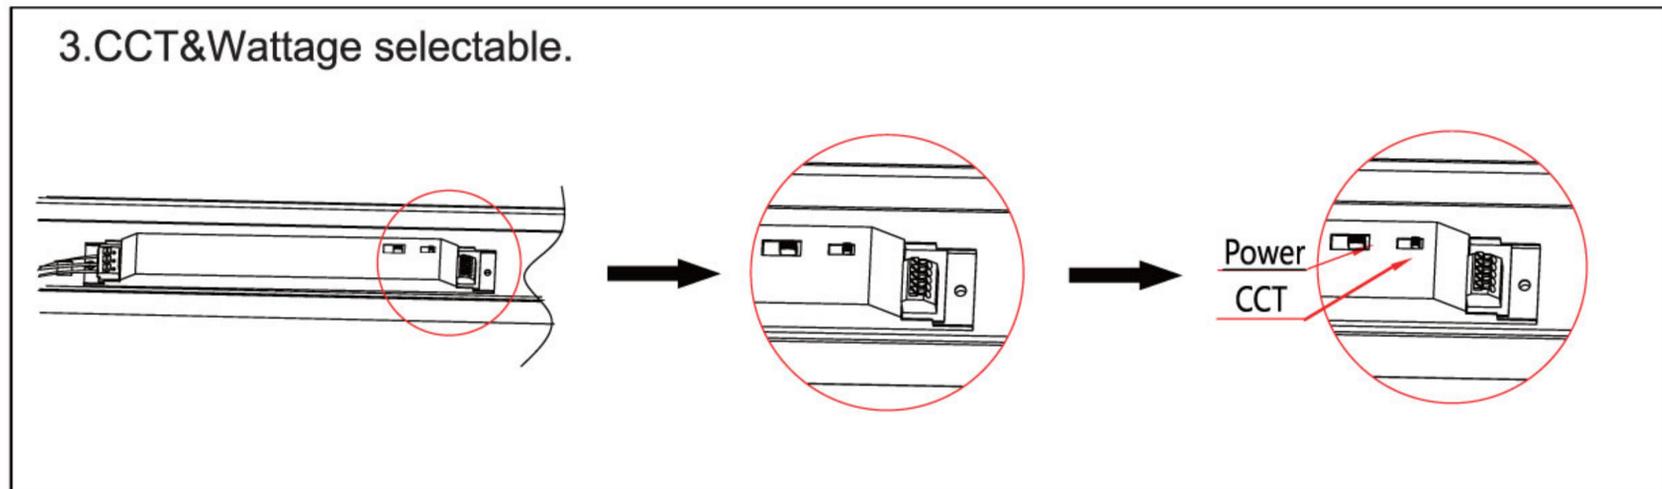


SURFACE MOUNTED INSTALLATION

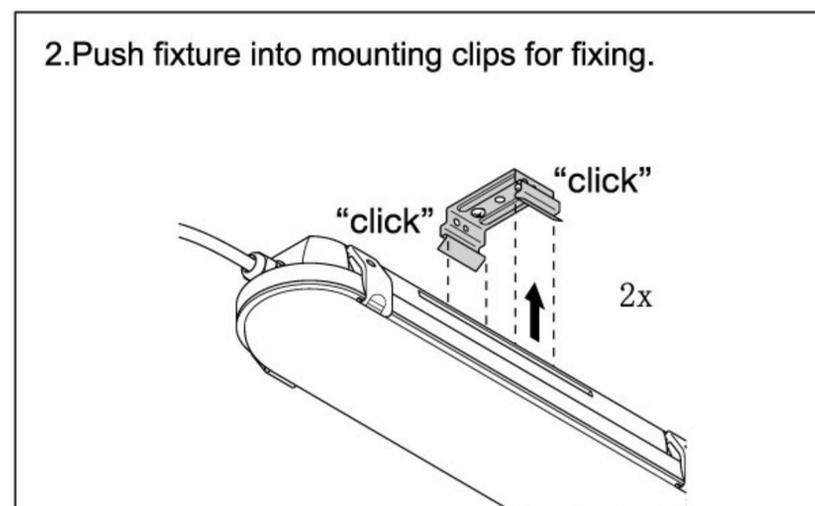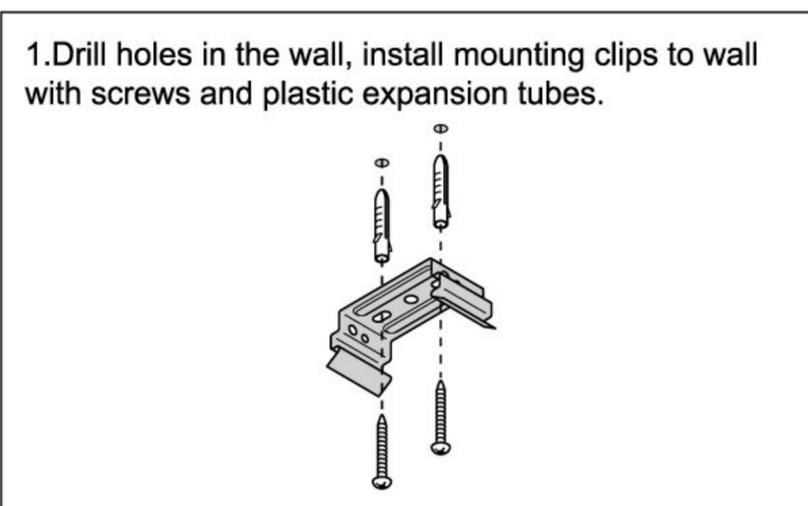


SURFACE MOUNTED INSTALLATION

3. Installed view as bellow figure.

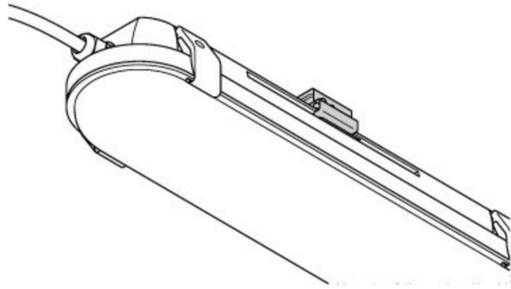

4. Turn on lights after connecting to line voltage.

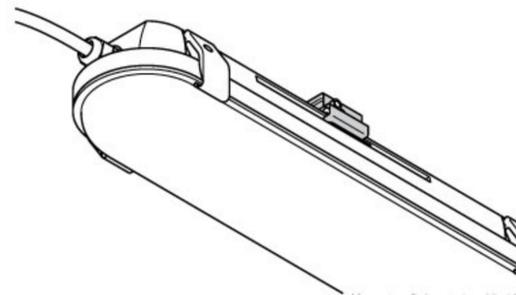


SUSPENDED INSTALLATION


1. Drill hole in the wall, install the fixing base with a screw and a plastic expansion tube.



2. Hang the mounting clip to the hook of suspension cable.

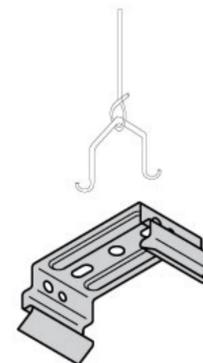

3. Push the fixture into mounting clip for fixing.

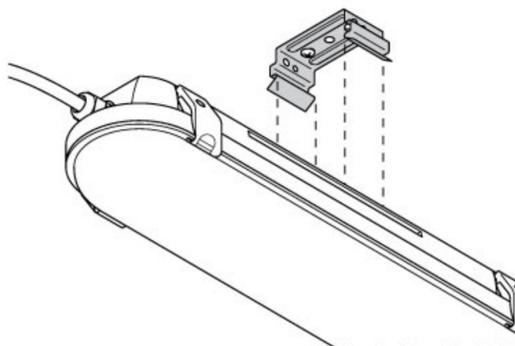

4. Turn on the lights after installation.

