

LED VAPOUR TIGHTS

VT-W60-3CCT+W | VT-W60MS-3CCT+W

HIGHLIGHTS

Wide LED vapour tight suitable for wet locations

- 4.92" wide body - fully covers most traditional junction boxes
- Slotted iron Board, excellent heat dissipation
- Suitable for all commercial needs
- Modular installation, save labor cost
- IP Rating 66 - rated for wet location
- Corrosion Resistant
- **WMS** model comes with motion sensor with dip switch installed



DIMENSIONS



Model	LxWxH (mm/inch)
VT-W60-3CCT+W VT-W60MS-3CCT+W	1200*125*88 (mm) / 47.24"*4.92"*3.46"

SPECIFICATIONS

Model	VT-W60-3CCT+W VT-W60MS-3CCT+W
Wattage	40W 50W 60W
Voltage	AC120-347V
Power Factor	>0.9
Beam Angle	120°
Lifetime	50000 hours
Dimmable	Yes(only 0-10v dimming available)
Warranty	5 years
Grade of Protection	IP66
Luminous Efficiency	≥130LM/W
Colour Temp.	3500K / 4000K / 5000K
Application	Supermarket / Warehouse / Underground parking place / Garage / Workshops
Operating Temp.	-20°C ~ +40°C
Case Quantities	8

ACCESSORIES




VT-SUS-KIT (aircraft cable length: 4.92ft.)

LED VAPOUR TIGHTS

VT-W60-3CCT+W | VT-W60MS-3CCT+W

TESTING REPORT

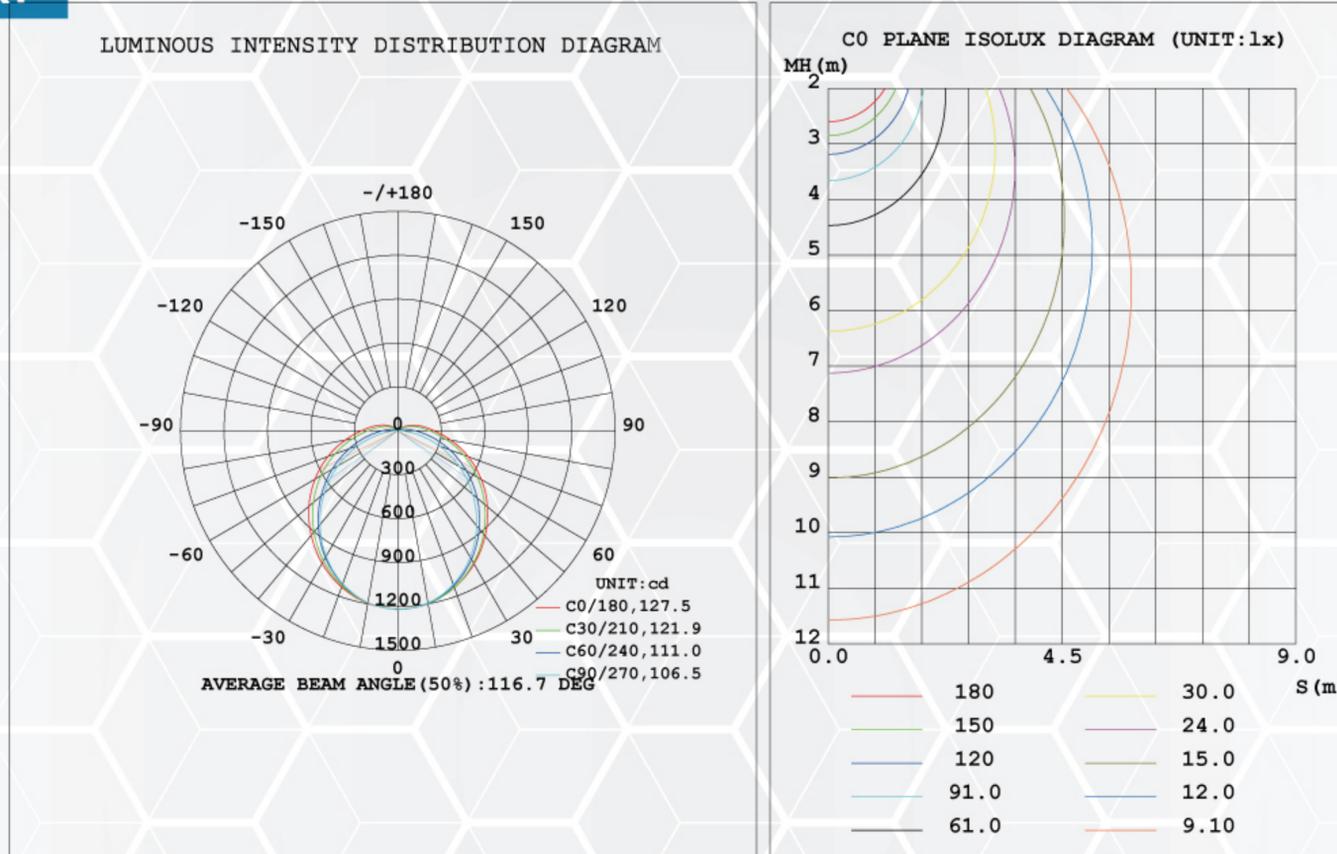

APPLICATIONS



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.