

Projet:

Type:


Qté:

Wall Pack Eco 120-100-80W 120-347V 3000-4000-5000K

SpecLite Eco Wall Lighting is an economical, high-performance alternative to traditional Wall Packs up to 400W MH or HPS. The luminaire's aluminum structure and anti-yellowing polycarbonate lens make it impact and weather resistant. This Wall Pack is also equipped with two dip switches for selecting wattage and color temperature (CCT: 3000K, 4000K and 5000K) directly on installation. Eco Wall Pack lighting provides optimum lighting performance and robustness, ideal for demanding outdoor environments.

CARACTERISTICS

- 120° wide-angle lens: Provides optimal light diffusion for lighting at the base of walls.
- Integrated photocell: Automates lighting based on ambient light, ensuring activation from dusk to dawn.
- Universal application: Offers 3 color temperatures (3CCT) and 3 selectable wattages, while being compatible with voltages ranging from 120VAC to 347VAC.
- DLC Premium Certified: Optimizes eligibility for energy subsidies to maximize savings.

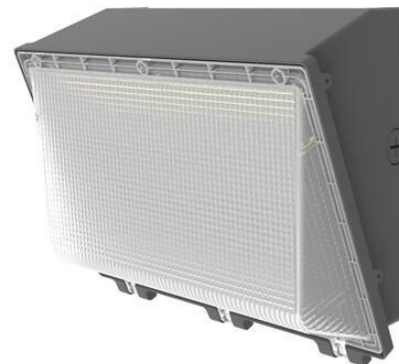**NOMENCLATURE**

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
WP	00	C	R	F	C	120	0	P	V2
Wall pack	120°	clear	bronze	120-347V	3000-4000-5000K	120-100-80W	N/A	int. photo.	V2

PHOTOMETRIC SPECIFICATIONS

LUMENS	15,600
CCT	3CCT (3000-4000-5000K)
ANGLE	70°*115°(±5°)
C.R.I.	81
DIMMABLE	0-10V DC
PHOTOCELL	Integrated Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	468
LED VOLTAGE	230V DC
LED MAX CURRENT	438mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Bronze
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	2.10 KG
OPERATING TEMP.	-40°C ~ 45°C

ELECTRICAL SPECIFICATIONS


REAL POWER	120 W
VOLTAGE	120-347V
EFFICIENCY	130 lm/w
POWER FACTOR	94 %
T.H.D	11.1 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-MQNH6V
FCC	No
BARCODE	882110007830
ENVIRONMENTAL	IP65
IK PROTECTION	IK06
SURGE PROTECTION WITH GROUNDING	6KV
SURGE PROTECTION WITHOUT GROUNDING	6KV

APPLICATION	Indoor / Outdoor
INSTALLATION	Wall Mount
CABLE LENGTH	N/A

DIMENSIONS

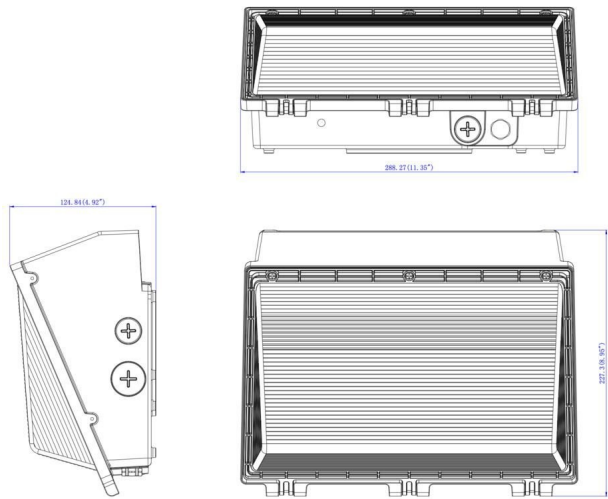

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
37.50 cm X 28.00 cm X 17.50 cm	50.50 cm X 32.10 cm X 32.00 cm	4	8.60 kg	360 
14 3/4 " X 11 " X 6 7/8 "	19 7/8 " X 12 5/8 " X 12 5/8 "		18.96 lbs	

PRODUCTS IMAGES

