

LED Wall Pack 10



WP10-15W-25W-VAR-V4

Date:	Project:	Comments:
Prepared for:	Type:	



CCT Selectable
3000K | 4000K | 5000K

IP65

Photocell Included



Performance Specifications

Power (Selectable)	15W/20W/25W
Equivalent Power	
Input Voltage	120-347Vac
Input Current	0.275A
Photocell	On by default. Disconnectable.
Color Temperature (Selectable)	3000K / 4000K / 5000K
Lumens (Up to)	3250lm @ 25W
Efficacy	130lm/W
Color Rendering Index (CRI)	80+
Lifetime	50,000 Hours
Dimming Type	0-10V Dimming
Power Factor	>0.9
Total Harmonic Distortion (THD)	<20%

Physical Specifications

Dimensions	8-1/16" (205 mm) x 3-1/16" (78.5 mm) x 5-13/16" (147 mm)
Cord Length	6" (150mm)
Weight	2.31 lbs (1.05 kg)
Beam Angle	90° Vertical - 140° Horizontal
Operating Temperature	-40°C to 40°C
Environment	Wet Location
Material of Body	Aluminum
Material of Lens	Polycarbonate
Color	Dark bronze

Ordering Specifications

Years of Warranty	5 years
Certification and Compliances	cETLus, DLC Premium

Ordering Information

Orders placed by 3pm are shipped out same-day

Ordering Code	Model Number	Input Voltage	Power (Selectable)	Lumens	Color Temperature (Selectable)
WP10-15W-25W-VAR-V4	WAL10R0025W-H-MV-TCP(PT)-V4	120-347Vac	15W/20W/25W	3250lm @ 25W	3000K/4000K/5000K



Dimensions




Length	Width	Depth
8-1/16" (205mm)	5-13/16" (147mm)	3-1/16" (78.5mm)


Photometrics

4000K CCT

Luminous Intensity distribution

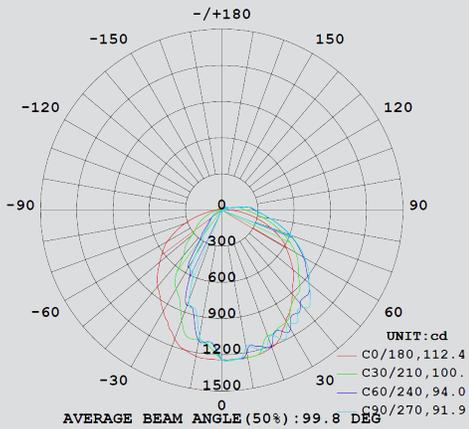

Illuminance at a distance

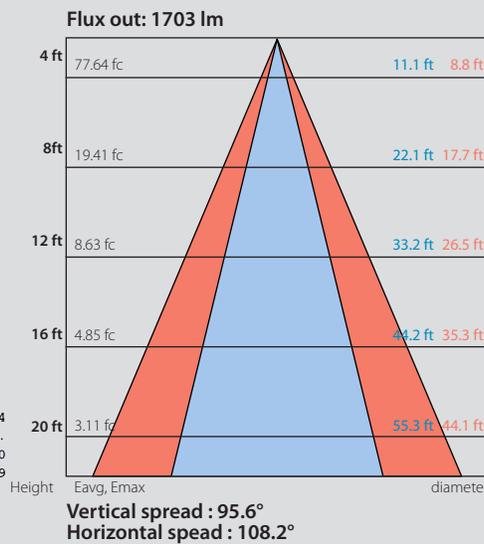

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	870.5	25.6%	26.7%
0-40	1,360.9	40%	41.8%
0-60	2,296.0	67.4%	70.5%
60-90	754.1	22.1%	23.2%
70-100	487.9	14.3%	15%
90-120	161.4	4.7%	5%
0-90	3,050.2	89.6%	93.6%
90-180	206.9	6.1%	6.4%
0-180	3,257.0	95.6%	100%

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

