


Date: _____ Project: _____
Prepared for: _____ Type: _____
Comments: _____

CLASSIC WALL PACK 2

CLASS I LUMINAIRE | IP65

- 5 Years
- Lifetime 50 000 hours
- IP65 Suitable for use in wet locations
- 3000K 4000K 5000K Toggle Switch CCT Selectable
- DLC LISTED PREMIUM
- ETL LISTED US
- LED DEL

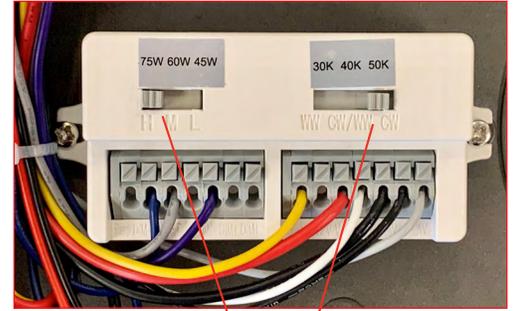


Switches
(Selectable Power and Selectable Color Temperature)

SPECIFICATIONS
Class I Luminaire
IP65 - Suitable for Wet Locations
Robust Aluminum Die-Cast Casing
Prismatic tempered glass lens
Colour Rendering Index: >70
Functioning Temperature: -40°C to 45°C
Power Factor: 0.90
THD($\%$<math>< 20\%</math>
Surge Protection : 4KV

AVAILABILITY
Power Selectable
Selectable Colour Temperature
Multi-Voltage (120-347Vac)
0-10V Dimmable


This is a STOCK item:
Look for this Same Day Shipping icon below in 'Ordering Information' for products that ship on the same day (orders placed before 3pm) from Montreal, Quebec or Calgary, Alberta

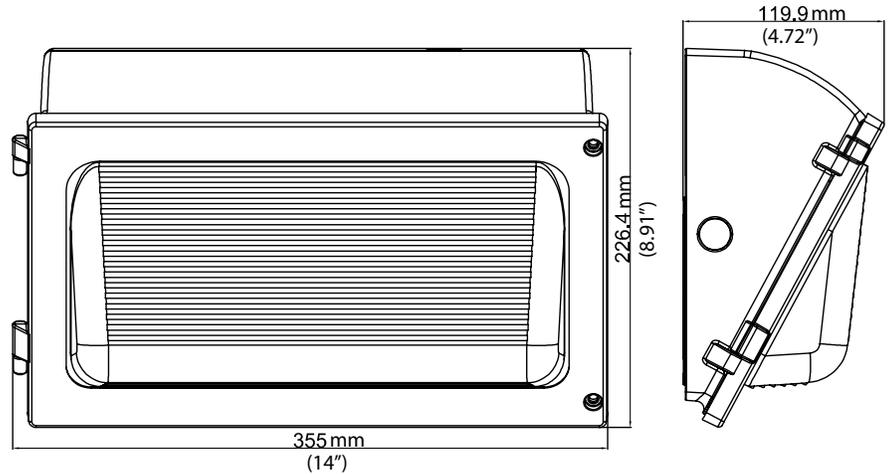




ORDERING INFORMATION

SERIES	INPUT VOLTAGE	POWER	EQUIVALENT TO (WATTS)	LUMENS	COLOUR	PRODUCT ID	MODEL NUMBER	ORDERING CODE
WALL PACK 2 V4	120-347Vac	SELECTABLE 45W 60W 75W	100 MH 150 MH 175 MH	9750lm AT 75W (130lm/W)	3000K/ 4000K/ 5000K	P6H07J8X	WAL12R0075W-7075C-30EA-V4	WP2-45W-75W-VAR-V4
		SELECTABLE 72W 96W 120W	175 MH 200 MH 250 MH	15600lm AT 120W (130lm/W)	3000K/ 4000K/ 5000K	PGZA5EMA	WAL12R0120W-7120C-30EA-V4	WP2-72W-120W-VAR-V4

ACCESSORIES

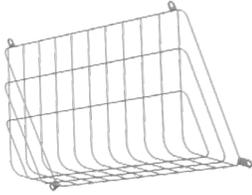

Wire Guard
WP-AC-WG

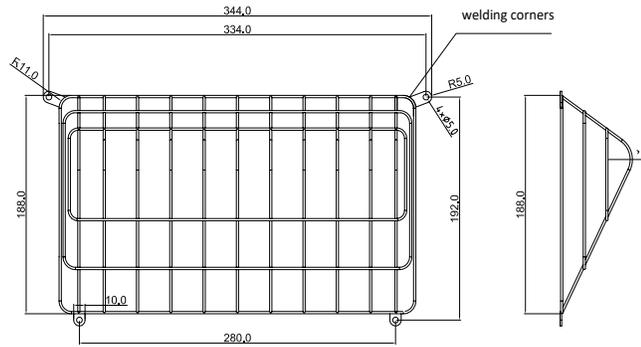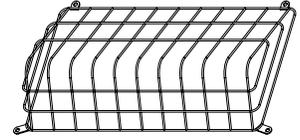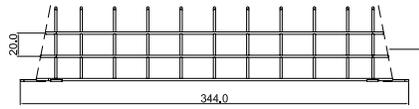

SERIES	COMPATIBLE WITH	ORDERING NUMBER
WIRE GUARD	WALL PACK 2 V4	WP-AC-WG 




Photocell
WP-CELL-V3 (120-277V)

SERIES	COMPATIBLE WITH	ORDERING NUMBER
PHOTOCELL	WALL PACK 2 V4	WP-CELL-DC-12V 



PHOTOMETRIC REPORT


WP2-45W-75W-VAR-V4 (45W 5000K)

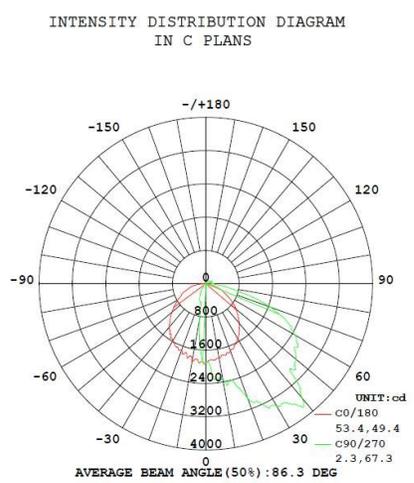

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,351.6	22%	22%
0-40	2,320.5	37.7%	37.7%
0-60	4,404.4	71.6%	71.6%
60-90	1,506.9	24.5%	24.5%
70-100	706.7	11.5%	11.5%
90-120	148.8	2.4%	2.4%
0-90	5,911.3	96.1%	96.1%
90-180	241.4	3.9%	3.9%
0-180	6,152.8	100%	100%


WP2-45W-75W-VAR-V4 (60W 5000K)

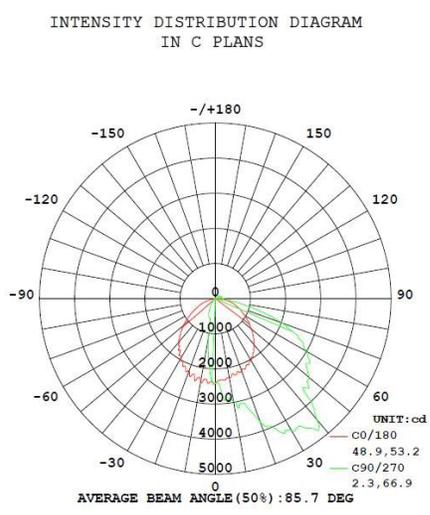

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	1,709.0	22.1%	22.1%
0-40	2,935.4	38%	38%
0-60	5,548.2	71.9%	71.9%
60-90	1,870.8	24.2%	24.2%
70-100	873.6	11.3%	11.3%
90-120	186.0	2.4%	2.4%
0-90	7,419.1	96.1%	96.1%
90-180	302.5	3.9%	3.9%
0-180	7,721.5	100%	100%

WP2-45W-75W-VAR-V4 (75W 5000K)

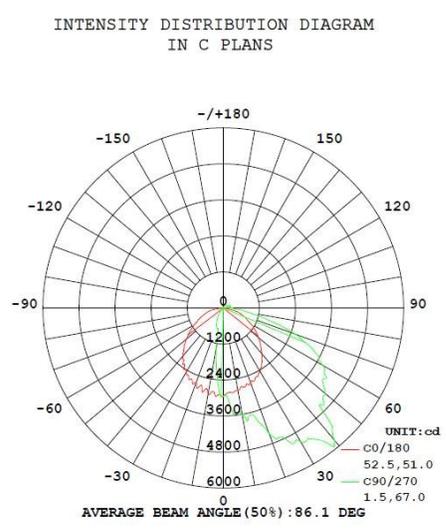


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,055.4	21.7%	21.7%
0-40	3,526.0	37.2%	37.2%
0-60	6,754.2	71.3%	71.3%
60-90	2,352.3	24.8%	24.8%
70-100	1,109.9	11.7%	11.7%
90-120	231.4	2.4%	2.4%
0-90	9,106.5	96.1%	96.1%
90-180	372.9	3.9%	3.9%
0-180	9,479.3	100%	100%



WP2-72W-120W-VAR-V4 (72W 5000K)

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

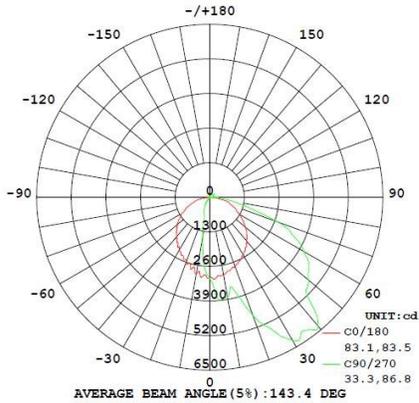


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,205.0	21.3%	21.3%
0-40	3,836.3	37.1%	37.1%
0-60	7,430.8	71.8%	71.8%
60-90	2,520.7	24.4%	24.4%
70-100	1,148.0	11.1%	11.1%
90-120	219.4	2.1%	2.1%
0-90	9,951.5	96.2%	96.2%
90-180	394.3	3.8%	3.8%
0-180	10,345.8	100%	100%

WP2-72W-120W-VAR-V4 (96W 5000K)

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

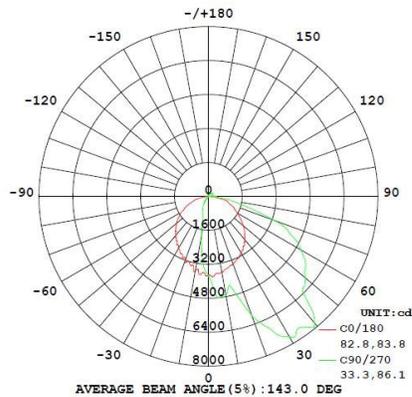


Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,738.2	21.5%	21.5%
0-40	4,762.6	37.3%	37.3%
0-60	9,194.6	72%	72%
60-90	3,084.3	24.2%	24.2%
70-100	1,392.6	10.9%	10.9%
90-120	268.0	2.1%	2.1%
0-90	12,279.0	96.2%	96.2%
90-180	484.4	3.8%	3.8%
0-180	12,763.4	100%	100%

WP2-72W-120W-VAR-V4 (120W 5000K)

INTENSITY DISTRIBUTION DIAGRAM
IN C PLANS

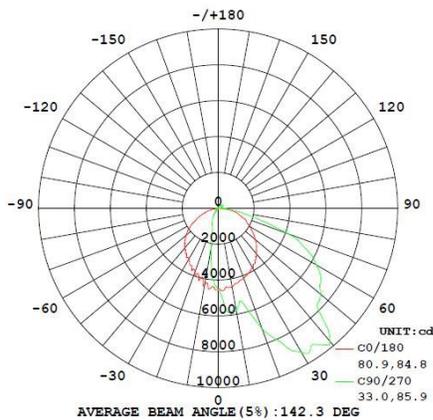

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,205.0	21.3%	21.3%
0-40	3,836.3	37.1%	37.1%
0-60	7,430.8	71.8%	71.8%
60-90	2,520.7	24.4%	24.4%
70-100	1,148.0	11.1%	11.1%
90-120	219.4	2.1%	2.1%
0-90	9,951.5	96.2%	96.2%
90-180	394.3	3.8%	3.8%
0-180	10,345.8	100%	100%

* Data is based on tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued at any time without notice. Colour temperature and Lumen output are changeable up to 5%.