

Projet: _____ **Type:** _____

Éclairage d'Urgence Autonome - Double Tête

The SpecLite Emergency Light Dual-Head is designed to ensure maximum safety in corridors and passage areas during a power outage. Equipped with two light heads, it offers extended coverage, guaranteeing optimal visibility over larger areas. With its built-in battery, this model provides reliable emergency lighting for a minimum of 90 minutes, giving occupants the necessary time to evacuate safely. Compatible with a power supply ranging from 100V to 347V, this compact and robust fixture is made from durable ABS with a PMMA lens for optimal light performance. The high-quality SMD 2835 LEDs deliver 200 lumens with a color temperature of 7000K, creating powerful and effective illumination in emergency situations. This model is designed for surface mounting, making it an ideal fit for indoor environments.



CARACTERISTICS

- Emergency autonomy: Provides reliable lighting for 90 minutes in case of a power outage, with extended coverage thanks to its two light heads.
- High light performance: Equipped with SMD 2835 LEDs, delivering 200 lumens at 7000K for optimal visibility.
- Versatile compatibility: Works with a power supply from 100V to 347V, suitable for various indoor environments.
- Robust construction: Made of durable ABS with a PMMA lens, designed for surface mounting, ideal for emergency corridors.



NOMENCLATURE

SERIE	VER.
ZZ	
Accessories	

PHOTOMETRIC SPECIFICATIONS

LUMENS	200
CCT	7000K
ANGLE	N/A
C.R.I.	80
DIMMABLE	N/A
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	N/A
LED TYPE	SMD 2835
LED QTY	24
LED VOLTAGE	2.9-3.2V
LED MAX CURRENT	150mA
FLICKER	Flicker-Free

ELECTRICAL SPECIFICATIONS

REAL POWER	4 W
VOLTAGE	100-347V
EFFICIENCY	50 lm/w
POWER FACTOR	%
T.H.D	
FREQUENCY	50/60Hz

CERTIFICATIONS


REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	
BARCODE	882110006130
ENVIRONMENTAL	IP20
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	
SURGE PROTECTION WITHOUT GROUNDING	

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	ABS
HOUSING FINISH	White
LENS MATERIAL	PMMA
LENS FINISH	
WEIGHT	0.40 KG
OPERATING TEMP.	-40°C ~ 40°C
APPLICATION	Indoor

INSTALLATION	Surface Mount
CABLE LENGTH	N/A

DIMENSIONS

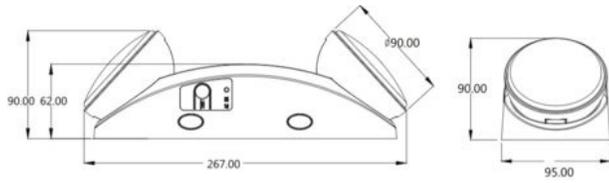

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
30.00 cm X 10.00 cm X 9.00 cm	46.20 cm X 31.70 cm X 41.80 cm	20	9.00 kg	240 
11 3/4 " X 3 7/8 " X 3 1/2 "	18 1/4 " X 12 1/2 " X 16 1/2 "		19.84 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7