

FLUSH MOUNTS

1701-12SN-5CCT | 1702-14SN-5CCT



HIGHLIGHTS

12" And 14" LED Flush Mount With Opal PMMA Diffuser And Glare Free Illumination

- Uniform bright light
- LED: DOB (Driver on Board) technology
- No extra mounting bracket required
- Suitable for DAMP LOCATION
- Constructure: strong steel with white PMMA diffuser



CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	1701-12SN-5CCT	1702-14SN-5CCT
Wattage	15W	22W
Voltage	120V AC, 60Hz	120V AC, 60Hz
Lumens	1000 lmn	1600 lmn
Beam Angle	115°	115°
Lifetime	50,000 hours	50,000 hours
Dimmable	Yes (TRIAC dimming)	Yes (TRIAC dimming)
Grade Of Protection	IP41	IP41
CRI	80	80
Diffuser/Lens Material	PMMA	PMMA
Rating	Non-IC rated/Damp location/ Indoor use	Non-IC rated/Damp location/ Indoor use
Operating Temperature	-20°C ~ +40°C	-20°C ~ +40°C

**FLAT-OUT
FABULOUS
CEILING
PERFECTION**

5 YEAR WARRANTY

DIMENSIONS

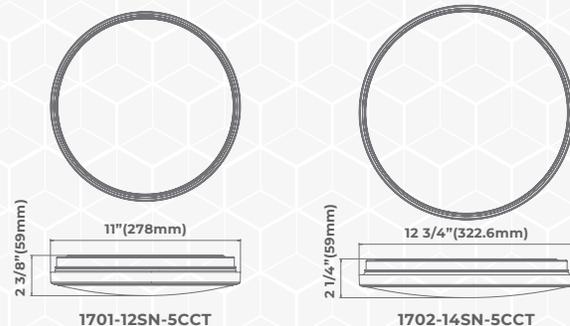


ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

FLUSH MOUNTS

1701-12SN-5CCT | 1702-14SN-5CCT

INSTALLATION

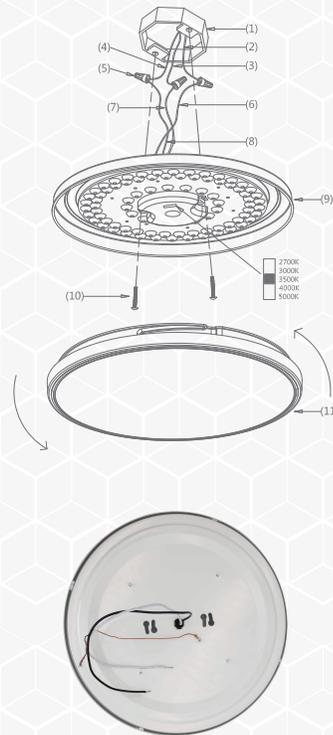

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

