


LED WRAP-AROUND LIGHTS

4WA-3CCT+W

HIGHLIGHTS

4FT Power and CCT adjusted Wrap-Around Light

- Universal voltage: 120-347V
- Available with surface-mounted installation
- Diffused light, Damp location rated, Polycarbonate lens
- Power and CCT can be adjusted in three levels
- 5 year warranty

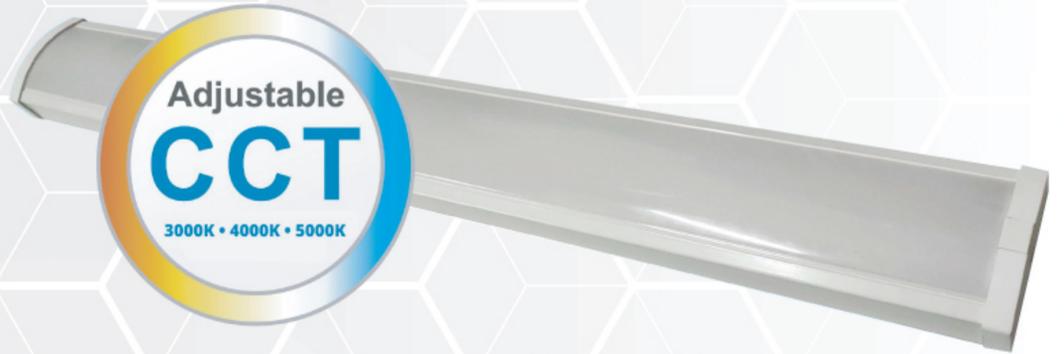

DIMENSIONS



Model	L×W×H (mm/inch)
4WA-3CCT+WT	1194*136*55/47''*5.36''*2.17''

WATTAGE SELECTABLE




SPECIFICATIONS

Model	4WA-3CCT+W
Wattage	30W 40W 50W
Voltage	AC120-347V
Lumens	3300lmn 4400lmn 5500lmn
Beam Angle	110°
Lifetime	50000 hours
Dimmable	Yes(only 0-10v dimming available)
Rating	Wet locations
Grade of Protection	IP65
CRI	>80
Colour Temp.	3500K / 4000K / 5000K
Application	School / Hospital / Super market / Office / Warehouse
Operating Temp.	-20°C ~ +45°C
Case Quantities	6

LED WRAP-AROUND LIGHTS

4WA-3CCT+W

TESTING REPORT

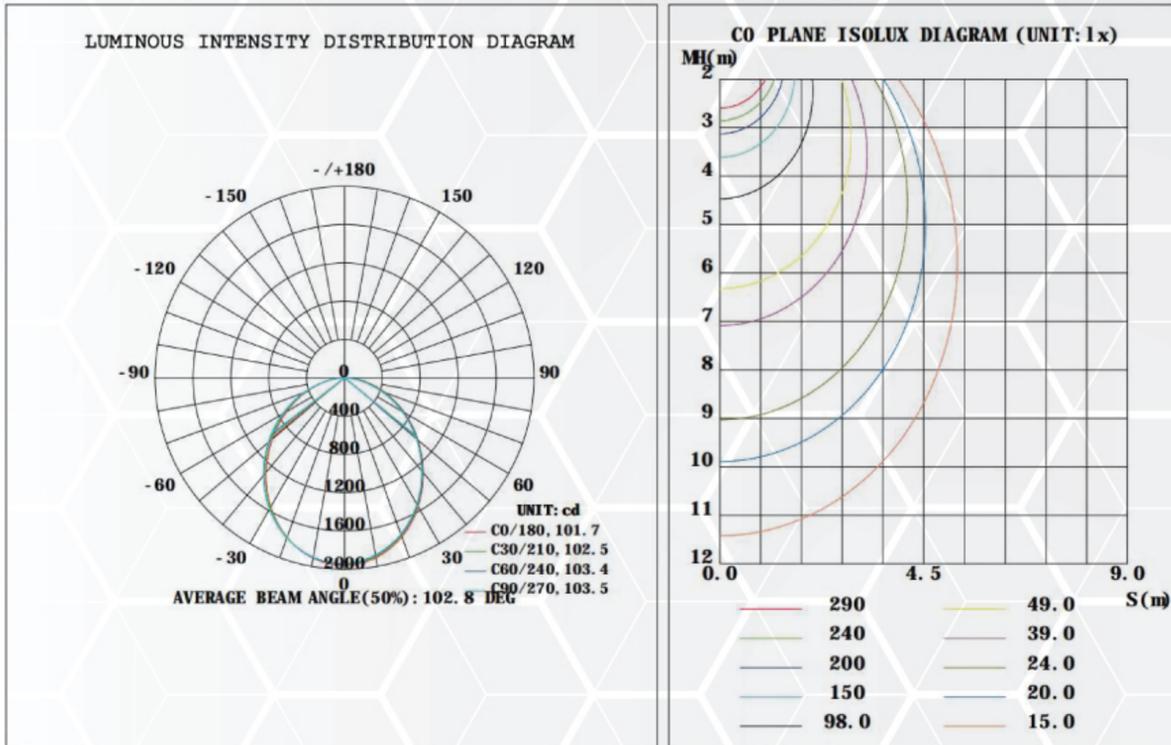


ACCESSORIES



SUS-KIT

APPLICATIONS

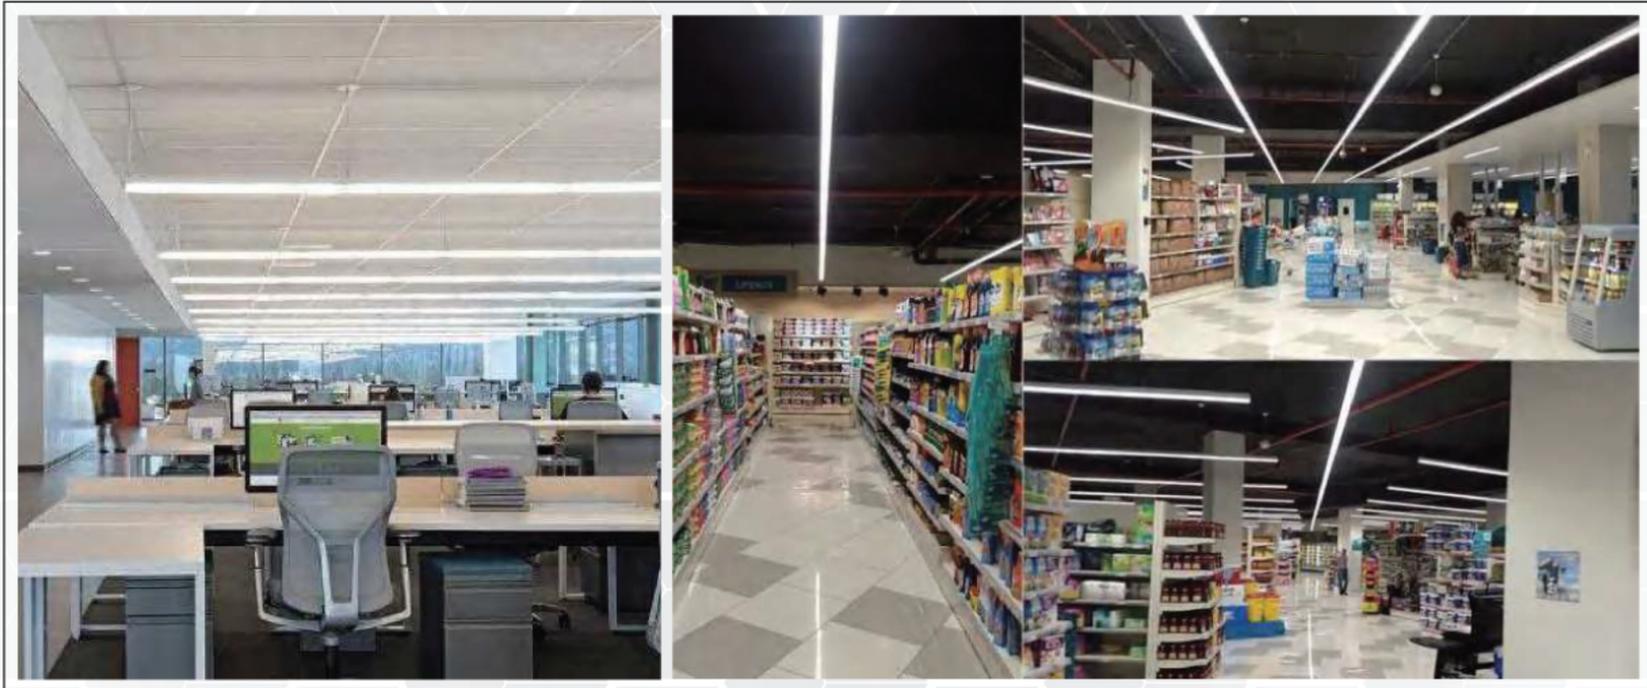

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.