


Date:	Project:
Prepared for:	Type:
Comments:	

## RANGE AND DRYER OUTLETS




OU1-30A-DY-WH-V2  
(Front view)



OU1-50A-ST-WH-V2  
(Front view)



OU1-30A-DY-WH-V2  
(Rear view)

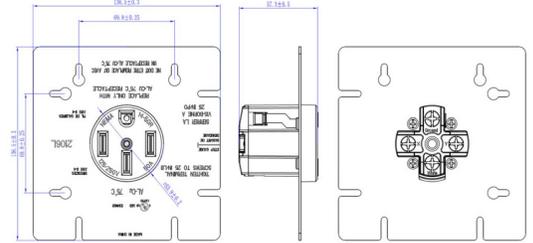

### SPECIFICATIONS

#### Characteristics

- Suitable for Copper & Aluminum
- Industrial grade



<b>Input voltage</b>	125/250Vac
<b>Rated Working Current</b>	30A (OU1-30A-DY-WH-V2) / 50A (OU1-50A-ST-WH-V2)
<b>Maximum power</b>	7500W (30A) / 12500W (50A)
<b>Environment</b>	Suitable for Dry Locations.
<b>Wire size</b>	#10 - #4 AWG Solid (OU1-30A-DY-WH-V2) / #8 - #4 AWG Solid (OU1-50A-ST-WH-V2)
<b>Conductor Material</b>	Solid copper & Aluminum
<b>Color Options</b>	White
<b>Weight</b>	314g
<b>Material</b>	Steel Body with Copper Contacts
<b>Warranty</b>	2 years
<b>Certifications</b>	cULus
<b>Dielectric voltage</b>	Withstands 2000V per UL498
<b>Flammability</b>	Rated V-2 per UL94
<b>Operating Temperature</b>	-40°C to 60°C

### ORDERING INFORMATION:

Stock item. Same Day Shipping for orders placed by 3pm EST

SERIES	FINISH	RATED WORKING CURRENT	ORDERING CODE
RANGE AND DRYER OUTLETS	WHITE	30A	OU1-30A-DY-WH-V2
		50A	OU1-50A-ST-WH-V2