

Projet: \_\_\_\_\_ Type: \_\_\_\_\_ Qté: \_\_\_\_\_

**Area Light V2 150W 100-277V 4000K**

**CARACTERISTICS**

- -
- -
- -
- -



**NOMENCLATURE**

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
AL	3M	C	R	D	4	150	0	P	RL
Area light	type3M	clear	bronze	100-277V	4000K	150W	N/A	twist lock photo	RL

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	21,141
CCT	4000K
ANGLE	Type 3-M
C.R.I.	71.4
DIMMABLE	0-10V DC
PHOTOCELL	Twist Lock Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	75,000 hrs
LED TYPE	SMD2835
LED QTY	240
LED VOLTAGE	48V
LED MAX CURRENT	2804mA
FLICKER	Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Aluminium, Powder Coated
HOUSING FINISH	Bronze
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	3.40 KG
OPERATING TEMP.	-40°C ~ 40°C

**ELECTRICAL SPECIFICATIONS**


REAL POWER	150.7 W
VOLTAGE	100-277V
EFFICIENCY	140.94 lm/w
POWER FACTOR	96.8 %
T.H.D	4.6 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	PMY4V9UG
FCC	No
BARCODE	882110006666
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	10KV
SURGE PROTECTION WITHOUT GROUNDING	6KV

<b>APPLICATION</b>	Outdoor
<b>INSTALLATION</b>	Wall & Poll Mount
<b>CABLE LENGTH</b>	4'

## DIMENSIONS

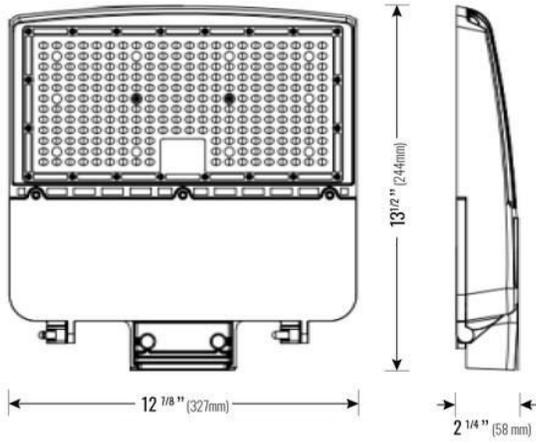

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
40.00 cm X 37.00 cm X 14.00 cm	N/A	N/A	4.00 kg	84 
15 3/4" X 14 5/8" X 5 1/2"			8.82 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
 HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
 WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7