

Projet: _____ Type: _____ Qté: _____

Area Light V2 300W 277-480V 4000K

CARACTERISTICS

- -
- -
- -
- -



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
AL	3M	C	R	H	4	300	0	P	RL
Area light	type3M	clear	bronze	277-480V	4000K	300W	N/A	twist lock photo	RL

PHOTOMETRIC SPECIFICATIONS

LUMENS	43,144
CCT	4000K
ANGLE	Type 3-M
C.R.I.	71.8
DIMMABLE	0-10V DC
PHOTOCELL	Twist Lock Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	75,000 hrs
LED TYPE	SMD2835
LED QTY	480
LED VOLTAGE	48V
LED MAX CURRENT	5800mA
FLICKER	Flicker-Free

ELECTRICAL SPECIFICATIONS

REAL POWER	301.5 W
VOLTAGE	277-480V
EFFICIENCY	143.34 lm/w
POWER FACTOR	95.6 %
T.H.D	14.7 %
FREQUENCY	50/60Hz


CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	PK7DZ0A7
FCC	No
BARCODE	882110006703
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	10KV
SURGE PROTECTION WITHOUT GROUNDING	6KV

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Aluminium, Powder Coated
HOUSING FINISH	Bronze
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	6.20 KG
OPERATING TEMP.	-40°C ~ 40°C
APPLICATION	Outdoor
INSTALLATION	Wall & Poll Mount
CABLE LENGTH	4'

DIMENSIONS

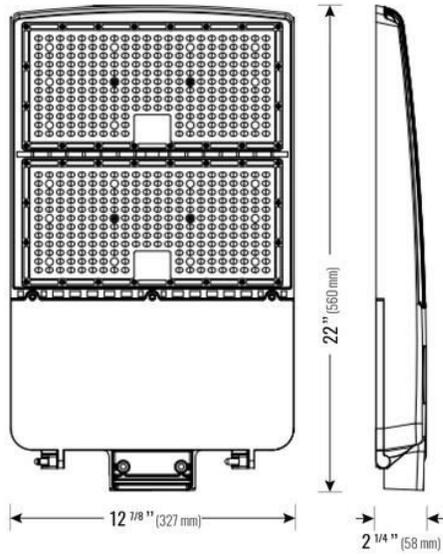

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
63.00 cm X 34.00 cm X 14.00 cm	N/A	N/A	7.00 kg	48 
24 3/4" X 13 3/8" X 5 1/2"			15.43 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7