

<b>Projet:</b>	<b>Type:</b>	<b>Qté:</b>
----------------	--------------	-------------

**Area Light 3-Wattages 3-CCT photocell optional 300-240-200W 120-347V 3000-4000-5000K**

The Speclite perimeter floodlight can replace your Metal Halide (MH) and High Pressure Sodium (HPS) bulbs up to 1000W, saving up to 75% on energy costs. Available with four installation brackets to suit every situation. Featuring three dip-switch selectable wattages and three dip-switch adjustable color temperatures (3000K, 4000K and 5000K), it is also ready to accept an optional photocell and an optional occupational sensor, compatible with our universal remote control for all our indoor and outdoor products. The Area Light Speclite V4 is specially designed to replace existing MH or HPS lighting, increase brightness and reduce maintenance costs, all at a competitive price. Ideal for parking lots, outdoor areas and industrial zones, it ensures optimum performance and a significant reduction in energy and maintenance costs. You'll appreciate its ease of installation, and your customers will be won over by its energy efficiency.



**CARACTERISTICS**

- Adjustable lens: The Type-3M lens offers even light distribution for large surfaces. The same lens can be rotated to provide a +/- 90Deg or +/-180deg angle. Other lens types (I, II, IV, V, and asymmetrical) are available on request.
- Sensors: Ready to accept a 3-pin twist lock photocell (sold separately) to adjust lighting according to ambient light, this luminaire is also ready to accept a programmable Zhaga occupancy sensor (sold separately) to reduce energy consumption.
- Complete Flexibility: Three color temperatures (3000K, 4000K, and 5000K), three power levels, and a universal voltage (120-347VAC) for versatile use.
- DLC Premium Certification: Ensures maximum eligibility for subsidies, optimizing return on investment.



**NOMENCLATURE**

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
AL	3M	C	R	F	C	300	M	P	V2
Area light	type3M	clear	bronze	120-347V	3000-4000-5000K	300-240-200W	motion base	Photocell base	V2

**PHOTOMETRIC SPECIFICATIONS**

<b>LUMENS</b>	45,126
<b>CCT</b>	3000/4000/5000K
<b>ANGLE</b>	T3
<b>C.R.I.</b>	73
<b>DIMMABLE</b>	0-10V DC
<b>PHOTOCELL</b>	Twist Lock Photocell
<b>SENSOR</b>	Motion Sensor Receptacle
<b>LUMEN MAINTENANCE L70</b>	50,000 hrs
<b>LED TYPE</b>	SMD 3030
<b>LED QTY</b>	420
<b>LED VOLTAGE</b>	256V DC
<b>LED MAX CURRENT</b>	200mA
<b>FLICKER</b>	Flicker-Free

**MECHANICAL SPECIFICATIONS**

<b>HOUSING MATERIAL</b>	Die casting Aluminium
<b>HOUSING FINISH</b>	Bronze
<b>LENS MATERIAL</b>	Polycarbonate

**ELECTRICAL SPECIFICATIONS**

<b>REAL POWER</b>	298.1 W
<b>VOLTAGE</b>	120-347V
<b>EFFICIENCY</b>	151.38 lm/w
<b>POWER FACTOR</b>	92 %
<b>T.H.D</b>	8.9 %
<b>FREQUENCY</b>	50/60Hz


**CERTIFICATIONS**

<b>REGULATORY LISTING</b>	cUL
<b>EFFICIENCY LISTING</b>	DLC Premium
<b>DLC ID</b>	S-T7WVTY
<b>FCC</b>	No
<b>BARCODE</b>	882110007854
<b>ENVIRONMENTAL</b>	IP65
<b>IK PROTECTION</b>	IK08
<b>SURGE PROTECTION WITH GROUNDING</b>	6KV
<b>SURGE PROTECTION WITHOUT GROUNDING</b>	6KV

---

<b>LENS FINISH</b>	Clear
<b>WEIGHT</b>	4.80 KG
<b>OPERATING TEMP.</b>	-40°C ~ 45°C
<b>APPLICATION</b>	Outdoor
<b>INSTALLATION</b>	Wall & Poll Mount
<b>CABLE LENGTH</b>	N/A


## DIMENSIONS

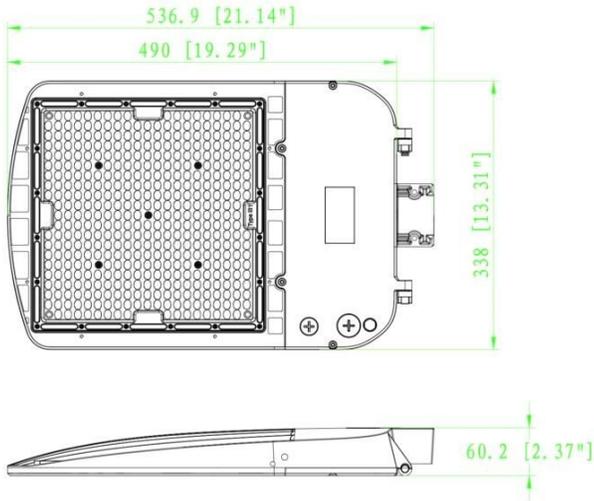

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
64.70 cm X 39.30 cm X 14.50 cm	N/A	N/A	5.00 kg	35 
25 1/2" X 15 1/2" X 5 3/4"			11.02 lbs	

## PRODUCTS IMAGES

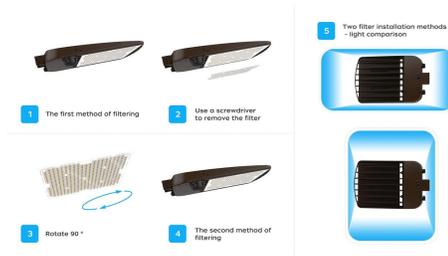

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7