

<b>Projet:</b>	<b>Type:</b>	<b>Qté:</b>
----------------	--------------	-------------

**Wall Pack Full Cutoff Adjustable 40-30-20W 120-347V 3000-4000-5000K**

The SpecLite Full Cutoff Wall Pack is a robust and versatile outdoor lighting solution, ideal for the most demanding outdoor environments. Available in two versions, a fixed 20W model and an adjustable 80W model, which can be set down to 20W, it perfectly adapts to the specific needs of each project. Its color temperature (CCT: 3000K, 4000K, 5000K) and lighting angle are also adjustable, offering optimal flexibility during installation. Made from cast aluminum, this wall pack is resistant to corrosion and impacts, ensuring exceptional durability. Additionally, it is equipped with an integrated photocell that automatically adjusts the lighting based on ambient brightness, optimizing energy efficiency. The SpecLite wall pack guarantees reliable and long-lasting performance.



**CARACTERISTICS**

- Full Cutoff Design: Completely eliminates light pollution, providing targeted and optimal outdoor lighting. Compliant with "Dark Sky" requirements.
- Integrated photocell: Automates lighting based on ambient light, ensuring activation from dusk to dawn.
- High-end minimalist aesthetics: Sleek design that seamlessly integrates with any type of architectural project.
- DLC Premium Certified: Ensures maximum eligibility for subsidies while providing durable and reliable performance.



**NOMENCLATURE**

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
AW	00	C	R	F	C	040	0	P	SS
Wall pack full cutoff	120°	clear	bronze	120-347V	3000-4000-5000K	40-30-20W	N/A	int. photo.	SS

**PHOTOMETRIC SPECIFICATIONS**

<b>LUMENS</b>	5,277
<b>CCT</b>	3000/4000/5000K
<b>ANGLE</b>	120°
<b>C.R.I.</b>	73
<b>DIMMABLE</b>	0-10V DC
<b>PHOTOCELL</b>	Integrated Photocell
<b>SENSOR</b>	Motion Sensor Receptacle
<b>LUMEN MAINTENANCE L70</b>	50,000 hrs
<b>LED TYPE</b>	SMD 2835
<b>LED QTY</b>	112
<b>LED VOLTAGE</b>	DC 180-260V
<b>LED MAX CURRENT</b>	150mA
<b>FLICKER</b>	Flicker-Free

**ELECTRICAL SPECIFICATIONS**

<b>REAL POWER</b>	40.2 W
<b>VOLTAGE</b>	120-347V
<b>EFFICIENCY</b>	131.27 lm/w
<b>POWER FACTOR</b>	94 %
<b>T.H.D</b>	12.3 %
<b>FREQUENCY</b>	50/60Hz

**CERTIFICATIONS**



<b>REGULATORY LISTING</b>	cUL
<b>EFFICIENCY LISTING</b>	DLC Premium
<b>DLC ID</b>	S-FFCDH1
<b>FCC</b>	No
<b>BARCODE</b>	882110007663
<b>ENVIRONMENTAL</b>	IP65
<b>IK PROTECTION</b>	IK06
<b>SURGE PROTECTION WITH GROUNDING</b>	6KV
<b>SURGE PROTECTION WITHOUT GROUNDING</b>	6KV

**MECHANICAL SPECIFICATIONS**

<b>HOUSING MATERIAL</b>	Die casting Aluminium
<b>HOUSING FINISH</b>	Bronze
<b>LENS MATERIAL</b>	Polycarbonate
<b>LENS FINISH</b>	Clear
<b>WEIGHT</b>	3.80 KG

<b>OPERATING TEMP.</b>	-40°C ~ 45°C
<b>APPLICATION</b>	Indoor / Outdoor
<b>INSTALLATION</b>	Wall Mount
<b>CABLE LENGTH</b>	N/A

**DIMENSIONS**

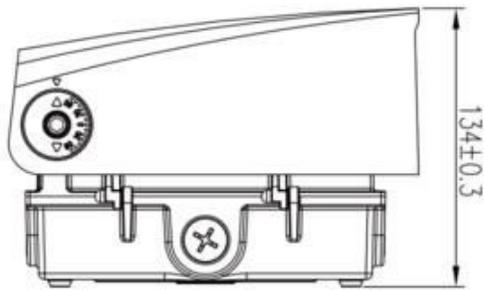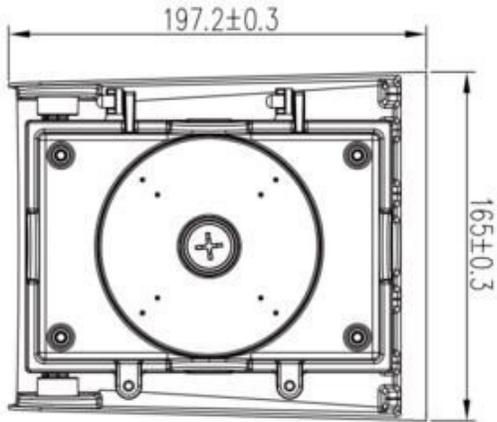

**PACKAGING**

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
23.20 cm X 20.00 cm X 16.90 cm 9 1/8 " X 7 7/8 " X 6 5/8 "	37.40 cm X 22.50 cm X 33.80 cm 14 3/4 " X 8 7/8 " X 13 1/4 "	4	7.10 kg 15.65 lbs	96 

**PRODUCTS IMAGES**

