

Projet: Type: Qté:

Barn Light 70W 100-277V 5000K

40

CHARACTERISTICS

- -
- -
- -
- -



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
BL	00	C	B	D	5	070	0	P	GE
Barn light	120°	clear	black	100-277V	5000K	70W	N/A	twist lock photo.	GE

PHOTOMETRIC SPECIFICATIONS

LUMENS	0
CCT	5000K
ANGLE	120°
C.R.I.	75
DIMMABLE	N/A
PHOTOCELL	Twist Lock Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	100,000 hrs
LED TYPE	SMD2835
LED QTY	112
LED VOLTAGE	61V
LED MAX CURRENT	1020mA
FLICKER	Not Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Aluminium, Powder Coated
HOUSING FINISH	Black
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	2.50 KG
OPERATING TEMP.	-40°C ~ 40°C

ELECTRICAL SPECIFICATIONS


REAL POWER	66.7 W
VOLTAGE	100-277V
EFFICIENCY	lm/w
POWER FACTOR	92.9 %
T.H.D	16.6 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	
BARCODE	882110000701
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	2KV
SURGE PROTECTION WITHOUT GROUNDING	1.2KV

APPLICATION	Outdoor
INSTALLATION	Wall & Poll Mount
CABLE LENGTH	5'

DIMENSIONS

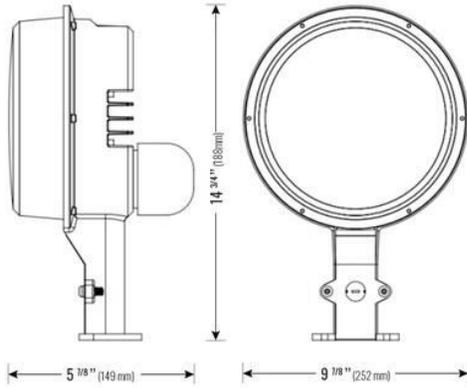

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
38.00 cm X 26.00 cm X 17.00 cm	N/A	N/A	3.00 kg	16 
15" X 10 1/4" X 6 3/4"			6.61 lbs	

PRODUCTS IMAGES

