

BL01 Bollard

Power Selectable | 3000K | 120-347V

Suitable for pathways, gardens, sidewalks, building entrances, and other landscapes that require low to the ground illumination

LIGHT ENGINE



Power Selectable 14W Maximum

25% / 50% / 75% / 100% field adjustable

Polyester Powder Coat Finish Black

Vandal Resistant IK10

Dark Sky Approved

when set to 3000K operation

*PICTURED WITH BASE POLE
(SOLD SEPARATELY)

BL01-14W-4P-3CCT-UD

BASE POLES



BL01-BASE19

BL01-BASE35

BL01-BASE42

Choose from 19", 35", and 42" Base Poles

NOTE: 19", 35", or 42" Base Poles are sold separately from light engine, and are **required** for installation.

19", 35", and 42" represent **total** height of the luminaire **including Base Pole and Light Engine**

MOUNTING



Mounting Plate
INCLUDED WITH
BASE POLE



Anchor Bolts & Plate
SOLD SEPARATELY
(BL01-PLATE)

**WET CONCRETE
INSTALLATION:**
Anchor Bolts & Plate
(BL01-PLATE) are **required** for
wet concrete installation.

SPILL CONTROL



Visor
SOLD SEPARATELY
(BL01-VISOR)



TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	1,680 lm
Efficacy	120 lm/W
CCT	3000K
CRI	80
Dimmable	0-10V
Beam Angle	Type V
L70 Life	60,000 hrs
Warranty	10-year
Factory Settings	14W 5000K

APPROVALS AND LISTINGS

cETL	5009705
------	---------

DIMENSIONS

NOTE: 19", 35", and 42" represent **total** height of the luminaire **including Base Pole and Light Engine**

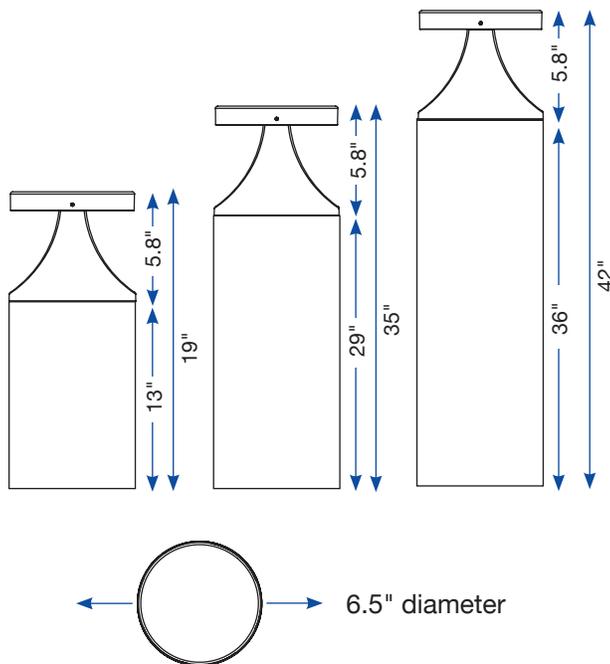

ELECTRICAL

Wattage	14W maximum (field adjustable to 25%, 50%, 75% or 100%)
Voltage	120-347V
Current	0.3A
Surge Protection	2kV
Auxiliary Output	N/A
Power Factor	0.9
THD	20%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Aluminum Alloy
Lens	Polycarbonate
Finish	Powder Coat
Finish Colour	Black
IP Rating	IP66

DIMENSIONS & WEIGHTS

Fixture Weight	5.4 lbs
Fixture Dimensions	Polycarbonate
Carton Qty	1
Carton Weight	6.5 lbs
Carton Dimensions	13.8 x 8.7 x 8.7 in

ACCESSORIES (SOLD SEPARATELY)

BL01-BASE19	19" Pole & Base Plate
BL01-BASE35	35" Pole & Base Plate
BL01-BASE42	42" Pole & Base Plate
BL01-PLATE	Anchor Bolts & Plate
BL01-VISOR	Visor

NOTE: 19", 35", or 42" Pole & Base (sold separately) is **required for installation**.

WET CONCRETE INSTALLATION: Anchor Bolts & Plate (BL01-PLATE) are **required** for wet concrete installation.

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3G 0G5 | (519) 880-9833