

Projet:	Type:	Qté:
----------------	--------------	-------------

Ceiling Light 9" 18W 120V 3000-4000-5000K

Easy to install and integrated with a CCT selection option, the SpecLite ceiling light will simplify your project. Equipped with a dip switch to select your preferred lighting color between 3000K, 4000K, and 5000K, this light fixture is compatible with 120V (AC) and is available in 2 different finishes (White and Black) and 2 different sizes (9" and 12"). The SpecLite ceiling light is perfect for creating a customized lighting ambiance while being easy to install and use. Its sleek design and flexibility make it an ideal choice for modernizing residential and commercial interiors.



CHARACTERISTICS

- Integrated 3CCT Selection: Choose from three color temperatures for lighting that suits any atmosphere.
- Wide Compatibility: Operates on 120VAC and allows for quick installation and maintenance with Wago connectors.
- TRIAC Dimming: Compatible with Triac dimmers for precise light intensity control.
- Diffuse and Comfortable Lighting: Provides soft, even light, ideal for creating a calming atmosphere.

NOMENCLATURE

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
CE	09	F	B	A	C	018	0	D	SY
Ceiling light	9"	frost	black	120V	3000-4000-5000K	18W	N/A	dim TRIAC	SY

PHOTOMETRIC SPECIFICATIONS

LUMENS	2,000
CCT	3CCT (3500-4000-5000K)
ANGLE	140°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD2835
LED QTY	144
LED VOLTAGE	54V
LED MAX CURRENT	300mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Polycarbonate
HOUSING FINISH	Black
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	0.90 KG
OPERATING TEMP.	-10°C ~ 40°C

ELECTRICAL SPECIFICATIONS


REAL POWER	18 W
VOLTAGE	120V
EFFICIENCY	111.11 lm/w
POWER FACTOR	97 %
T.H.D	20 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	FCC
BARCODE	882110006888
ENVIRONMENTAL	IP44
IK PROTECTION	
SURGE PROTECTION WITH GROUNDING	1.5KV
SURGE PROTECTION WITHOUT GROUNDING	0.9KV

APPLICATION	Indoor
INSTALLATION	Surface Mount
CABLE LENGTH	N/A


DIMENSIONS

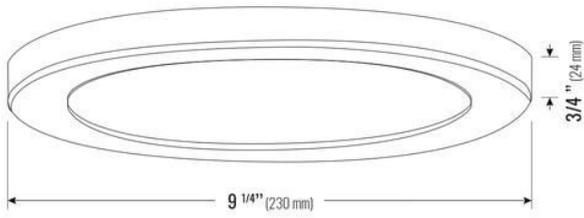

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
24.00 cm X 24.00 cm X 6.00 cm	60.50 cm X 25.00 cm X 25.50 cm	10	11.50 kg	320 
9 1/2 " X 9 1/2 " X 2 3/8 "	23 7/8 " X 9 7/8 " X 10 "		25.35 lbs	

PRODUCTS IMAGES

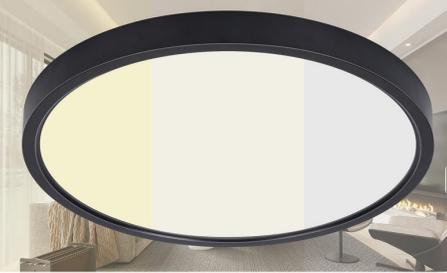

3000K
Warm White

Create a warm atmosphere

4000K
Neutral White

Cozy and casual atmosphere

5000K
Cool White

Widel used in office spaces

One Light 3 Color Temperatures

Don't know which type of white fit for your room ?
Push this button
Choose your favorite color temperature

W

N

C

Switch between three color temperature modes

Compatible with Junction Boxes

