

Projet:	Type:	Qté:
----------------	--------------	-------------

Ceiling Light 9" 20W 120V 2700-3000-3500-4000-5000K

Easy to install and integrated with a CCT selection option, the SpecLite ceiling light will simplify your project. Equipped with a dip switch to select your preferred lighting color between 3000K, 4000K, and 5000K, this light fixture is compatible with 120V (AC) and is available in 2 different finishes (White and Black) and 2 different sizes (9" and 12"). The SpecLite ceiling light is perfect for creating a customized lighting ambiance while being easy to install and use. Its sleek design and flexibility make it an ideal choice for modernizing residential and commercial interiors.



CHARACTERISTICS

- Integrated 3CCT Selection: Choose from three color temperatures for lighting that suits any atmosphere.
- Wide Compatibility: Operates on 120VAC and allows for quick installation and maintenance with Wago connectors.
- TRIAC Dimming: Compatible with Triac dimmers for precise light intensity control.
- Diffuse and Comfortable Lighting: Provides soft, even light, ideal for creating a calming atmosphere.



NOMENCLATURE

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
CE	09	F	W	A	C	020	0	D	QK
Ceiling light	9"	frost	white	120V	2700-3000-3500-4000-5000K	20W	N/A	dim TRIAC	QK

PHOTOMETRIC SPECIFICATIONS

LUMENS	2,200
CCT	5CCT (2700K/3000K/3500K/4000K/5000K)
ANGLE	120°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	108
LED VOLTAGE	260-330V
LED MAX CURRENT	80mA
FLICKER	Not Flicker-Free

ELECTRICAL SPECIFICATIONS

REAL POWER	20 W
VOLTAGE	120V
EFFICIENCY	110 lm/w
POWER FACTOR	90 %
T.H.D	9 %
FREQUENCY	50/60Hz

CERTIFICATIONS


REGULATORY LISTING	cETL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	Yes
BARCODE	882110008554
ENVIRONMENTAL	IP20
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	N/A
SURGE PROTECTION WITHOUT GROUNDING	N/A

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	ABS
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	0.60 KG

OPERATING TEMP.	-10°C ~ 40°C
APPLICATION	Indoor
INSTALLATION	Surface Mount
CABLE LENGTH	N/A

DIMENSIONS

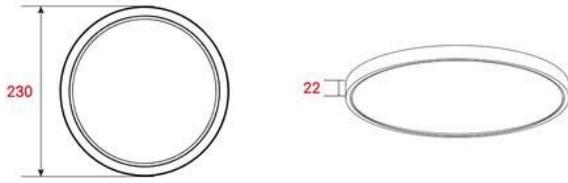

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
25.00 cm X 25.00 cm X 4.00 cm 9 7/8 " X 9 7/8 " X 1 5/8 "	27.00 cm X 27.00 cm X 42.00 cm 10 5/8 " X 10 5/8 " X 16 1/2 "	10	6.80 kg 14.99 lbs	360 

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7