

CANOPIES

CNP40-3CCT+W | CNP100-3CCT+W



HIGHLIGHTS

Slim, Durable Garage And Canopy LED Light With CCT And Wattage Selectable

- Plug & Play Sensor available for motion detection and dimming
- For application in places like parking garage, car port, driveway, underpass, etc
- Fins design on body provides efficient heat dissipation
- High light reflectivity from the reflectors results in an efficient light distribution
- Can be surface mounted directly or, pendant mounted using a G3/4" Conduit Pole. (Conduit Pole not available through ORTECH)



CERTIFICATIONS



COLOUR TEMPERATURE

3500K/ 4000K / 5000K (Selectable)



SPECIFICATIONS

MODEL	CNP40-3CCT+W	CNP100-3CCT+W
Wattage	20W / 30W / 40W	60W / 80W / 100W
Voltage	120-347V AC, 60Hz	120-347V AC, 60Hz
Lumens	135 lm/W	135 lm/W
Beam Angle	150°	150°
Lifetime	50,000 hours	50,000 hours
Dimmable	Yes (0-10v dimming)	Yes (0-10v dimming)
Grade Of Protection	IP65	IP65
CRI	>80Ra	>80Ra
Diffuser/Lens Material	PC	PC
Application	Parking garage, Car port, Driveway, Underpass, etc.	Parking garage, Car port, Driveway, Underpass, etc.
Lamp Bead Model	2835 Lumileds	2835 Lumileds
Operating Temperature	-40°C ~ +45°C	-40°C ~ +45°C

CANOPY LIGHTING, REINVENTED


5 YEAR WARRANTY

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

CANOPIES

CNP40-3CCT+W | CNP100-3CCT+W

DIMENSIONS

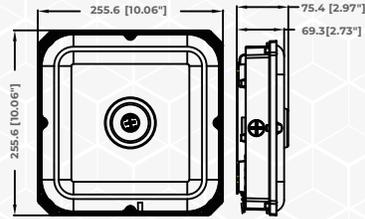

ACCESSORIES (SOLD SEPARATELY)




PNP-SENSOR



PNP-REMOTE

WATTAGE SELECTABLE



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

