

Projet: _____ Type: _____

Canopy light 100-80-60W 120-347V 35-40-50K

CARACTERISTICS

- -
- -
- -
- -



NOMENCLATURE

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
CP	12	F	W	F	C	100	M	D	SS
Canopy	12"	frost	white	120-347V	35-40-50K	100-80-60W	motion	dim 0-10V	SS

PHOTOMETRIC SPECIFICATIONS

LUMENS	12,636
CCT	3500/4000/5000K
ANGLE	150°
C.R.I.	84
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	Motion & Lighting sensor
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	288
LED VOLTAGE	DC180-260V
LED MAX CURRENT	0.44A
FLICKER	Not Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	1.50 KG
OPERATING TEMP.	-40°C ~ 45°C
APPLICATION	Indoor / Outdoor
INSTALLATION	Surface Mount
CABLE LENGTH	N/A


ELECTRICAL SPECIFICATIONS

REAL POWER	96.6 W
VOLTAGE	120-347V
EFFICIENCY	130.81 lm/w
POWER FACTOR	94.2 %
T.H.D	10.9 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-7XHSKT
FCC	No
BARCODE	882110007199
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	4KV
SURGE PROTECTION WITHOUT GROUNDING	4KV

DIMENSIONS

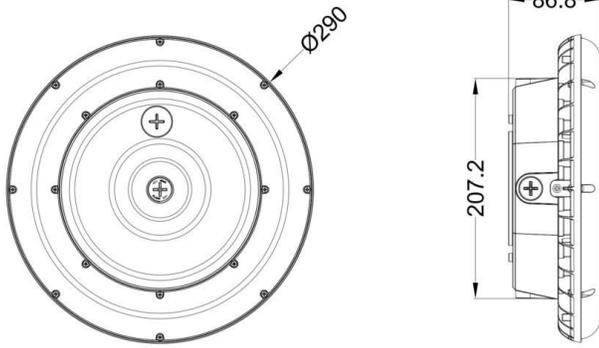

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
32.50 cm X 32.50 cm X 13.80 cm	N/A	N/A	2.20 kg	99
12 3/4 " X 12 3/4 " X 5 3/8 "			4.85 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7