

**Projet:** **Type:**

**Split Downlight 20-15-10W 120-347V 3000-4000-5000K**

Upgrade your lighting with these sleek, color-selectable architectural downlights, designed for effortless installation and a modern look. The reflector with different diameters (4", 6" and 8") could be paired to adapt any installation.

**CHARACTERISTICS**

- Colour Selectable 3000K/4000K/5000K
- 120-347V universal driver
- Wattage Selectable 20W-15W-10W
- Built-in junction box for easy installation



**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
DL	4D	F	S	F	C	020	0	D	OK
Split Downlight	4"	frost	Silver	120-347V	3000-4000-5000K	20-15-10W	N/A	dim 0-10V	OK

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	1,500
CCT	3000K/4000K/5000K
ANGLE	55°
C.R.I.	80
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 3030
LED QTY	48
LED VOLTAGE	30-42V
LED MAX CURRENT	480mA
FLICKER	Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Aluminium
HOUSING FINISH	Silver
LENS MATERIAL	PMMA
LENS FINISH	Frost
WEIGHT	0.40 KG
OPERATING TEMP.	-20°C ~ 45°C
APPLICATION	Indoor
INSTALLATION	Recessed
CABLE LENGTH	N/A

**ELECTRICAL SPECIFICATIONS**


REAL POWER	20 W
VOLTAGE	120-347V
EFFICIENCY	75 lm/w
POWER FACTOR	90 %
T.H.D	20 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	No
BARCODE	882110007960
ENVIRONMENTAL	
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	2KV
SURGE PROTECTION WITHOUT GROUNDING	1KV



## DIMENSIONS

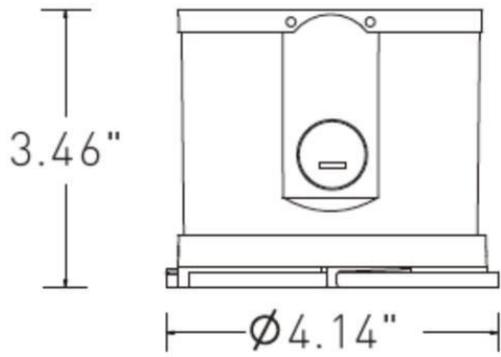

10W IC, 15W IC, 20W IC

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
11.00 cm X 11.00 cm X 9.00 cm	34.50 cm X 23.50 cm X 24.00 cm	12	5.40 kg	624 
4 3/8" X 4 3/8" X 3 1/2"	13 5/8" X 9 1/4" X 9 1/2"		11.90 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7