

Projet: Type:

Emergency Light running man ABS 120-347V 120 mins

SpecLite Emergency Light Running Man, made of impact-resistant thermoplastic ABS, is designed to provide a lightweight and durable solution for safety signage. Certified for use in demanding commercial and industrial environments, this fixture is compatible with a wide range of electrical systems, supporting voltages from 120V to 347V. It can be wall or ceiling mounted, offering installation flexibility. With a power consumption of only 1.5W in emergency mode, this light ensures 120 minutes of autonomy, powered by a reliable NiCad battery. In the event of a power outage, it provides optimal visibility with its clear Running Man icon, ensuring safe evacuation.



CARACTERISTICS

- Emergency Lighting: Integrated battery providing 120 minutes of runtime during a power outage.
- Multiple Output Indicators: 3 directional pictograms to meet all needs.
- Compact and Sturdy Design: Ideal for tight spaces, with enhanced resistance to impacts and wear.
- Versatile Installation: Wall, ceiling, or side installation options available. Electrical wires for wall socket connection sold separately.



NOMENCLATURE

SERIE	LIGHT TYPE	MATERIAL	CASING COLOUR	VOLTAGE	BATTERY RUNTIME	EMERGENCY POWER	BATTERY TYPE	OPTIONS	VER.
EM	RM	A	W	F	12	15	N	0	BY
Emergency light	running man	ABS	white	120-347V	120 mins	1.5W	NiCad		BY

PHOTOMETRIC SPECIFICATIONS

LUMENS	19
CCT	6500K
ANGLE	100°
C.R.I.	70
DIMMABLE	N/A
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	N/A
LED TYPE	SMD2835
LED QTY	14
LED VOLTAGE	3.2V
LED MAX CURRENT	60mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	ABS
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	N/A
WEIGHT	1.86 KG
OPERATING TEMP.	-40°C ~ 40°C
APPLICATION	Indoor

ELECTRICAL SPECIFICATIONS


REAL POWER	4.5 W
VOLTAGE	120-347V
EFFICIENCY	4.22 lm/w
POWER FACTOR	0.4 %
T.H.D	
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	
BARCODE	882110005423
ENVIRONMENTAL	IP20
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	3KV
SURGE PROTECTION WITHOUT GROUNDING	1.8KV

INSTALLATION	Surface Mount
CABLE LENGTH	N/A

DIMENSIONS

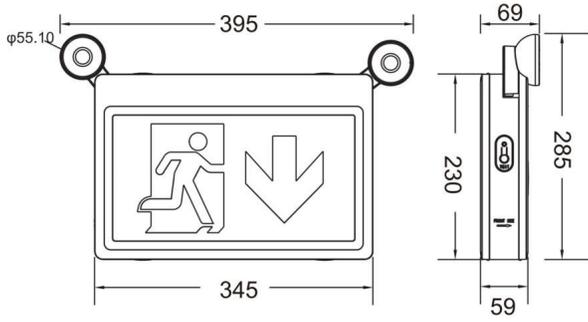

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
35.00 cm X 24.00 cm X 8.00 cm	49.00 cm X 38.00 cm X 26.50 cm	6	11.20 kg	144 
13 3/4 " X 9 1/2 " X 3 1/8 "	19 1/4 " X 15 " X 10 3/8 "		24.69 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7