

Projet: Type:

**Emergency Light running man ABS 120-347V 120 mins**

SpecLite Emergency Light Running Man, made of sturdy thermoplastic ABS, combines lightweight design with impact resistance for reliable safety signage. Certified for commercial and industrial environments, it operates on a voltage range of 120V to 347V, making it compatible with a wide variety of electrical systems. It can be easily installed on walls or ceilings, offering installation flexibility. This model is equipped with a NiCad battery that ensures 120 minutes of autonomy, providing continuous visibility through its dual directional head lighting. The clearly visible 'Running Man' icon offers optimal guidance towards emergency exits, even in the event of a power outage.



**CARACTERISTICS**

- Emergency Lighting: Integrated battery providing 120 minutes of runtime during a power outage.
- Multiple Output Indicators: 3 pictograms to represent different directions, addressing all needs.
- 2 Omnidirectional Swivel Lights of 1W: Ensures improved coverage for emergency lighting.
- Versatile Installation: Wall, ceiling, or side mounting options available. Electrical wires for wall socket connection sold separately.

**NOMENCLATURE**

SERIE	LIGHT TYPE	MATERIAL	CASING COLOUR	VOLTAGE	BATTERY RUNTIME	EMERGENCY POWER	BATTERY TYPE	OPTIONS	VER.
EM	RM	A	W	F	12	35	N	0	BY
Emergency light	running man	ABS	white	120-347V	120 mins	1.5W + 2x1.0W	NiCad		BY

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	0
CCT	6500K
ANGLE	100°
C.R.I.	70
DIMMABLE	N/A
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	N/A
LED TYPE	SMD2835
LED QTY	14
LED VOLTAGE	3-3.4V
LED MAX CURRENT	150mA
FLICKER	Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	ABS
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	N/A
WEIGHT	1.86 KG
OPERATING TEMP.	-40°C ~ 40°C
APPLICATION	Indoor

**ELECTRICAL SPECIFICATIONS**


REAL POWER	4.5 W
VOLTAGE	120-347V
EFFICIENCY	lm/w
POWER FACTOR	0.5 %
T.H.D	
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	
BARCODE	882110005553
ENVIRONMENTAL	IP20
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	3KV
SURGE PROTECTION WITHOUT GROUNDING	1KV

<b>INSTALLATION</b>	Surface Mount
<b>CABLE LENGTH</b>	N/A

## DIMENSIONS

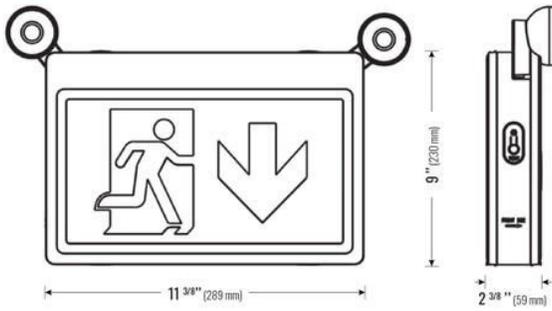

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
35.00 cm X 24.00 cm X 8.00 cm 13 3/4 " X 9 1/2 " X 3 1/8 "	49.00 cm X 38.00 cm X 26.50 cm 19 1/4 " X 15 " X 10 3/8 "	6	11.20 kg 24.69 lbs	144 

## PRODUCTS IMAGES

