

Projet: _____ **Type:** _____

Emergency Light battery w/ double head 2X2W steel 120-347V 120 mins

The Speclite 36W Emergency Light Battery with Double Head, made from durable steel with an elegant white finish, offers a robust and reliable solution for emergency situations. Compatible with voltages from 120V to 347V, this model is ideal for a wide range of commercial and industrial installations. It operates with a sealed lead-acid battery, providing 120 minutes of autonomy on a 10W load for continuous visibility during power outages. Equipped with a 6V 7Ah output, it powers both single and double remote heads, supporting a maximum load of 36W for 30 minutes. At 36W, this battery can support up to 8 additional double-head remote fixtures, in addition to its own 2x2W heads. This battery unit ensures efficient lighting coverage, even in the most demanding environments, offering a complete safety solution. Its compact design and sturdy construction allow for easy wall installation, delivering reliable performance and increased durability.



CARACTERISTICS

- **Emergency Lighting:** Integrated battery ensuring 30 minutes (with a 36W load) of runtime during a power outage.
- **Multiple Capacity:** Designed to power multiple emergency lights and satellite beacons simultaneously.
- **Compact and Sturdy Design:** Durable steel construction, optimized for demanding industrial environments.
- **Easy Installation:** Electrical wires for connection to a wall socket sold separately.

NOMENCLATURE

SERIE	LIGHT TYPE	MATERIAL	CASING COLOUR	VOLTAGE	BATTERY RUNTIME	EMERGENCY POWER	BATTERY TYPE	OPTIONS	VER.
EM	B2	S	W	F	12	40	L	0	BY
Emergency light	battery w/ double head 2X2W	steel	white	120-347V	120 mins	36W 36mins	Lead acid		BY

PHOTOMETRIC SPECIFICATIONS

LUMENS	200
CCT	6500K
ANGLE	40
C.R.I.	80
DIMMABLE	N/A
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	N/A
LED TYPE	SMD 2835
LED QTY	6
LED VOLTAGE	2.9-3.2V
LED MAX CURRENT	60mA
FLICKER	

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Steel
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	3.50 KG

ELECTRICAL SPECIFICATIONS


REAL POWER	3.5 W
VOLTAGE	120-347V
EFFICIENCY	57.14 lm/w
POWER FACTOR	0.7 %
T.H.D	
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	
BARCODE	882110007137
ENVIRONMENTAL	
IK PROTECTION	
SURGE PROTECTION WITH GROUNDING	
SURGE PROTECTION WITHOUT GROUNDING	

OPERATING TEMP.	-40°C ~ 45°C
APPLICATION	Indoor
INSTALLATION	Surface Mount
CABLE LENGTH	N/A


DIMENSIONS

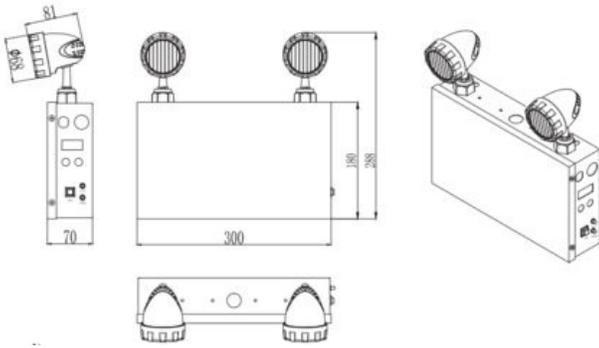

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
34.00 cm X 28.00 cm X 11.00 cm	44.80 cm X 35.50 cm X 30.00 cm	4	15.20 kg	96 
13 3/8 " X 11 " X 4 3/8 "	17 5/8 " X 14 " X 11 3/4 "		33.51 lbs	

PRODUCTS IMAGES

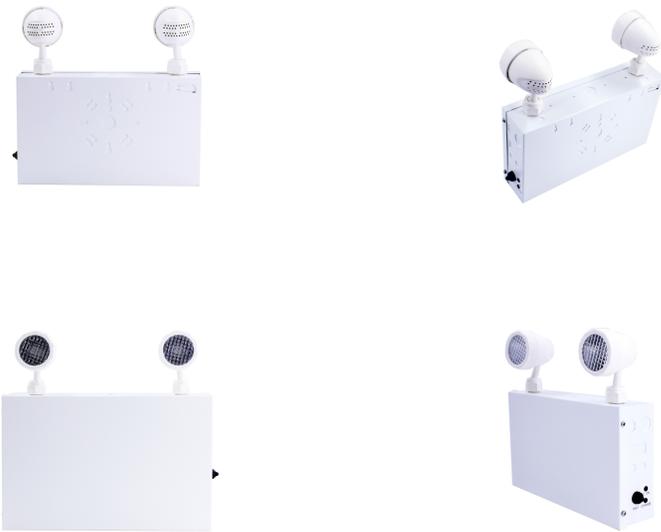

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7