

**Projet:** \_\_\_\_\_ **Type:** \_\_\_\_\_

**Emergency Light running man ABS 120-347V 180 mins**

The SpecLite emergency exit luminaire, made from durable thermoplastic ABS, stands out for its lightweight, sleek design and high impact resistance, making it an ideal solution for commercial and industrial environments. Compatible with voltages ranging from 120V to 347V, it easily integrates into various electrical systems. Equipped with a NiCad battery offering an exceptional 180-minute autonomy—double the Canadian standard of 90 minutes—this luminaire ensures continuous visibility in the event of a power outage. Its translucent design makes it a perfect choice to meet the highest architectural standards.

**CARACTERISTICS**

- Emergency Lighting: Integrated battery providing an exceptional 180 minutes of runtime during a power outage, exceeding the Canadian standard of 90 minutes.
- Translucent Design: Perfect for your architectural lighting projects.
- Multiple Output Indicators: 3 pictograms to represent different directions, catering to all needs.
- Easy Ceiling Installation: Features a sleek design for seamless integration.



**NOMENCLATURE**

SERIE	LIGHT TYPE	MATERIAL	CASING COLOUR	VOLTAGE	BATTERY RUNTIME	EMERGENCY POWER	BATTERY TYPE	OPTIONS	VER.
EM	RM	A	W	F	18	05	N	0	BY
Emergency light	running man	ABS	white	120-347V	180 mins	0.5W	NiCad		BY

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	20
CCT	6500K
ANGLE	102
C.R.I.	75
DIMMABLE	N/A
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	N/A
LED TYPE	4014
LED QTY	16pcs
LED VOLTAGE	3-6V
LED MAX CURRENT	0.35A
FLICKER	

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	ABS
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	N/A
WEIGHT	0.90 KG
OPERATING TEMP.	
APPLICATION	Indoor

**ELECTRICAL SPECIFICATIONS**


REAL POWER	4.5 W
VOLTAGE	120-347V
EFFICIENCY	4.44 lm/w
POWER FACTOR	0.4 %
T.H.D	14.8 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	Yes
BARCODE	882110007113
ENVIRONMENTAL	IP40
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	1KV
SURGE PROTECTION WITHOUT GROUNDING	0.5KV

<b>INSTALLATION</b>	Surface Mount
<b>CABLE LENGTH</b>	N/A

## DIMENSIONS

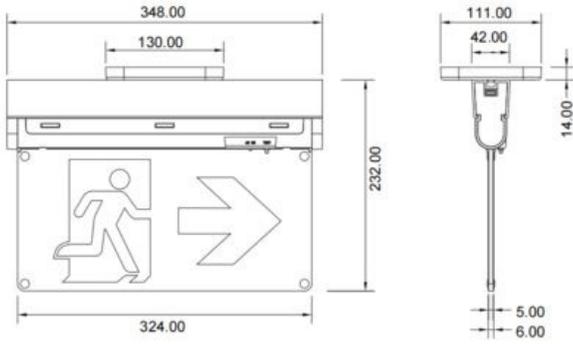

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
37.00 cm X 25.00 cm X 5.00 cm	51.00 cm X 47.00 cm X 39.00 cm	20	21.00 kg	240 
14 5/8 " X 9 7/8 " X 2 "	20 1/8 " X 18 1/2 " X 15 3/8 "		46.30 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7